



A KOHLER COMPANY

Brella™ Comfort Height®

Elongated toilet

402095

Features

- Two-piece toilet.
- Elongated bowl offers added room and comfort.
- Skirted trapway simplifies cleaning.
- Comfort Height feature offers chair-height ADA-compliant seating.
- 1.28 gallons per flush (gpf).
- Standard left-hand Polished Chrome trip lever included.
- 2-inch fully glazed trapway.
- Combination consists of the 402101 bowl and 402098 tank.
- Standard 12" (305 mm) rough-in only. Cannot be combined with K-5383, or K-5381 for use in 10" or 14" installations.

Material

- Vitreous china.

Technology

- Uses the force of gravity and a precision-engineered tank, bowl, and trapway to deliver virtually plug-free performance.

Installation

- Standard 12-inch rough-in.
- Patented ReadyLock™ installation system is a simple solution for skirted toilets that saves time, hassle, and eliminates the need to drill into the floor for a standard 12-inch rough-in.
- Seat and supply line not included.

Recommended Products/Accessories

- K-4008 Reveal® Quiet-Close™ Elongated Toilet Seat
- K-7637 Angle Supply with Stop (single)


Included Components

Product consists of:

- 402098 1.28 gpf toilet tank with left-hand trip lever
- 402101 Elongated toilet bowl

Additional Components:

- ReadyLock™ installation system
- Tank cover
- Trip lever

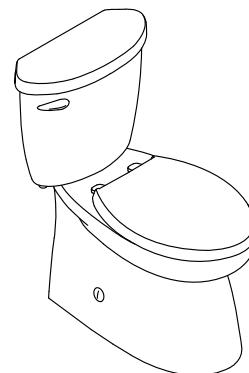

ADA CSA B651 OBC

Codes/Standards

- DOE - Energy Policy Act 1992
- EPA WaterSense®
- California Energy Commission (CEC)
- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC

STERLING® Warranty - Toilets and Lavatories

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


	0	White
--	---	-------

1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.sterlingplumbing.com.

9-7-2019 10:28 - US

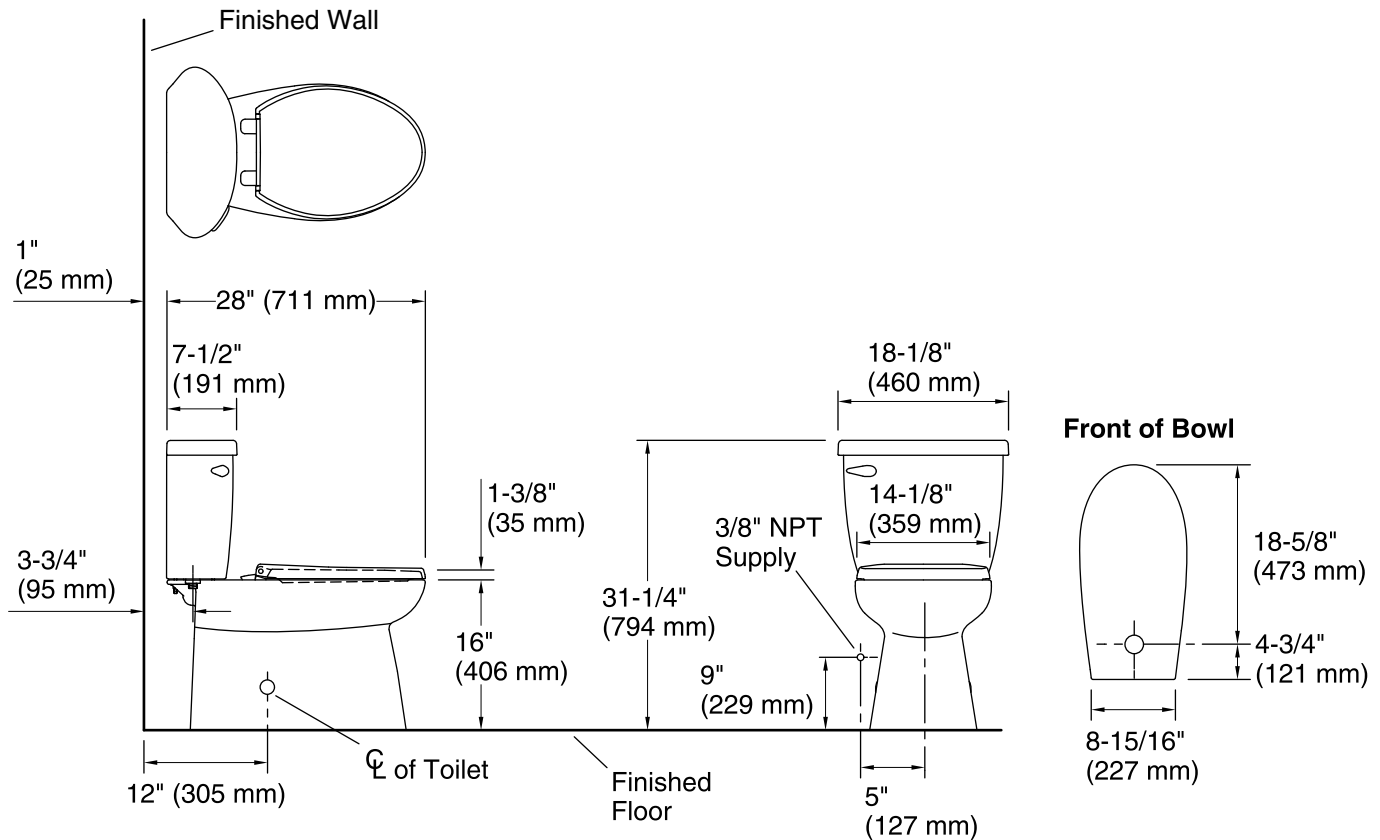

Technical Information

All product dimensions are nominal.

- Toilet type: Two-piece, Floor-mount
- Waste Outlet: Floor
- Bowl shape: Elongated
- Trap passageway: 2" (51 mm)
- Water Consumption
 - Full: 1.28 gpf (4.8 lpf)
- Water surface size: 5-1/16" x 4-9/16" (129 mm x 115 mm)
- Rim to water surface: 8-9/16" (217 mm)
- Rough-in: 12" (305 mm)
- Seat-mounting holes: 5-1/2" (140 mm)

Fixture Supply Requirements

- Min static pressure: 15 psi (103.4 kPa)
- Max static pressure: 80 psi (551.6 kPa)

Notes

- Install this product according to the installation instructions.
- ADA compliance will require a seat 1-inch thick minimum.
- ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.
- Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.
- Accessibility standards may require controls to be located on the open side of the toilet.