



# Single-handle bathroom sink faucet, 0.5 gpm 27371-4N

#### **Features**

- A single handle controls both on/off activation and temperature setting
- 5" (127 mm) spout reach
- 0.5 gpm (1.9 lpm) maximum flow rate at 60 psi (4.14 bar)
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Clicker drain with tailpiece
- Coordinates with other products in the Medley collection

## Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

# Installation

- For single-hole or 4" (102 mm) centerset installation (escutcheon plate included)
- Deck-mount
- Preattached flexible supply lines simplify installation

## **Recommended Products/Accessories**

K-23726 Drain treatment



ADA CSA B651 OBC

## Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

# STERLING® Faucet Lifetime Limited Warranty

See website for detailed warranty information.


# **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel

# **Medley®**

# Single-handle bathroom sink faucet, 0.5 gpm 27371-4N

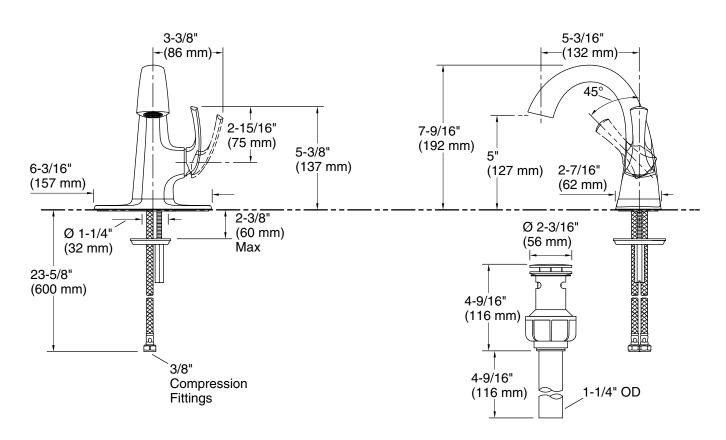

# **Technical Information**

All product dimensions are nominal.

Faucet flow rate:

0.5 gal/min (1.9 l/min)

Drain included:

Yes

**Spout:** 

Spout reach:

5-3/16" (132 mm)

#### **Notes**

Install this product according to the installation instructions

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.