

Windham™

Two-piece elongated toilet, 1.28 gpf 402322-WRA

Features

- Two-piece design
- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.28 gpf (4.8 lpf)
- Color-matched right-hand white trip lever included
- 2-1/8" (54 mm) fully glazed trapway
- Combination consists of 403317 bowl and 402362-WRA tank
- Pro Force® Plus flushing technology delivers greater flushing power than previous Pro Force® models

Installation

- Three-bolt quick-connect installation
- Standard 12" (305 mm) rough-in
- Seat and supply line sold separately

Recommended Products/Accessories

K-4774 Brevia™ Quick-Release™ elongated toilet seat

Included Components

402362-WRA Toilet tank, 1.28 gpf 403317 Elongated chair height toilet bowl





CSA B651 ADA

OBC

Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 **CSA B651** OBC

STERLING® Toilet Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

White



Windham™

Two-piece elongated toilet, 1.28 gpf 402322-WRA

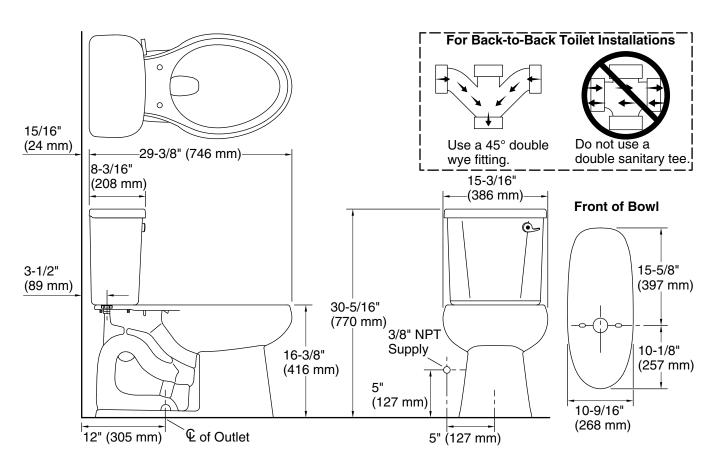

Technical Information

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor

Flush type: ProForce Plus
Trap passageway: 2-1/8" (54 mm)
Rim to water 6-1/4" (159 mm)

surface:

Fixture Supply Requirements

Min static pressure: 20 psi (137.9 kPa)
Max static pressure: 80 psi (551.6 kPa)
Min flowing 15 psi (103.4 kPa)

pressure:

Min flow rate: 1 gpm (3.8 lpm)

Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.