

Features

- Compression molded from our exclusive solid Vikrell® material
- Bath and integral apron eliminates installation step
- Tongue-and-groove 4-piece modular design allows for easy "snap together" installation
- Durable high-gloss finish
- 10-year consumer/3-year commercial limited warranty
- Wall surround allows for attachment of grab bars
- 60" (152.4 cm) x 31-1/4" (79.4 cm) x 73-1/4" (186.1 cm) complete unit rough-in dimensions includes flange
- 60" (152.4 cm) x 30" (76.2 cm) x 72" (182.9 cm) complete unit finished dimensions


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASTM E162
- ASTM E662
- CSA B45.5/IAPMO Z124
- HUD, UM Bulletin 73A
- NAHB Research Foundation, Inc.

60" (152.4 cm) BATH/SHOWER SYSTEM WITH BACKER BOARDS

61030116
ALSO 61030126

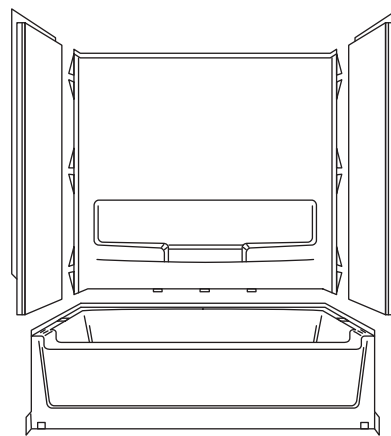

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Complete Unit Description	Colors/Finishes	
61030116	60" (152.4 cm) bath/shower and wall surround with backer boards, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
61030126	60" (152.4 cm) bath/shower and wall surround with backer boards, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Model	Wall Component Description	Colors/Finishes	
61034106	Complete wall set with backer boards	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Technical Information

Fixture*:		
Bathing well	56-3/4" (144.1 cm) x 25-1/4" (64.1 cm)	
Top area	60" (152.4 cm) x 30-5/8" (77.8 cm)	
To overflow:		
Water depth	9-3/8" (23.8 cm)	
Capacity	42 gal (159 L)	
* Approximate measurements for comparison only.		
Model	door maximum width	door maximum height
61030116	56-3/4"	57"
61030126	(144.1 cm)	(144.8 cm)

Installation Notes

Install this product according to the installation guide.


Size the drain cutout to fit the drain assembly that will be used.

End stud positioning is critical if nailing-in flanges are used.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown for support clip or roofing nail installation.

Attach grab bars at the specified backer board locations only.

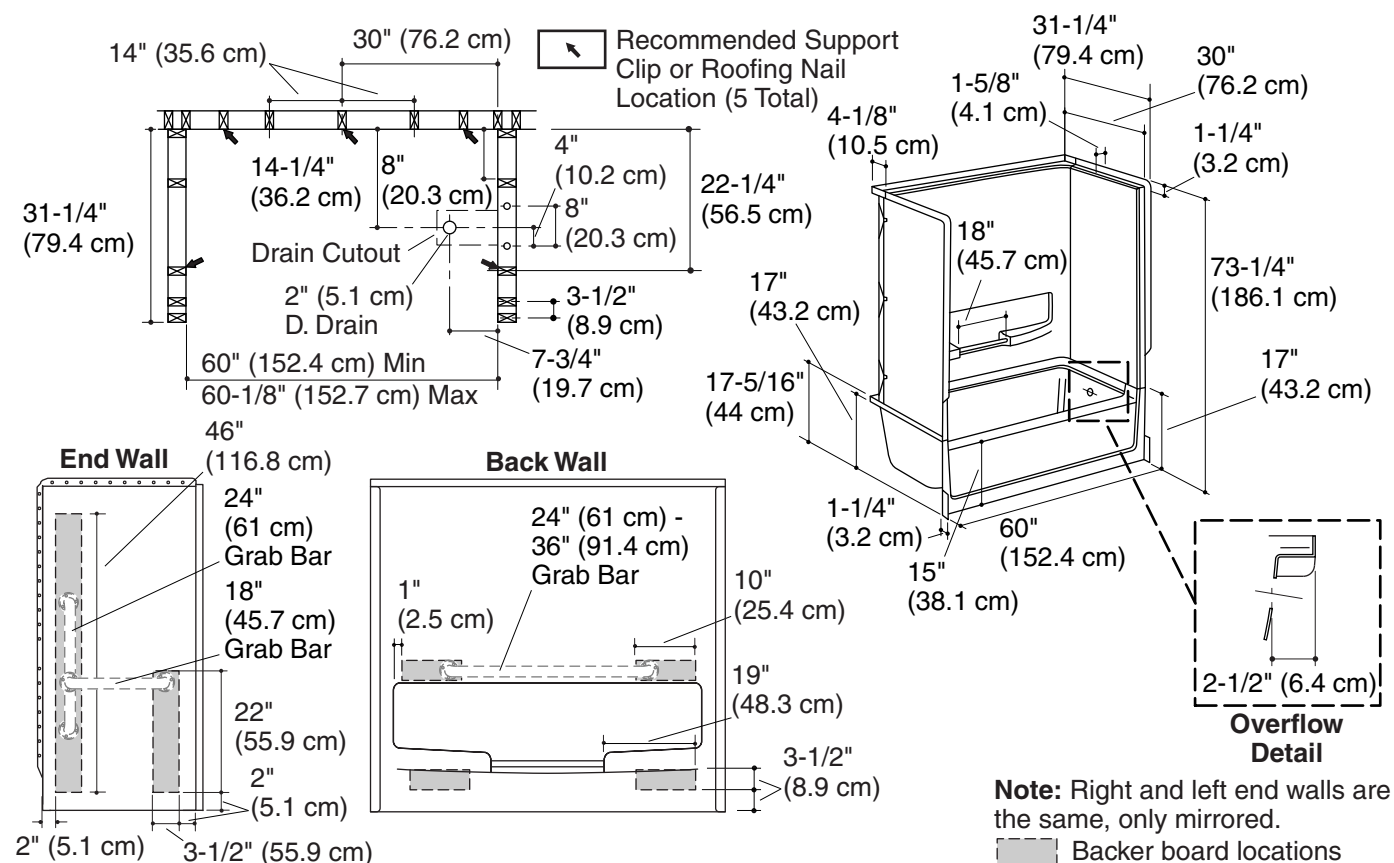

Product Diagram