



**Accord®**

48" x 36" Vikrell® shower with Aging in Place  
backerboards, center drain  
**72260106**



### Features

- 3-1/2" threshold
- Durable high-gloss finish
- Pivot snap-together modular design
- Geometric back-wall design
- Convenient shelves provide generous storage space
- Aging in Place backerboards

### Material

- Made from solid Vikrell® material for strength, durability, and lasting beauty

### Installation

- Alcove
- Center drain
- Caulk-free installation

### Recommended Products/Accessories

1500D-48 Framed pivot shower door  
5475-48 Frameless sliding shower door  
5970-48 Framed sliding shower door  
5975-48 Framed sliding shower door  
5976-48 Framed sliding shower door  
547808-48 Frameless sliding shower door  
581075-48 Frameless sliding shower door  
80001012 12" straight grab bar  
80001018 18" straight grab bar  
80001024 24" straight grab bar  
80011032 32" straight grab bar  
80001036 36" straight grab bar  
80012031 28" curved grab bar  
K-23726 Drain treatment  
K-23733 Vikrell® cleaner

### Included Components

72245106 36" Vikrell® shower end wall set with Aging in Place backerboards  
72261100 48" x 36" Vikrell® shower base, center drain  
72262106 48" Vikrell® shower back wall with Aging in Place backerboards



### Codes/Standards

CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
HUD, UM Bulletin 73  
IAPMO Certification


### STERLING® Vikrell® or Acrylic Baths and Shower Bases Ten-Year Limited Warranty


See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	0	White
---	---	-------

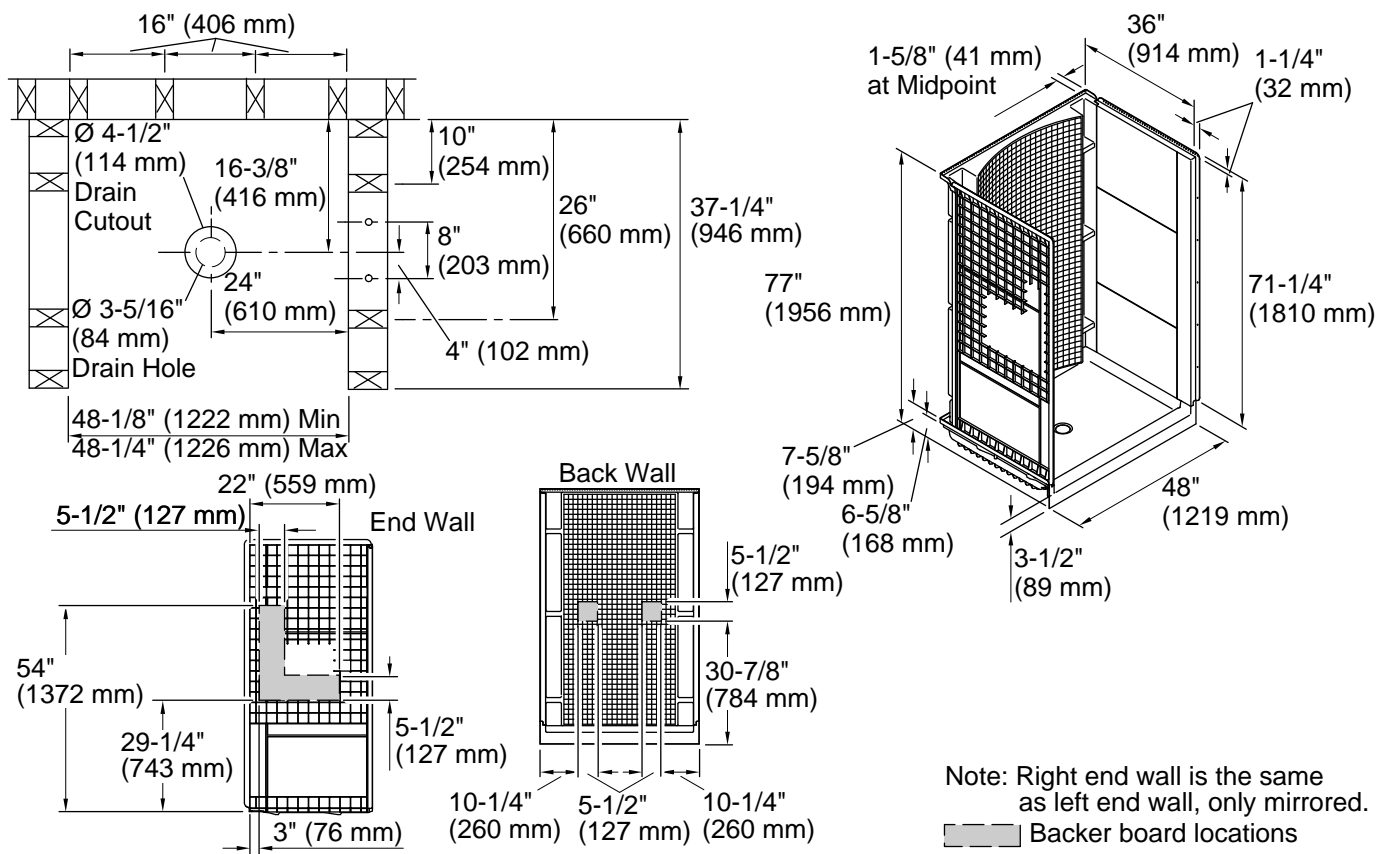

### Technical Information

All product dimensions are nominal.

Drain location:	Center
Minimum flat for door:	3-1/4" (83 mm)
Maximum door height:	72" (1829 mm)
Maximum door width:	44-5/8" (1133 mm)

### Notes

Install this product according to the installation instructions.

Receptor cannot be installed without the wall surround.

Attach grab bars at the specified backerboard locations only.

Studs should be positioned roughly as shown. Double studding is recommended for pivot shower door installations.