



# Ensemble™ Curve

48" x 34" Vikrell® shower with Aging in Place  
backerboards, center drain  
**72360106**



## Features

- 3-1/8" (79 mm) threshold
- Easy-to-clean, durable high-gloss finish
- Three-piece tongue-and-groove walls with snap-together installation
- Modular design allows it to be moved around corners and through doorways with ease
- Curved wall design for a smooth look and feel
- Convenient shelves provide generous storage space
- Shaving ledge/footrest for added comfort
- Factory-installed Aging in Place backerboards for future grab bar installation

## Material

- Compression-molded from our exclusive solid Vikrell® material

## Installation

- Alcove
- Center drain
- Caulk-free installation

## Recommended Products/Accessories

5475-48 Frameless sliding shower door  
547808-48 Frameless sliding shower door  
581075-48 Frameless sliding shower door  
5960-48 Framed sliding shower door  
1500D-48 Framed pivot shower door  
K-23733 Vikrell® cleaner  
80001018 18" straight grab bar  
80001036 36" straight grab bar

## Included Components

72321100 48" x 34" Vikrell® shower base, center drain  
72345106 34" Vikrell® shower end wall set with Aging in Place backerboards  
72362106 48" Vikrell® shower back wall with Aging in Place backerboards



## Codes/Standards

CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
HUD, UM Bulletin 73


## STERLING® Vikrell® or Acrylic Baths and Shower Bases Ten-Year Limited Warranty

See website for detailed warranty information.


## Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	0	White
---	---	-------

**Ensemble™ Curve**  
48" x 34" Vikrell® shower with Aging in Place  
backerboards, center drain  
**72360106**

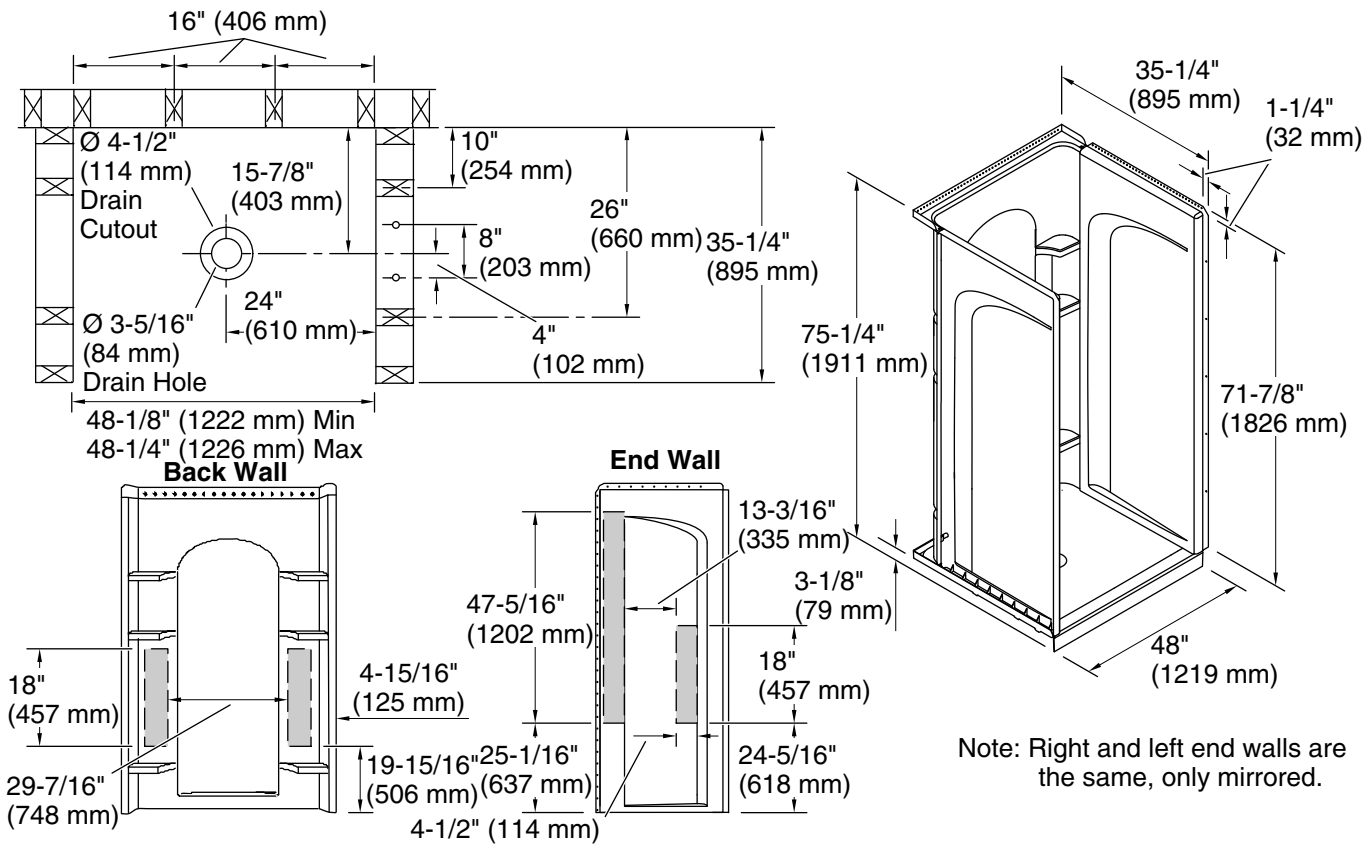

**Technical Information**

All product dimensions are nominal.

Drain location:	Center
Weight:	126.6 lbs (57.4 kg)
Minimum flat for door:	2-1/2" (64 mm)
Maximum door height:	70-1/2" (1791 mm)
Maximum door width:	44-5/8" (1134 mm)

**Notes**

Install this product according to the installation instructions.