



Ludington®
Rite-Temp® valve trim
TS33595-4

Features

- A single handle controls both on/off activation and temperature setting
- Antiscald protection
- Coordinates with other products in the Ludington collection

Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Installation

- Trim only; requires valve to complete installation (sold separately)



ADA

CSA B651

OBC

Codes/Standards

ASME A112.18.1/CSA B125.1

ADA



ICC/ANSI A117.1

CSA B651

OBC

**STERLING® Faucet Lifetime Limited
Warranty**

See website for detailed warranty information.

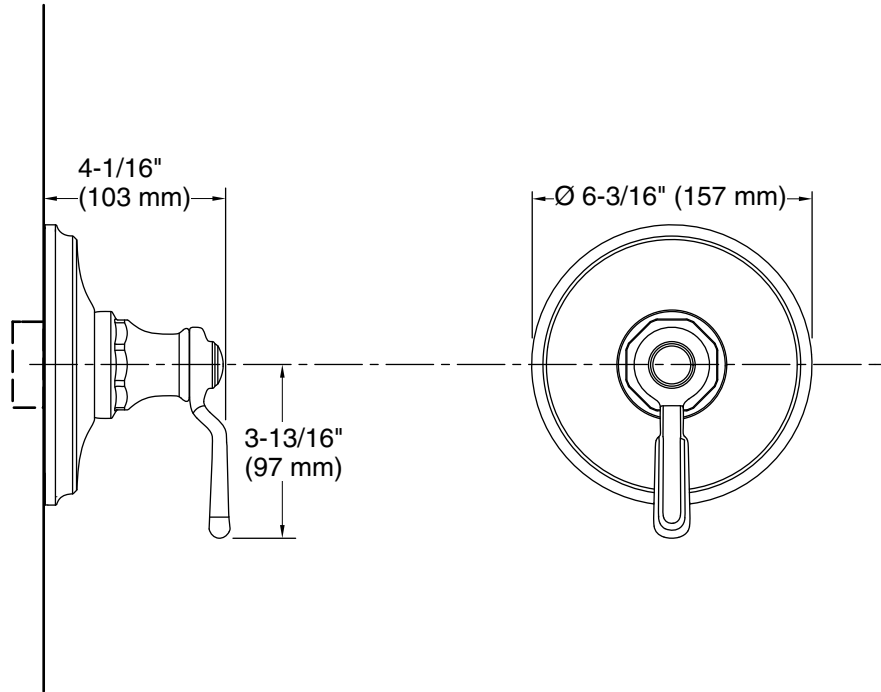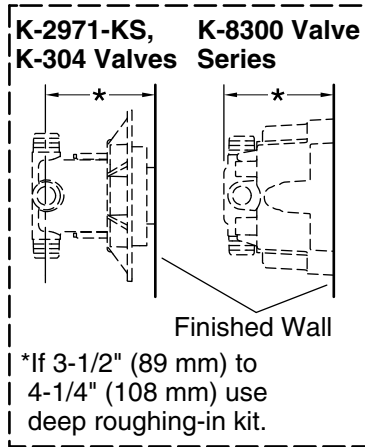

Technical Information

All product dimensions are nominal.

Spout:

Notes

Install this product according to the installation guide.

NOTICE: Risk of product damage. Long screws, for installing trim, can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.