


## Features

- Fits most fiberglass surround units
- Anodized aluminum-framed swinging glass door
- Drip rail attachment directs water back into the shower and minimizes soap or lint build up
- Installs left or right-handed
- No top track allows easy access into the shower
- Two-piece hinge and strike assembly allow for 3/4" (2cm) out-of-plumb adjustability
- Cast pull handle provides easy opening
- Tempered glass ensures maximum safety and durability
- Frame components extruded from aluminum alloy 6063-T5
- Stainless steel hardware avoids rusting or corrosion

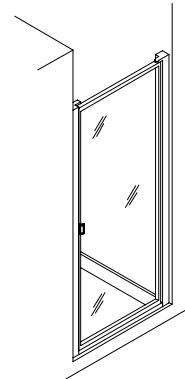

## Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z97.1 (tempered glass)

## Colors/Finishes

- S Silver

## Specified Model

Model	Application	Glass Texture	Pattern	* Frame Colors/Finishes
950C-24*	Shower	Hammered	None	□S
950C-28*	Shower	Hammered	None	□S
950C-30*	Shower	Hammered	None	□S
950C-32*	Shower	Hammered	None	□S
950C-36*	Shower	Hammered	None	□S

\* Note: Add appropriate color/finish code to the end of the unit model # when ordering

## SterlingPlumbing.com

Visit us online for fixture color choices, detailed product information, color photos, installation instructions, care and cleaning guides and warranties. Sterling offers a complete line of plumbing products to complement the Sterling product you've chosen. You may also call our Kohler Plumbing Answer Center from within the U.S.A. at 1-888-STERLING in addition to consulting with your local dealer. Sterling. Strong. Professional. Design.

# BATH BASICS™

Model	A (Max./Min. Width)	B (Height)	C (Walk Through Max.)
950C-24*	25" (63.5cm)/23-1/2" (59.7cm)	64" (162.6cm)	21-3/16" (53.8cm)
950C-28*	28-1/2" (72.4cm)/27" (68.6cm)	64" (162.6cm)	24-11/16" (62.7cm)
950C-30*	30-1/2" (77.5cm)/29" (73.7cm)	64" (162.6cm)	26-11/16" (67.8cm)
950C-32*	32-1/2" (82.6cm)/31" (78.7cm)	64" (162.6cm)	28-11/16" (72.9cm)
950C-36*	36" (91.4cm)/34-1/2" (87.6cm)	64" (162.6cm)	32-3/16" (81.8cm)

