# **STERLING**

A KOHLER, COMPANY

#### Features

- Heavy-duty, anodized aluminum-framed glass doors
- Aluminum components extruded from alloy 6063-T5
- Tempered glass ensures maximum safety and durability
- Threshold directs water back into the shower and minimizes soap or lint build up
- Pivot bushings provide silent operation
- Installs left- or right-handed
- Adjustable wall jamb allows for out-of-plumb conditions up to 1" (2.5 cm) per side
- A width adjustment of 3-1/2" (8.9 cm) per model reduces inventory requirements
- Full length magnet provides secure door closure
- Full length handle for easy operation
- Stainless steel hardware prevents rusting or corrosion

#### **Codes/Standards Applicable**

Specified model meets or exceeds the following:

ANSI Z97.1 (tempered glass)



#### **Colors/Finishes**

Refer to the Price Book for current frame finish and glass options

#### **Specified Model**


Model	Width (A)* (Min/Max)	Height (B)*	Walk Through (C)* (Min/Max)
1500D-26**	26-1/2" (67.3 cm) / 23" (58.4 cm)	65-1/2" (166.4 cm)	17-5/16" (44 cm) / 14-1/2" (36.8 cm)
1500D-27**	27-1/2" (69.9 cm) / 24" (61 cm)	65-1/2" (166.4 cm)	18-5/216" (46.5 cm) / 15-1/2" (39.4 cm)
1505D-27**	27-1/2" (69.9 cm) / 24" (61 cm)	65-1/2" (166.4 cm)	18-5/216" (46.5 cm) / 15-1/2" (39.4 cm)
* Note: Consult the diagram on the next page for the location of the measurements.			

\*\* Note: Add appropriate frame color/finish code to the end of the unit model # when ordering.

## VISTA PIVOT<sup>TM</sup> II

SHOWER DOORS 1500D ALSO 1505D

### VISTA PIVOTTM II

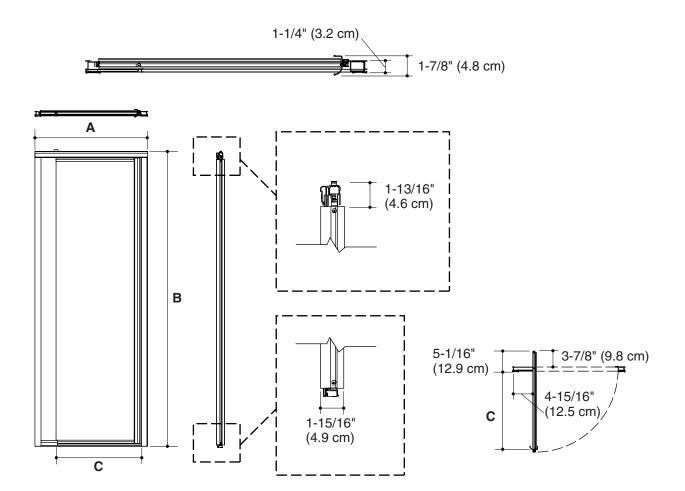

**Product Diagram** 

