

## Features

- Compression molded from our exclusive solid Vikrell® material
- Integral apron with removable access panel
- Durable high-gloss finish
- Pump with air switch and grounding-type plug-in cord
- 6 Jets
- Optional three-piece wall set with generous storage shelves
- 10-year consumer/3-year commercial limited warranty
- 16" (40.6 cm) whirlpool bath depth (floor to top of threshold)
- 60-1/4" (153 cm) x 43-1/2" (110.5 cm) x 20" (50.8 cm) complete unit rough-in dimensions include flange
- 60" (152.4 cm) x 42" (106.7 cm) x 19" (48.3 cm) complete unit finished dimensions include wainscot

## Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7M
- ANSI Z124.1.2
- ASTM E162
- ASTM E662
- UL 1795
- HUD, UM Bulletin 73A


## Specified Model

Model	Description	Colors/Finishes	
76111110	42" (106.7 cm) whirlpool bath, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
76111120	42" (106.7 cm) whirlpool bath, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

## 42" (106.7 cm) WHIRLPOOL BATH

**76111110**

**ALSO 76111120**

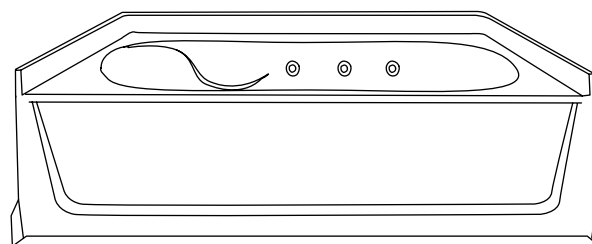

## Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

# ENSEMBLE™

## Technical Information

Fixture*:			
Basin area:			
Bathing well	40" (101.6 cm) x 27" (68.6 cm)		
Top area	52" (132.1 cm) x 35" (88.9 cm)		
To overflow:			
Water depth	11" (27.9 cm)		
Capacity	55 gal (208.2 L)		
* Approximate measurements for comparison only.			
Pump:	V	Hz	A
1-speed	120	60	7
Model	Door maximum width	Door maximum height	
76111110 76111120	*58" (147.3 cm)	*NA	
* Varies with alternative walls.			

## Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump	120 V, 15 A, 60 Hz
------	--------------------

## Installation Notes

Install this product according to the installation guide.


Pump is supplied with a grounding type plug-in cord. Locate the outlet behind the whirlpool, and within 24" (61 cm) of the pump.

Do not disassemble the pump or piping as this could void the warranty.

Size the drain cutout to fit the drain assembly that will be used.

End stud positioning is critical if apron nailing-in flanges are to be used.

Studs should be positioned roughly as shown.

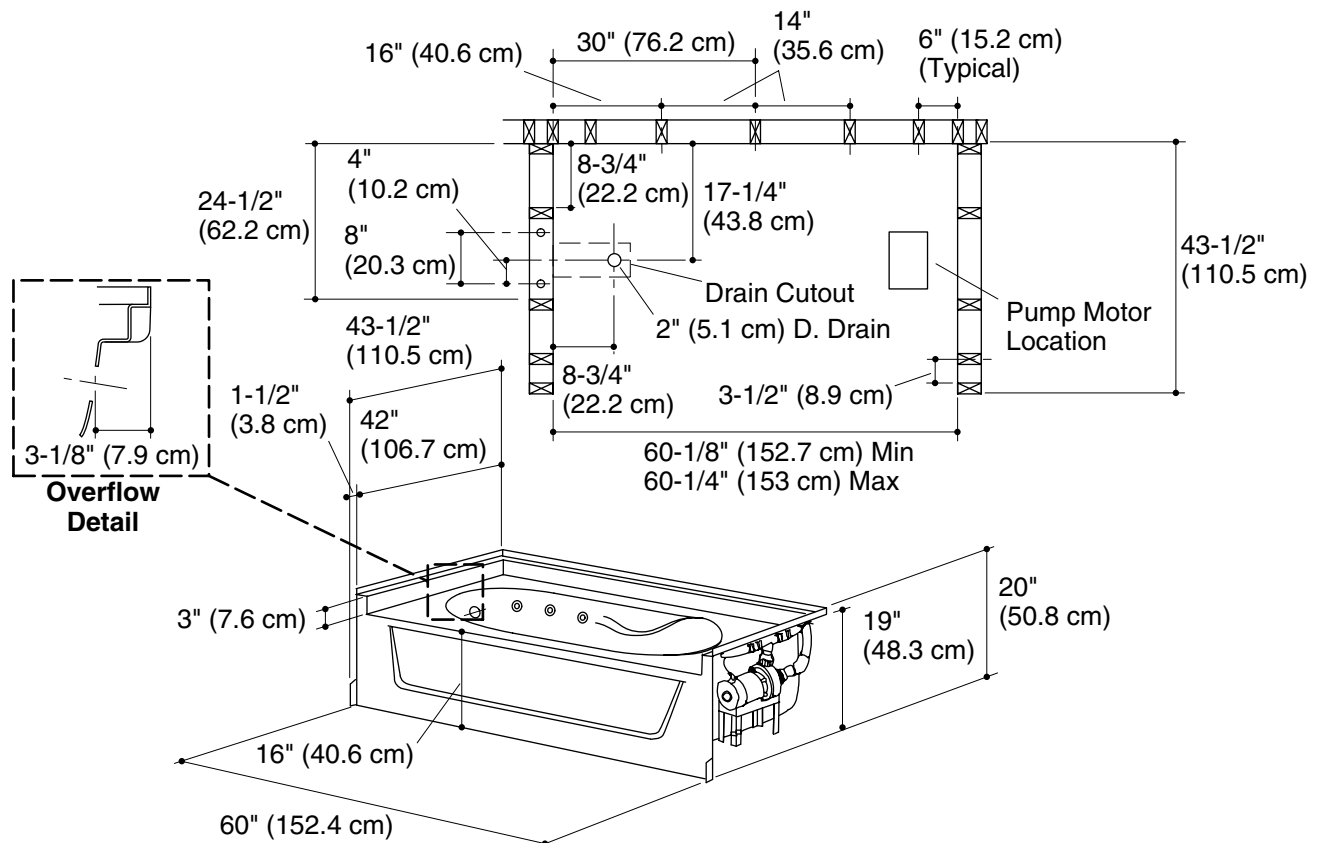

**Product Diagram**