



All Pro® Performa™

60" Bath/Shower

61040120



Features

- Durable high gloss finish.
- Acrylic towel bar included on back wall.
- Modular design allows it to be moved around corners and through doorways with ease.
- 15" (381 mm) bath depth (floor to top of threshold).
- 60" (1524 mm) x 30" (762 mm) x 72-3/4" (1848 mm) complete unit finished dimensions.

Material

- Compression molded from our exclusive solid Vikrell® material.


Installation

- Tongue-and-groove four piece modular design allows for easy snap together installation.
- Caulk is required in seams for proper installation.

Components

Product includes:

61044100 60" Bath/Shower Wall Set

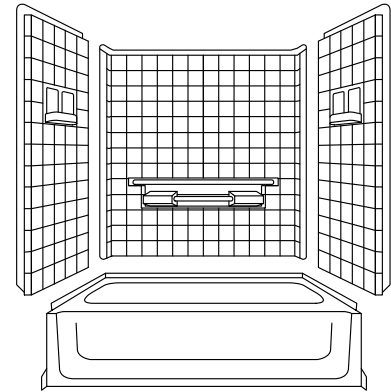

Codes/Standards

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

Greenguard UL 2818 - Gold

HUD, UM Bulletin 73

STERLING® Warranty - Fixtures Made of Solid Vikrell Material

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.


Color	Code	Description
-------	------	-------------



0	White
---	-------



96	Biscuit
----	---------

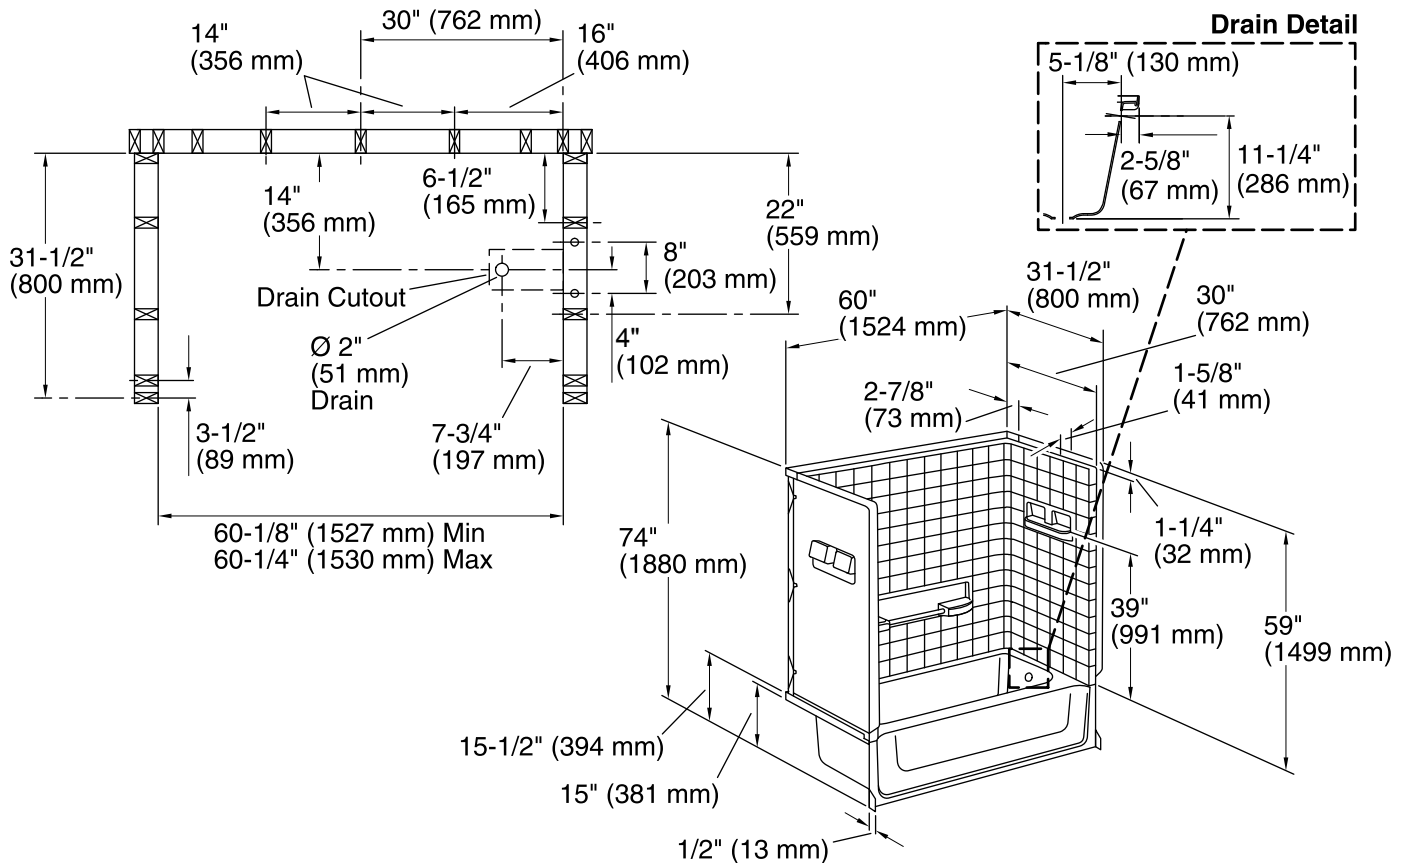

Technical Information

All product dimensions are nominal.

Installation:	3-Wall Alcove
Drain location:	Right
Basin area, bottom:	48" x 21" (1219 mm x 533 mm)
Basin area, top:	55" x 23" (1397 mm x 584 mm)
Water depth:	9-3/8" (238 mm)
Water capacity:	35 gal (132.5 L)
Door height required:	57-3/4" (1467 mm)
Door width required:	57-1/2" (1461 mm)

Notes

Measure your actual product for roughing-in details.

Install this product according to the installation guide.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown.