

## **OC-SS-39**

# 39" Shower with Seat and Grab Bars 62050115





#### **Features**

- Modular design allows it to be moved around corners and through doorways with ease.
- Durable swirl gloss finish.
- Includes folding transfer seat with stainless steel support.
- Includes factory installed stainless steel grab bars.
- 1/2" (13 mm) threshold with 1/2" (13 mm) finished floor.
- 39-3/8" (1000 mm) x 39-3/8" (1000 mm) x 72" (1829 mm) complete unit finished dimensions.

#### Material

Compression molded from our exclusive Vikrell® material.

### Installation

- Tongue-and-groove four piece modular design allows for easy snap together installation.
- Caulk required for proper installation.

### Components

Product includes:

62055115 39" Shower End Wall Set with Seat and Grab Bar 62051100 39" Shower Base 62052113 39" Shower Back Wall with Grab Bar



### Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold HUD, UM Bulletin 73

## STERLING® Warranty - Fixtures Made of Solid Vikrell Material

See website for detailed warranty information.

### **Available Color/Finishes**


Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit

A KOHLER COMPANY

## **OC-SS-39**

# 39" Shower with Seat and Grab Bars 62050115

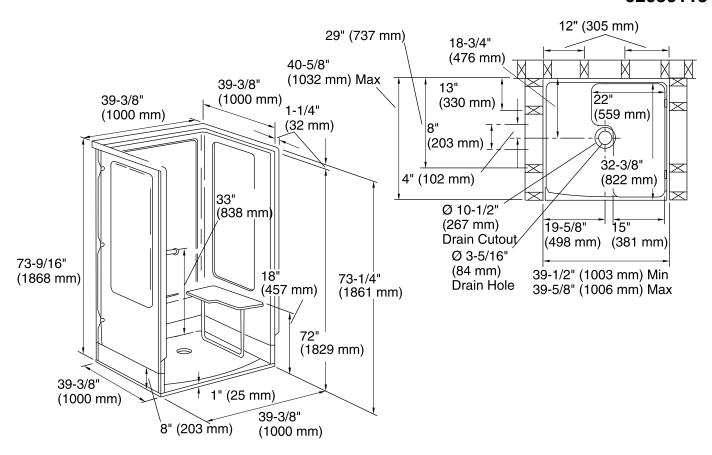

### **Technical Information**

All product dimensions are nominal.

Installation:

3-Wall Alcove

Drain location: Center

#### **Notes**

Install this product according to the installation guide.

Drain cutout in subfloor to be 10-1/2" (267 mm) per rough-in illustration as shown to allow the backside of the drain to sit below the subflow surface.

Studs should be positioned as shown.

Backer boards and fasteners protrude beyond the back wall 1-1/2" (38 mm). If installing this product against wall board, 1-1/2" (38 mm) furring strips installed over the wall board are recommended. The stud pocket depth of 40-5/8" (1032 mm) will need to be increased by the combined thickness of the wall board and furring strips.