STERLING.

Features


- Compression molded from our exclusive solid Vikrell_® material
- Above-floor-drain (AFD) rough-in
- Durable high-gloss finish
- 10-year consumer/3-year commercial limited warranty
- 2" (5.1 cm) wainscot/tile ledge
- 20" (50.8 cm) bath depth (floor to top of threshold)
- 60-1/4" (153 cm) x 32-1/8" (81.6 cm) x 23" (58.4 cm) rough-in dimensions include nailing flange
- 60" (152.4 cm) x 32" (81.3 cm) x 22" (55.9 cm) finished dimensions

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASTM E162
- ASTM E662
- CSA B45





Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Model Description		Colors/Finishes	
71121112 32" (81.3 cm) AFD bath, left drain		0 🗆	Other	
71121122	32" (81.3 cm) AFD bath, right drain	0	Other	

ENSEMBLETM


Technical Information

Fixture*:					
Basin area:	Basin area:				
Bathing well		42" (106.7 cm) x 20" (50.8 cm)			
Top area		54" (137.2 cm) x 26" (66 cm)			
To overflow:	To overflow:				
Water depth	1	13″ (33 cm)			
Capacity		51 gal (193 L)			
* Approxima	ite m	easurements for co	omparison only.		
Model	doc wid	or maximum th	door maximum height		
		11/16″ 6.5 cm)*	*NA		
* Varies with	* Varies with alternative walls.				

Installation Notes

Install this product according to the installation guide. Size the drain hole clearance to fit the drain assembly that will be used.

Studs should be positioned roughly as shown.

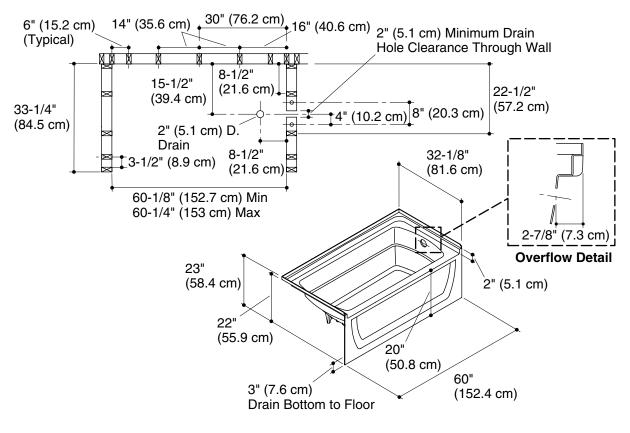

Product Diagram



