STERLING.

Features

- Bath and integral apron eliminates installation step
- Compression molded from our exclusive solid $\textsc{Vikrell}_{\ensuremath{\mathbb{R}}}$ material
- Modular 4-piece design
- Lightly pebbled bottom surface for sure footing
- Tongue-and-groove 4-piece modular design allows for easy "snap together" installation
- Durable high-gloss finish
- 10-year consumer/3-year commercial limited warranty
- Gentle sloping back, neck, and armrest in bath design
- Wall surround allows for attachment of grab bars
- Available with above-the-floor drain
- 60-1/4" (153 cm) x 37-1/2" (95.3 cm) x 73-1/4" (186.1 cm) complete unit rough-in dimensions
- 60" (152.4 cm) x 36" (91.4 cm) x 72" (182.9 cm) complete unit finished dimensions


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASTM E162
- ASTM E662
- CSA B45

Specified Model

36″ (91.4 cm) OVAL BATH/SHOWER SYSTEM WITH BACKER BOARDS **71100116**



Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Model	Complete Unit Description	Colors/Finishes	
71100116	Oval bath/shower system and wall surround with backer boards, left drain		Other
71100118	Oval bath/shower system and wall surround with backer boards, above-the-floor left drain	0 🗆	Other
71100126	Oval bath/shower system and wall surround with backer boards, right drain		Other
71100128	Oval bath/shower system and wall surround with backer boards, above-the-floor right drain	0 🗆	Other
Model	Wall Component Description	Colors/Finishes	
71104106	Complete wall set with backer boards	0 🗆	□ Other

ENSEMBLETM

Technical Information

Fixture*:					
Basin area:					
Bathing well, bottom	40" (101.6 cm) x 21" (53.3 cm)				
Bathing well, top	52" (132.1 cm) x 29" (73.7 cm)				
To overflow:					
Water depth	11″ (27.9 cm)				
Capacity	40 gal (151.4 L)				
* Approximate measurements for comparison only.					
Model	door maximum width	door maximum height			
71100116 71100118 71100126 71100128	58-1/2″ (148.5 cm)	56-1/2″ (142.2 cm)			

Installation Notes

Install this product according to the installation guide. Size the drain cutout to fit the drain assembly that will be used.


Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown.

Attach grab bars at the specified backer board locations only.

STERLING

KOHI FR. COM

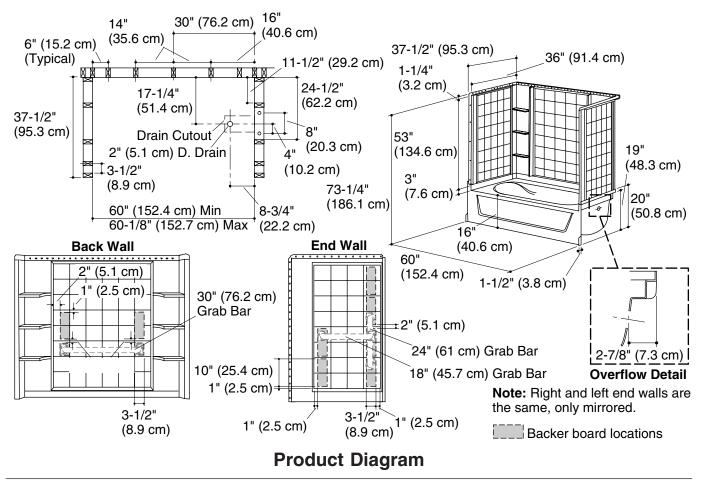

ENSEMBLE™ 36" (91.4 cm) OVAL BATH/SHOWER SYSTEM WITH BACKER BOARDS Page 2 of 2 1065810-4-**C**