

A **KOHLER**, COMPANY

FINESSETM QUICK-INSTALLTM

Features

- CleanCoat™ glass coating
- Heavy-duty, anodized aluminum-framed glass doors
- Quick Install™ compression fit technology eliminates track cutting and tile drilling
- Radiused side jambs for curved bathing fixture corners (reverses for 90° tile corners)
- Pre-installed roller mechanisms for easier installation
- 1-1/2" (3.8 cm) width adjustability for out-of-plumb conditions
- Stainless steel hardware prevents rusting or corrosion
- Frameless sliding glass door panels reduce overlap
- Installs within minutes
- 1/4" (6 mm) thick tempered glass
- No tools needed except for hex wrench (included)
- · Rollers with brass inserts for smooth, silent operation

FRAMELESS BY-PASS BATH/SHOWER DOORS 5305EZ Series





Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z97.1 (tempered glass)
- 16 CFR Part 1201

Colors/Finishes

Refer to Price Book for current frame finish and glass options


Specified Model

Model	A (Max Width) (Min less 1-1/2" (3.8 cm)*	B (Height)*	C (Walk Through Max)*
5305EZ-59**	59-1/4" (150.5 cm)	58-3/4" (149.2 cm)	26" (66 cm)
5325EZ-57**	57-1/2" (146.1 cm)	55-3/4" (141.6 cm)	25" (63.5 cm)
5325EZ-59**	59-1/4" (150.5 cm)	55-3/4" (141.6 cm)	26" (66 cm)
5365EZ-45**	45-1/2" (115.6 cm)	65-1/2" (166.4 cm)	19-1/2" (49.5 cm)
5375EZ-47**	47-1/4" (120 cm)	70-5/16" (178.6 cm)	20" (50.8 cm)
5375EZ-57**	57-1/2" (146.1 cm)	70-5/16" (178.6 cm)	25" (63.5 cm)

^{*} Note: Consult the diagram on the next page for the location of the measurements.

^{**} Note: Add appropriate frame color/finish code to the end of the unit model # when ordering.

FINESSETM QUICK-INSTALLTM

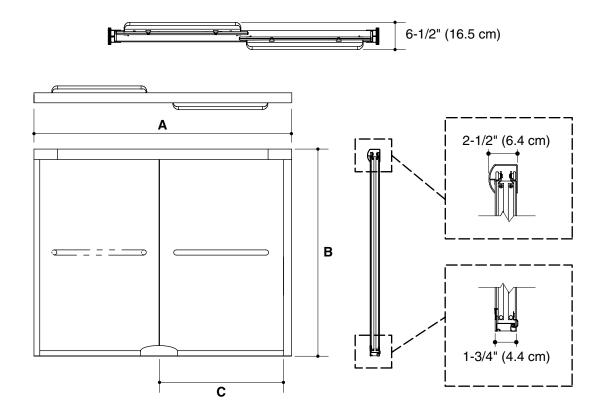

Product Diagram