

Features

- Featuring ComforTrack™ Technology – a cushioned bottom track – allows for easier access to the bathing/showering space
- ComforTrack™ enables you to sit, lean or kneel on the bottom track of the door to easily bathe children or clean the showering/bathing space
- 3/16" thick glass available in Clear, Pebbled, Frosted, and Templar

Installation


- Out-of-plumb adjustability allows for easy installation

Material

- Anodized aluminum hardware prevents rusting or Corrosion
- Tempered glass ensures maximum safety and durability

Components

Additional included component/s: Hardware Kit

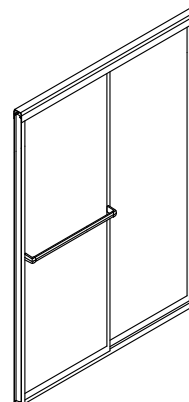

For complete listing of available colors, go to sterlingplumbing.com.

Codes/Standards


ANSI Z97.1 (Tempered Glass)

CPSC 16CFR 1201 Cat II

See website for detailed warranty information.


Product Specification

Shower door shall be 48-7/8" (1241 mm) in width and 70-1/8" (1781 mm) in height. Shower door shall be made of anodized aluminum. Shower door shall feature tempered glass. Shower door shall feature ComforTrack™ Technology - a cushioned bottom track. Shower door shall be shower installation. Shower door shall be STERLING Model 572075-48.

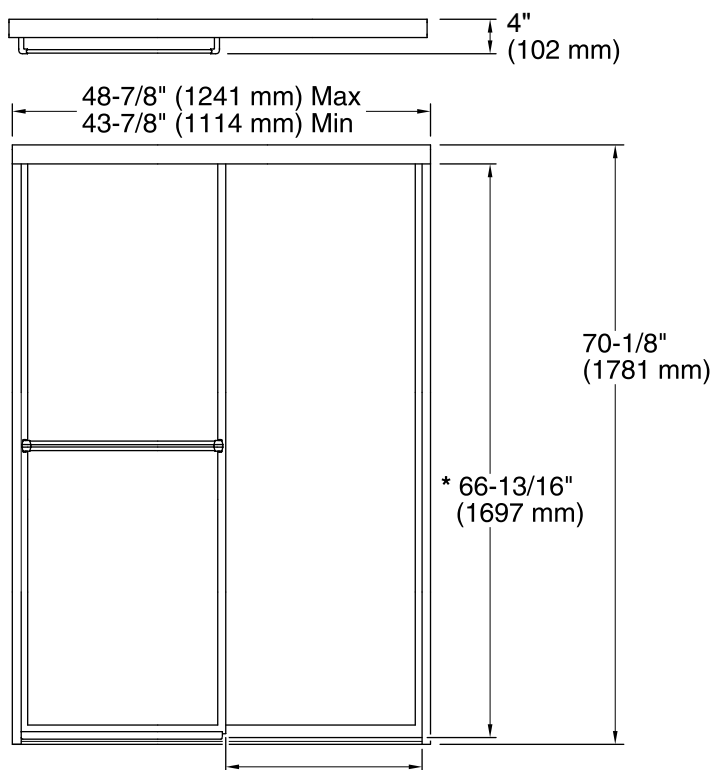

* Walk-Through

* 22-15/16" (583 mm) Max
* 20-7/16" (519 mm) Min

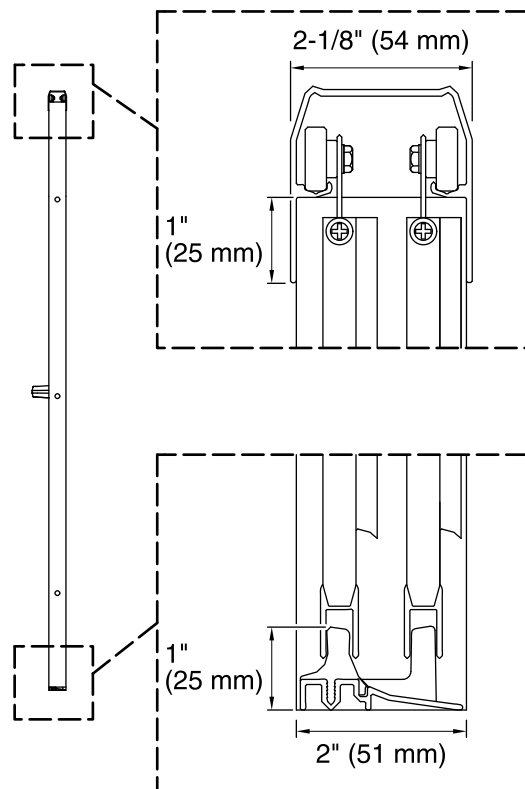

Technical Information

All measurements are nominal.

Frame material: Aluminum,

Opening style: Sliding/Bypass

Walk-through - min: 20-7/16" (519 mm)

Walk-through - max: 22-15/16" (583 mm)

Glass thickness: 3/16" (5 mm)

Installation Notes

Install this product according to the installation guide.