




Swanstone Wainscoting Panels

Manufactured from Swanstone Solid Surface

Recommended for high-use traffic areas and commercial surfaces.

FEATURES

- Swanstone protective wall coverings are perfect for commercial spaces and high-traffic, high-pressure areas like shipping rooms, hallways and elevator interiors.
- Reinforced solid surface means color and texture run all the way through and cannot wear away.
- Resistant to cracks, gouges and dings.
- Durable and easy to clean.
- Renewable surface which can be repaired if necessary.
- Compression molding means superior durability.
- Warranty: Limited Lifetime – Residential
Limited 30-year – Commercial

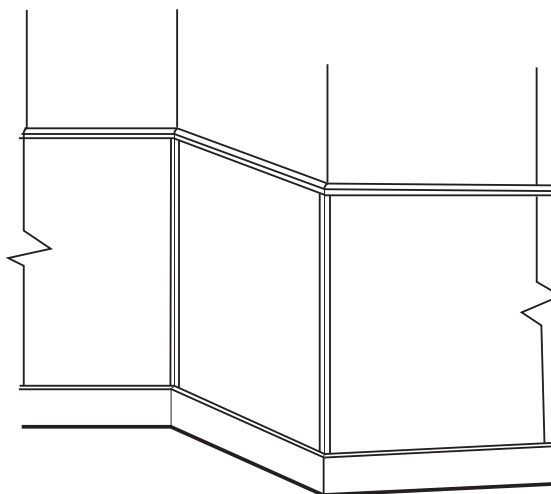

Wainscoting Panels

SPECIFICATIONS

Model	Part	Description	Carton Dims. In.
SS-3696SK	SS03696SK	36" H x 96" W Skidded Panels	-
SS-4896SK	SS04896SK	48" H x 96" W Skidded Panels	-
SS-30145SK	SS30145SK	30" H x 145" W Skidded Panels	-
DWP-9636WB-1	DP09636WB01	36" H x 96" W Wainscot Beadboard	98 x 38 x 4

NOTE: Solid colors are not recommended due to increased maintenance.

COLORS

Solid Colors:

- White (010)
- Bisque (018)
- Bone (037)

Aggregate Colors:

- Arctic Granite (035)
- Baby's Breath (168)
- Barley (091)
- Bermuda Sand (040)
- Canyon (124)
- Cloud Bone (126)
- Cloud White (125)
- Glacier (121)
- Golden Steppe (128)
- Gray Granite (042)
- Ice (130)
- Mountain Haze (129)
- Night Sky (012)
- Pebble (072)
- Prairie (122)
- Tahiti Desert (050)
- Tahiti Gray (053)
- Tahiti Ivory (059)
- Tahiti Matrix (058)
- Tahiti Sand (051)
- Tahiti White (011)
- Tundra (131)

STANDARDS AND RATINGS

American Society of Testing and Materials (ASTM) E-84: Class A Flame Spread Rating

American National Standard Institute—ANSI Z124.6

International Association of Plumbing and Mechanical Officials (IAPMO)—Listed

cUPC listed—Certified to CSA Test Standard B45.5 by IAPMO

Uniform Plumbing Code (UPC)

For a complete list of tests and results see the Technical Data Sheet.

MAINTENANCE AND CLEANING INFORMATION

Clean regularly with common household liquid cleaners and rinse within five minutes of application. Occasional scrubbing with abrasive cleaners ensures that the original luster will be maintained. **Do not** use "leave on" cleaning products, such as automatic spray shower cleaners. Prolonged contact with harsh chemicals could have an adverse reaction over time and discolor surfaces.

Do not use cleaning agents that caution use on acrylic, polyester or plastics.

SUPPORT DOCUMENTS

Installation instructions available at swanstone.com.

