

# Swanstone Square Tile Bath Wall

## Single Panel




### Manufactured from Swanstone Solid Surface

*Recommended for high-use traffic areas and commercial surfaces.*

### FEATURES

- Chamfered-edges on the 12-inch square tile pattern provide the high-end look of travertine.
- No grout to maintain; will not mold or mildew.
- Color and texture run all the way through and cannot wear away.
- Ideal for remodeling, panels glue up over existing surface.
- Coordinates with other Swanstone bath products.
- Can be easily trimmed to fit any shower application.
- Widest range of sizes to fit most any project.
- Heat resistant—walls can handle steamer units.
- Compression molding means superior durability.
- Warranty: Limited Lifetime – Residential  
Limited 30-year – Commercial

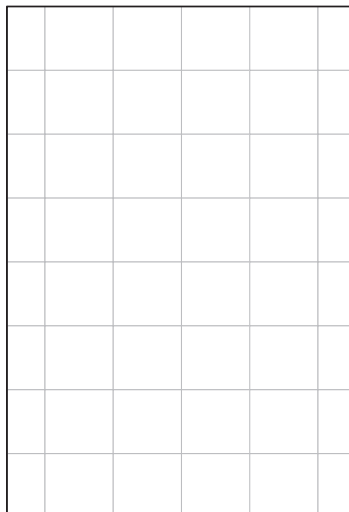

### Single Panel Shower Walls

36" wide x 96" high (914 mm x 2438 mm)

62" wide x 96" high (1575 mm x 2438 mm)

### SPECIFICATIONS

Model	Part	Nominal Dimensions	Ship Wt. Lb.	Carton Dims. In.	Cu. Ft.
SSSQ-3696-1	SSSQ369601	36" W x 96" H	96	42 x 4 x 102	10
SSSQ-6296-1	SSSQ629601	62" W x 96" H	108	68 x 4 x 102	16.06

**Kit Includes:** One flat wall panel. It may be necessary to combine cartons to accommodate desired installation area. No installation materials provided. Order one SS-72 installation kit per SSSQ-3696 panel; the SSSQ-6296 requires two installation kits per panel.

**Packaging:** Each kit is packed in an individual carton.

### COLORS

#### Solid Colors:

- White (010)
- Bisque (018)
- Bone (037)

#### Aggregate Colors:

- Bermuda Sand (040)
- Black Galaxy (015)
- Carrara (221)
- Concrete Ash Gray (203)
- Concrete Birch (226)
- Concrete Charcoal Gray (209)
- Concrete Clay (212)
- Concrete Limestone (218)
- Concrete Sandstone (215)
- Ice (130)
- Tahiti White (011)

### ACCESSORIES

See page 56 for complete listing of all wall accessories.

### STANDARDS AND RATINGS

American Society of Testing and Materials (ASTM) E-84: Class A Flame Spread Rating

American National Standard Institute—ANSI Z124.6

International Association of Plumbing and Mechanical Officials (IAPMO)—Listed

cUPC listed—Certified to CSA Test Standard B45.5 by IAPMO

Uniform Plumbing Code (UPC)

For a complete list of tests and results see the Technical Data Sheet.

### MAINTENANCE AND CLEANING INFORMATION

Clean regularly with common household liquid cleaners and rinse within five minutes of application. Occasional scrubbing with abrasive cleaners ensures that the original luster will be maintained. **Do not** use "leave on" cleaning products, such as automatic spray shower cleaners. Prolonged contact with harsh chemicals could have an adverse reaction over time and discolor surfaces.

**Do not** use cleaning agents that caution use on acrylic, polyester or plastics.

### SUPPORT DOCUMENTS

Installation instructions available at [swanstone.com](http://swanstone.com).

