

# TSMK96-3262

## Swanstone Traditional Subway Tile Bath Wall Kit




### Manufactured from Swanstone Solid Surface

Recommended for high-use traffic areas and commercial surfaces.

### FEATURES

- Traditional 12 x 24-inch subway tile pattern with textured grout lines provides your bathroom with beautiful style.
- No grout to maintain; will not mold or mildew.
- Color and texture run all the way through and cannot wear away.
- Ideal for remodeling; easier to install than tile—panels glue up over existing surface.
- Coordinates with other Swanstone bath products.
- Heat resistant—walls can handle steamer units.
- Compression molding means superior durability.
- Warranty: Limited Lifetime - Residential  
Limited 30-year - Commercial

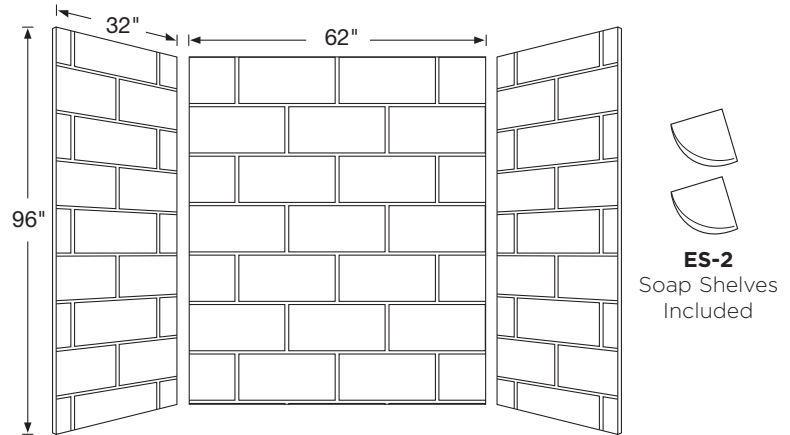

Designed to fit base areas  
32" deep or smaller x 62" wide x 96" high or smaller  
(813 mm x 1575 mm x 2438 mm)

### SPECIFICATIONS

| Model       | Part       | Ship Wt. Lb. | Carton Dims. In. | Cu. Ft. |
|-------------|------------|--------------|------------------|---------|
| TSMK96-3262 | TSMK963262 | 294          | 102 x 68 x 4     | 16.1    |

**Kit Includes:** Two side panels, one back panel, two corner soap shelves.

**Packaging:** Each kit is packed in an individual carton.

### COLORS

#### Solid Colors:

- White (010)
- Bisque (018)
- Bone (037)

#### Aggregate Colors:

- Bermuda Sand (040)
- Black Galaxy (015)
- Carrara (221)
- Concrete Ash Gray (203)
- Concrete Birch (226)
- Concrete Charcoal Gray (209)
- Concrete Clay (212)
- Concrete Limestone (218)
- Concrete Sandstone (215)
- Ice (130)
- Tahiti White (011)

### ACCESSORIES

See page 56 for complete listing of all wall accessories.

### STANDARDS AND RATINGS

American Society of Testing and Materials (ASTM) E-84: Class A Flame Spread Rating

American National Standard Institute—ANSI Z124.6

International Association of Plumbing and Mechanical Officials (IAPMO)—Listed

cUPC listed—Certified to CSA Test Standard B45.5 by IAPMO

Uniform Plumbing Code (UPC)

For a complete list of tests and results see the Technical Data Sheet.

### MAINTENANCE AND CLEANING INFORMATION

Clean regularly with common household liquid cleaners and rinse within five minutes of application. Occasional scrubbing with abrasive cleaners ensures that the original luster will be maintained. **Do not** use “leave on” cleaning products, such as automatic spray shower cleaners. Prolonged contact with harsh chemicals could have an adverse reaction over time and discolor surfaces. **Do not** use cleaning agents that caution use on acrylic, polyester or plastics.

### SUPPORT DOCUMENTS

Installation instructions available at [swanstone.com](http://swanstone.com).