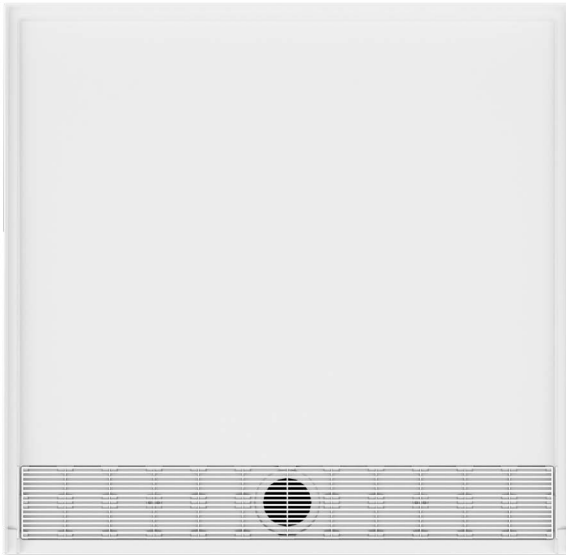


Transfer Trench Drain Shower Pan

FTF-3838**PROFESSIONAL****FEATURES**


- Compression-molded solid surface with glass reinforcement technology.
- $\frac{3}{4}$ " low threshold entry.
- Patented wall-to-wall trench system with attractive 304 stainless grate.
- No need to recess slab which provides a cost-saving, easy installation.
- Reinforced composite material will not mold or mildew, no grout to clean.
- Engineered for strength with molded-in structure supports.
- Slip-resistant, textured bottom surface.
- Warranty: Limited Lifetime - Residential
Limited 5-year - Commercial

STANDARDS AND RATINGS

- American National Standard Institute—ANSI Z124.3
- International Association of Plumbing and Mechanical Officials (IAPMO)—Listed
- cUPC listed—Certified to CSA Test Standard
- B45.5 by IAPMO
- Uniform Plumbing Code (UPC)



FTF-3838

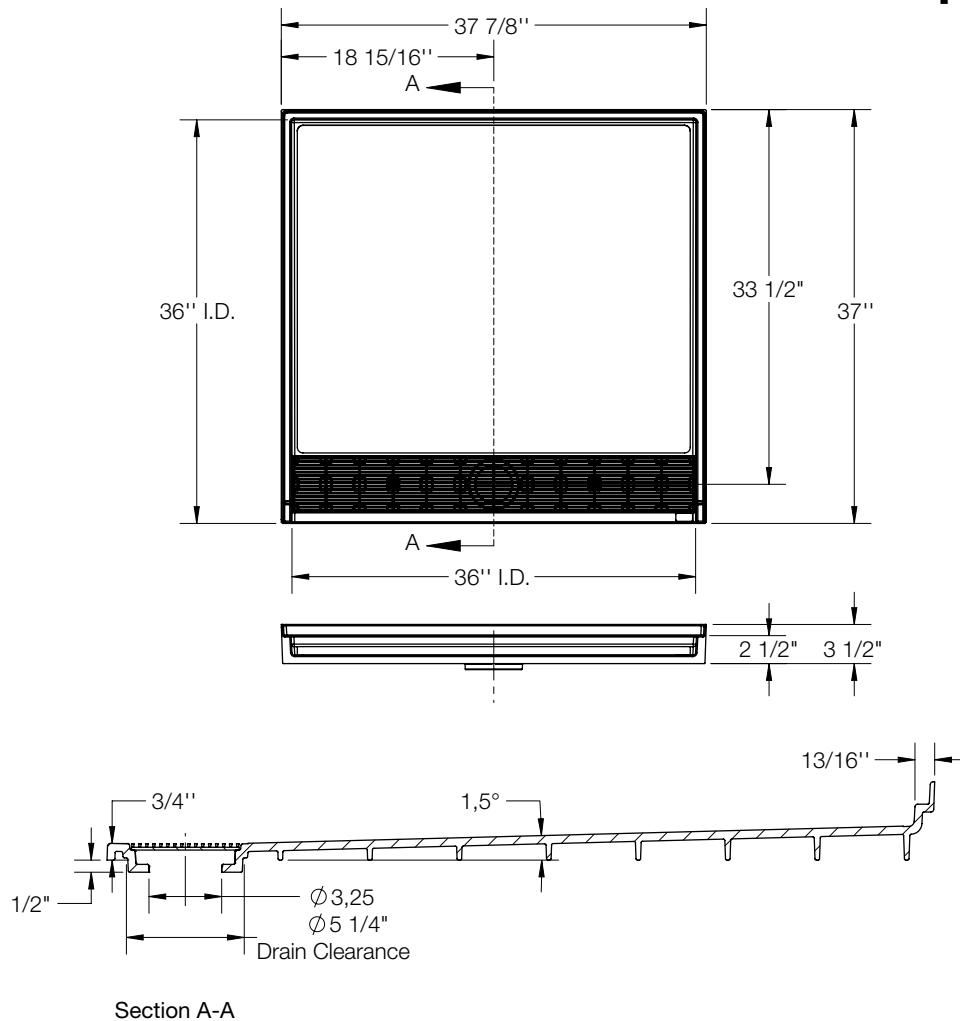

IMPORTANT: Rough-in dimensions are provided for reference only. You must measure the actual shower pan and check local building code requirements before construction of the stud wall.

DIMENSIONS Dimensional Tolerance $\pm \frac{3}{16}$ ". Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.

Model #	Part #	Nominal Size	Rough-In Dimensions				Shipping Weight	Carton Dimensions	Cubic Feet
			Width	Depth	Drain center to side wall	Drain center to back wall			
FTF-3838	FT03838	38 x 38	37 1/4"	37 3/16"	18 1/8"	33 11/16"	50	45 x 43 x 10	12