



# CT708U(G)X

## Commercial Flushometer Top Spud Wall-Hung Toilet – 1.0/1.28 GPF

### FEATURES

- Wall-mounted
- Elongated front bowl
- Optional CEFIONTECT® glaze prevents debris from sticking to ceramic surfaces, making them easier to clean
- Clear glazed trapway coating
- Designed for reclaimed water use

### MODELS

- CT708UX  
Commercial wall-mounted toilet with 1-1/2" top spud inlet, less seat
- CT708UGX  
Commercial wall-mounted toilet with 1-1/2" top spud inlet, less seat with CEFIONTECT ceramic glaze

### ADDITIONAL ITEMS

- SC534 seat
- SC134 seat
- THU111 Retro-fit mounting bolt cap set (4 pcs)

EcoPower® Flush Valves	
Exposed	
TET1UAX32#CP	1.0 GPF
TET1LAX32#CP	1.28 GPF



### COLORS/FINISHES

- Standard  
#01 Cotton

### PRODUCT SPECIFICATION

The wall-mounted, low consumption siphon jet flushing toilet shall be 1.0 or 1.28 GPF (3.8 or 4.8 LPF) when paired with a flush valve of corresponding flush volume. Toilet shall have optional CEFIONTECT ceramic glaze. Toilet can be mounted at ADA height. Toilet shall be TOTO Model CT708U(G)X\_\_\_\_\_.

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant



# CT708U(G)X

## Commercial Flushometer Top Spud Wall-Hung Toilet – 1.0/1.28 GPF

### SPECIFICATIONS

<b>Water Use</b>	1.0/1.28 GPF (3.8/4.8 LPF)
<b>Flush System</b>	Siphon Jet Flushing Action
<b>Water Surface</b>	12" x 9-1/4"
<b>Water Pressure</b>	Min: 35 psi (Flowing) Max: 80 psi (Static)
<b>Min. Flow Rate</b>	24 GPM
<b>Trap Diameter</b>	2-1/8"
<b>Trap Seal</b>	2-5/8"
<b>Material</b>	Vitreous China
<b>Warranty</b>	One Year Limited Warranty
<b>Shipping Weight</b>	56 lbs
<b>Shipping Dimensions</b>	26-1/4" L x 15-5/8" W x 16" H


### INSTALLATION NOTES

RECLAIMED WATER QUALITY PARAMETERS	
<b>Chloride Ion Concentration</b>	< 600mg/L
<b>pH</b>	5.8~8.6
<b>Free Carbonate</b>	< 50mg/L
<b>Langelier's Index</b>	> -3.00
<b>Nitrate Ion Concentration</b>	< 60mg/L
<b>Conductivity</b>	< 250mS/m
<b>Sulfate Ion Concentration</b>	< 100mg/L
<b>Residual Chlorine Concentration</b>	< 2mg/L
<b>Hydrogen Sulfide Gas</b>	None Existence
<b>Suspended Solids</b>	< 5mg/L

Spuds are unique for TOTO product. For replacement spuds, contact TOTO for part number THU073RX.

TOTO Reclaimed Water flush valves are designed to perform best when used with TOTO Reclaimed Water urinals/toilets and components. Although TOTO Reclaimed Water products may be used in combination with other reclaimed water product brands, optimal performance might be impaired and attempted use with any non-compliant reclaimed water product(s) could result in corrosion, leakage or void the warranty.

### DIMENSIONS

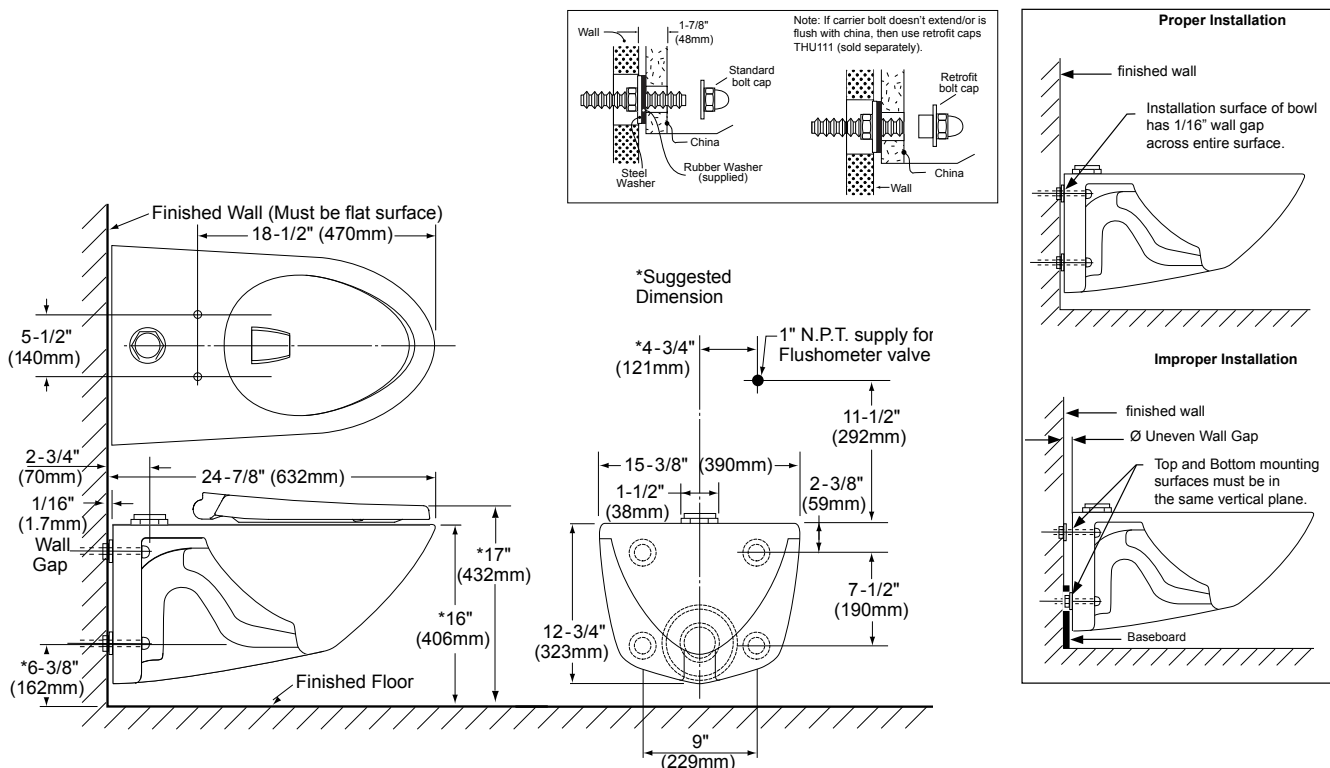

**TOTO®**

These dimensions and specifications are subject to change without notice