

# TOTO®

Perfection by Design


## CST794SF Nexus™ Two Piece Toilet, 1.6 GPF




CST794SF - Nexus™ Toilet  
SS204 - Oval SoftClose® Seat



**G-Max™ Technology:** Quiet, powerful, commercial grade flushing performance.



Choose a SoftClose® toilet seat, or upgrade to a Washlet™.

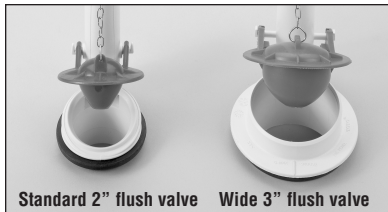

**Fast Flush:** New, wide 3" flush valve is 125% larger than conventional 2" flush valves.

- Unique sculpted design, skirted two piece toilet
- Universal Height 16-1/8" rim height
- Skirted styling with concealed trapway for easy cleaning
- G-Max™ Technology
- Powerful, quiet flush every time
- Large water surface
- Designer Suite:  
Matching Nexus™ pedestal and vessel lavatories

Decorative, ADA compliant, high profile two piece toilet. Low consumption (6 Lpf/1.6 Gpf) siphon jet flushing action.

Tank cover, fittings, chrome plated trip lever, less seat.

■ **CST794SF**

Elongated, 12" rough-in, less seat

□ **C794SF**

Elongated bowl only, 12" rough-in.

□ **ST794S**

Nexus™ tank and cover only. Complete with tank trim and coupling components.

□ **SS204**

SoftClose Oval®: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

*Colors:*

*Standard* #01 Cotton

*Optional* See price book for additional colors

*Trip Lever:*

*Standard* #CP Chrome Plated

*Optional* See price book for additional finishes



# CST794SF

## Nexus™ Two Piece Toilet, 1.6 GPF

### ■ PERFORMANCE

The TOTO G-Max low consumption toilets received high ratings during ANSI/ASME and CSA testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway.

### ■ SPECIFICATIONS

Water Use: 1.6 Gpf / 6.0 Lpf  
 Flush System: Gravity Feed (G-Max System)  
 Min. Water Pressure: 8 psi  
 Water Surface: 10-1/4" x 8-1/4"  
 Trap Diameter: 2-1/16"  
 Rough-in: 12" rough-in  
 Trapseal: 2-1/4"  
 Warranty: Five Year Limited Warranty  
 Material: Vitreous china

Shipping Weight: **C794SF** 81.5 lbs.  
**ST794S** 33.5 lbs.

Shipping Dimensions: **C794SF** 29-3/4"L x 16-1/2"W  
 x 24-3/4"H  
**ST794S** 20-3/8"L x 8-3/8"W  
 x 19-5/8"H

*Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.*


*Listing and approval: IAPMO/UPC, CSA, City of Los Angeles, State of MA, and others*



*Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor.*

*Recommended seat: SS304*

*These dimensions and specifications are subject to change without notice.*

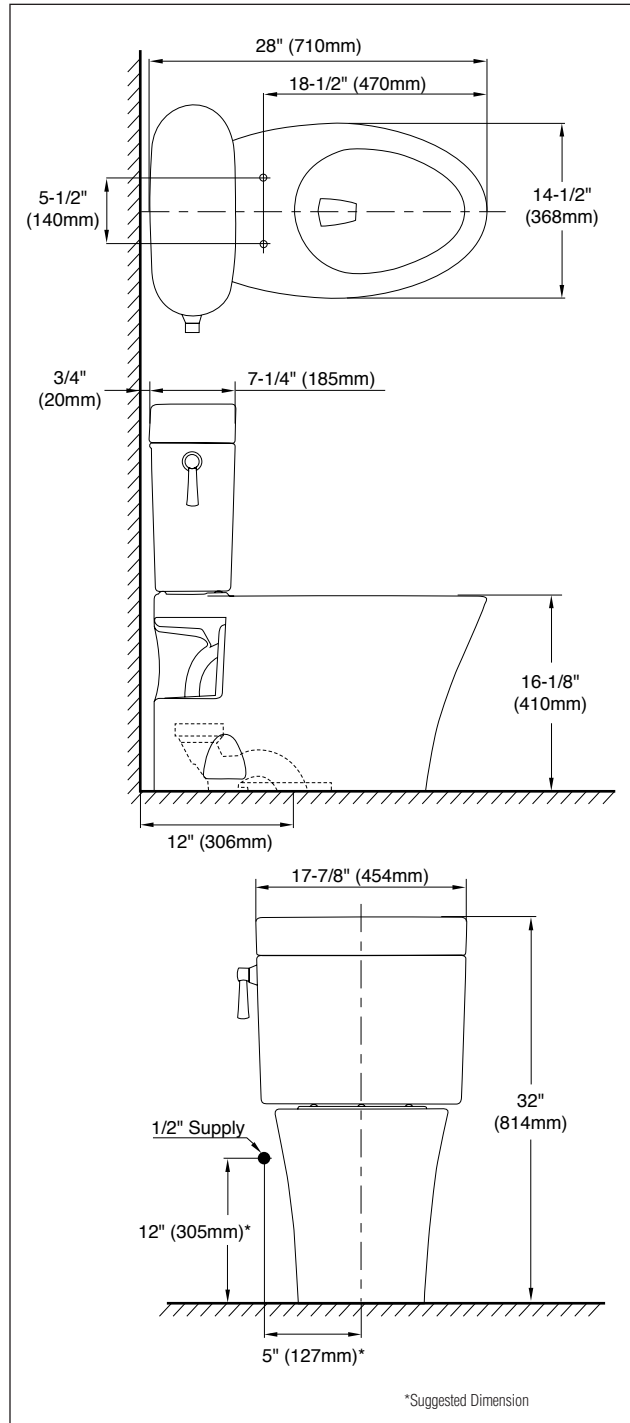

**CST794SF - Nexus™ Toilet**