

TOTO®

MS854114SL

UltraMax® One-Piece Toilet, ADA Height, 1.28GPF

FEATURES

- G-Max® flushing system, low consumption (1.6GPF/6.0LPF)
- One-piece decorative toilet with high-profile tank
- Elongated front bowl with SoftClose® seat (SS114)
- 12" Rough-in
- ADA compliant (when installed with trip lever located on the approach side)
- Chrome trip lever

MODELS

- MS854114SL
ADA height toilet with elongated bowl and SoftClose seat (SS114)

COLORS/FINISHES

- Standard
 - #01 Cotton
 - #03 Bone
 - #11 Colonial White
 - #12 Sedona Beige

PRODUCT SPECIFICATION

The one-piece low consumption G-Max flushing system toilet shall be 1.6GPF/6.0LPF. Toilet shall be of elongated front bowl with a high-profile tank and SoftClose seat. Toilet shall be ADA compliant (when installed with trip lever located on the approach side). Toilet shall have chrome trip lever. Toilet shall be TOTO Model MS854114SL_____.



G-MAX
FLUSHING SYSTEM BY TOTO®

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1,
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant (when installed with trip lever located on the approach side)



MS854114SL

UltraMax® One-Piece Toilet, ADA Height, 1.28GPF




SPECIFICATIONS

- Water Use 1.6 GPF/6.0 LPF
- Flush System G-Max®
- Min. Water Pressure 8 psi (static)
- Water Surface 10-5/16" x 8-1/4"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-3/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight 99 lbs.

- Shipping Dimensions 32" L x 20" W x 17-3/4" H1 x 28-3/4" H2

INSTALLATION NOTES

Back-to-Back Toilet Installations:
 TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

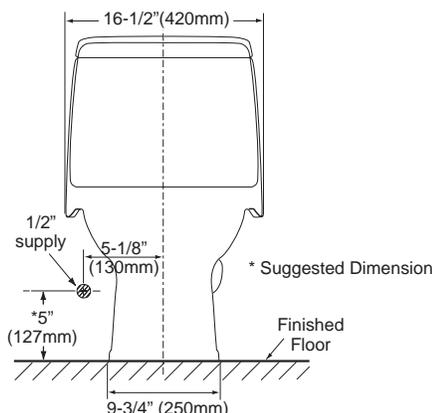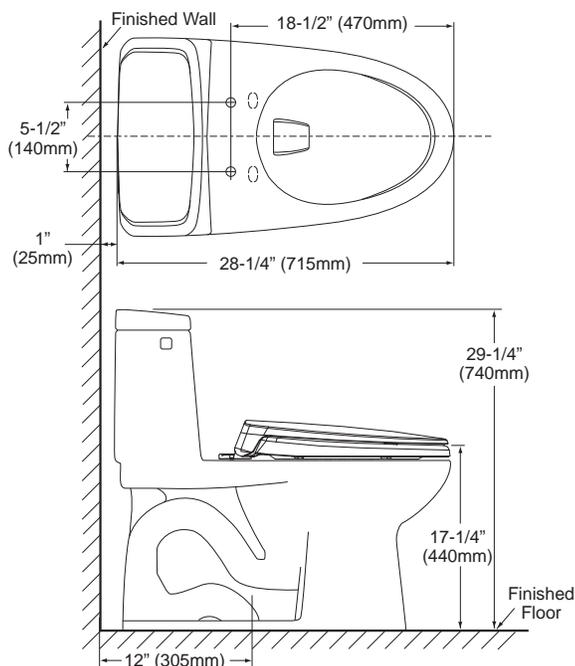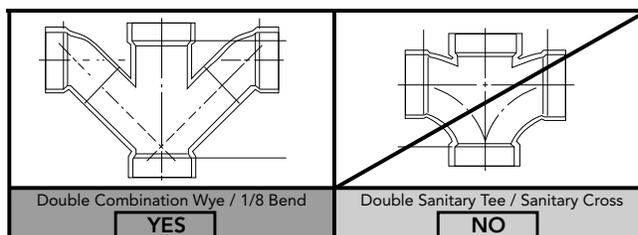

These dimensions and specifications are subject to change without notice