

CST416M Aquia® II Dual Flush Toilet, 1.6 GPF / 0.9 GPF



CST416M - Aquia® II Toilet SS204 - SoftClose® Oval Seat



Dual-Max Technology: Optional 1.6 Gpf / 6 Lpf or 0.9 Gpf / 3.4 Lpf



Choose a SoftClose® toilet seat, or upgrade to a Washlet®.



Elongated skirted design, two piece toilet

- Dual-Max Flushing System
- Push button style flush option
- Excellent rim wash
- Large, 2-1/8" fully glazed trapway

Decorative, high profile two piece toilet. Dual Flush (1.6 Gpf / 6 Lpf & 0.9 Gpf / 3.4 Lpf) performance option to allow appropriate water usage.

Tank cover, fittings, chrome plated push button, less seat.

CST416M

Elongated toilet bowl & tank, 12" rough-in, less seat. Regular height.

Aquia II Elongated bowl only, 12" rough-in.

ST416M

Aquia II tank and cover only. Complete with tank trim and coupling components.

□ SS204

SoftClose® Seat: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

□ SS114

SoftClose Seat: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

SC134

Elongated, open front seat with lid.

□ SC534

Elongated, open front seat less lid.

Colors: Standard Optional

Flush Button: Chrome Plated Standard



#01 Cotton See price book for additional colors

Augusta Residential Line

PERFORMANCE

TOTO[®] Dual-Max[®] toilets received high ratings during ANSI/ASME and CSA testing. Designed to offer optional 1.6 Gpf or 0.9 Gpf to meet the demands for water savings in growing population centers.

SPECIFICATIONS

Water Use:	1.6 Gpf / 6.0 Lpf
	0.9 Gpf / 3.4 Lpf
Flush System:	Gravity Feed
	(Dual-Max System)
Min. Water Pressure:	8 psi
Water Surface:	4-1/2" x 6"
Trap Diameter:	2-1/8"
Rough-in:	12" rough-in
Acoustic Reading:	65-70dB (may vary depending
	on room construction)
Warranty:	One Year Limited Warranty
Material:	Vitreous china

Shipping Weight: C

CT416 75 lbs. **ST416M** 30 lbs.


Shipping Dimensions: **CT416** 27-3/4"L x 15-1/2"W1 x 10-1/2"W2 x 18"H **ST416M** 16"L x 7-1/2"W x 18-1/2"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M, A112.19.14 and CAN/CSA B 45 requirements.

Listing and approval: IAPMO/c-UPC, and other jurisdictions.

Meets and exceeds ASME A112.19.2 standards for drainline carry distance with a 2% grade and 4" I.D. pipe. WaterSense compliant.

These dimensions and specifications are subject to change without notice.

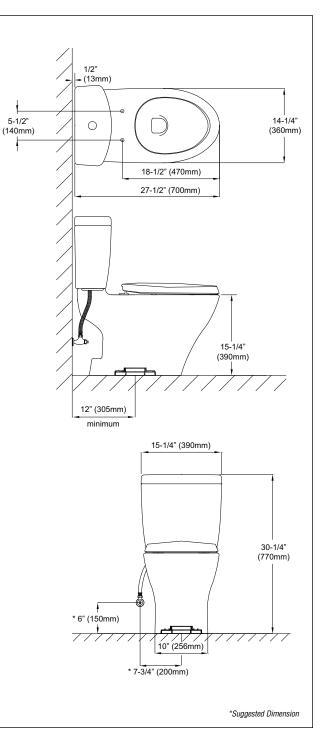

CST416M - Aquia II® Toilet



TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260 Tel. (888) 295-8134 • Fax. (770) 282-8701 • www.totousa.com Printed in U.S.A. © TOTO[®] LTD. 12/07 #A10440