

# TOTO®

## MS934214EF Eco Lloyd® One Piece Toilet, 1.28 GPF



MS934214EF - Eco Lloyd® Toilet



**E-Max® Technology:** Quiet, powerful, commercial grade flushing performance.



**UniFit Rough-in:** Easy to install 10", 12" and 14" rough-in's available.



Standard 2" flush valve    Wide 3" flush valve

**Fast Flush:** New, wide 3" flush valve is 125% larger than conventional 2" flush valves.



Certified by IAPMO R&T

- Geometric transitional design
- E-Max® flushing system
- Decorative one-piece with skirted design and high-profile tank
- Chrome trip lever
- 12" Unifit rough-in, less supply
- ADA compliant

Decorative, ADA compliant, high profile one piece toilet. Low consumption (4.8 Lpf/1.28 Gpf) siphon jet flushing action.

Tank cover, fittings, polished chrome trip lever, and Soirée® SoftClose® seat included.

### ■ MS934214EF

Elongated with SoftClose® white seat, 12" Unifit rough-in.

### □ SS214

Soirée SoftClose® Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

### □ TSU03W.10

10" UniFit rough-in: Optional

### □ TSU03W.12

12" UniFit rough-in: Supplied

### □ TSU03W.14

14" UniFit rough-in: Optional

#### Colors:

Standard #01 Cotton, #11 Colonial White  
#12 Sedona Beige, #03 Bone  
#51 Ebony

Optional See price book for additional colors

#### Trip Lever:

Standard #CP Polished Chrome

Optional See price book for additional finishes



# MS934214EF

## Eco Lloyd® One Piece Toilet, 1.28 GPF

### ■ PERFORMANCE

The TOTO® E-Max® low consumption toilets received high ratings during ANSI/ASME and CSA testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trap-way.

### ■ SPECIFICATIONS

Water Use: 1.28 Gpf / 4.8 Lpf  
 Flush System: Gravity Feed (E-Max System)  
 Min. Water Pressure: 8 psi  
 Water Surface: 10-3/4" x 8-1/4"  
 Trap Diameter: 2-1/8"  
 Rough-in: 12" rough-in  
 Trapseal: 2-1/4"  
 Warranty: One Year Limited Warranty  
 Material: Vitreous china

Shipping Weight: MS934214EF 105 lbs.

Shipping Dimensions: MS934214EF  
 32"L x 19-1/2"W  
 x 29"H

*Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CSA B 45 requirements.*


*Listing and approval: IAPMO/UPC, CSA, City of Los Angeles, State of MA, and others*



*Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor. For installation condition with approach from left hand side.*

*Recommended seat: SS214*

*These dimensions and specifications are subject to change without notice.*

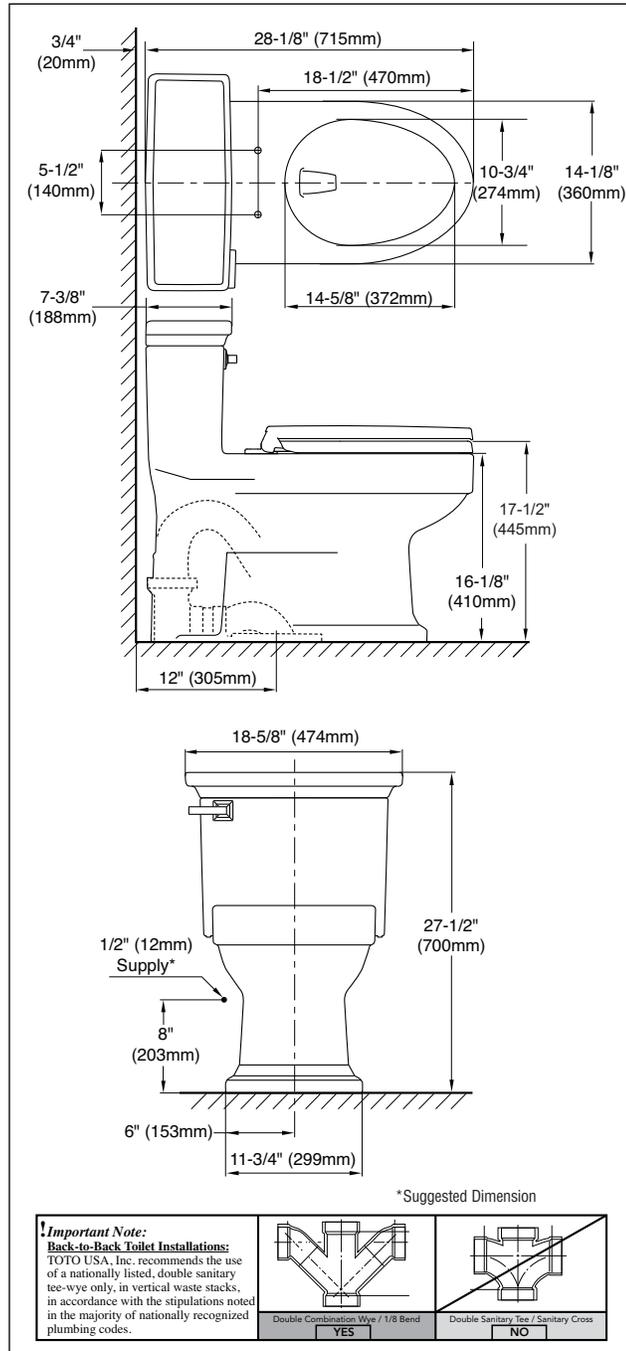

MS934214EF - Eco Lloyd® Toilet

# TOTO®

TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260  
 Tel. (888) 295-8134 • Fax. (770) 282-8701 • www.totousa.com  
 Printed in U.S.A. © TOTO LTD. 10/08 #A10292

Printed on recycled paper

REV 02/09