

# TOTO®

Perfection by Design

## MS854114S/MS853113S

### UltraMax One Piece Toilet, 1.6 GPF



- Sleek, high profile one piece design
- G-Max Technology
- Powerful, quiet flush every time
- Wide, 2 1/8" computer designed trapway
- Large water surface

High profile one piece toilet. Low consumption (6Lpf/1.6Gpf) siphon jet flushing action.

Tank cover, fittings, polished chrome trip lever, and SoftClose seat included.

■ **MS854114S**  
Elongated with SoftClose seat.

■ **MS853113S**  
Round with SoftClose seat.

■ **CST854S**  
Elongated, less seat.

■ **CST854SB**  
Bolt down lid.

■ **CST853S**  
Round, less seat.

□ **SS113**  
SoftClose: Seat and lid gently close with a touch of a hand.  
Round, closed front seat with lid.

□ **SS114**  
SoftClose: Seat and lid gently close with a touch of a hand.  
Elongated, closed front seat with lid.

□ **SC103**  
Round, open front seat with lid.

□ **SC134**  
Elongated, open front seat with lid.

□ **SC534**  
Elongated, open front seat less lid.


MS854114S - UltraMax Toilet with SoftClose Seat



G-Max Technology: Quiet, powerful, commercial grade flushing performance.



Complete with SoftClose seat, or upgrade to a TOTO washlet.

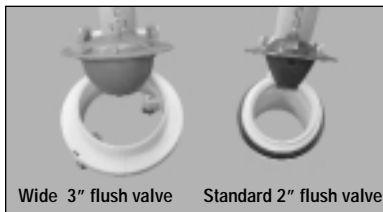

Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.

Colors:  
Standard #01 Cotton  
Optional See price book for additional colors

Trip Lever:  
Standard #CP Chrome Plated  
Optional See price book for additional finishes

# MS854114S/MS853113S UltraMax One Piece Toilet, 1.6 GPF

## ■ PERFORMANCE

The TOTO G-Max System offers outstanding commercial grade performance. The TOTO low consumption one piece toilet received high ratings during ANSI/ASME testing at independent laboratories. Designed with a powerful siphon jet flushing action, the bowl offers a large water surface and a 100% glazed trapway.

## ■ SPECIFICATIONS

Water Use: 6Lpf/1.6 Gpf  
 Flush System: Gravity Feed  
 (G-Max System)  
 Min. Water Pressure: 8 psi (Static)  
 Water Surface: 10<sup>1</sup>/<sub>4</sub>" x 8<sup>1</sup>/<sub>4</sub>"  
 Trap Dia.: 2<sup>1</sup>/<sub>8</sub>"  
 Rough-in: 12"  
 Trap Seal: 2<sup>5</sup>/<sub>8</sub>"  
 Warranty: Five Year Limited Warranty  
 Material: Vitreous China

Shipping Weight: **MS854114S/MS853113S** 89 lbs.  
 (Includes SoftClose Seat)


Shipping Dimensions:  
**MS854114S/MS853113S**  
 30<sup>3</sup>/<sub>4</sub>"L x 18<sup>1</sup>/<sub>8</sub>"W x 27<sup>1</sup>/<sub>8</sub>"H

*Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.*

*Listing / Approvals: IAPMO/UPC, CSA, City of Los Angeles, State of Massachusetts, and others.*

*These dimensions and specifications are subject to change without notice.*

U.S. Patent: D379.496 D406.329  
 5.918.325 5.983.413

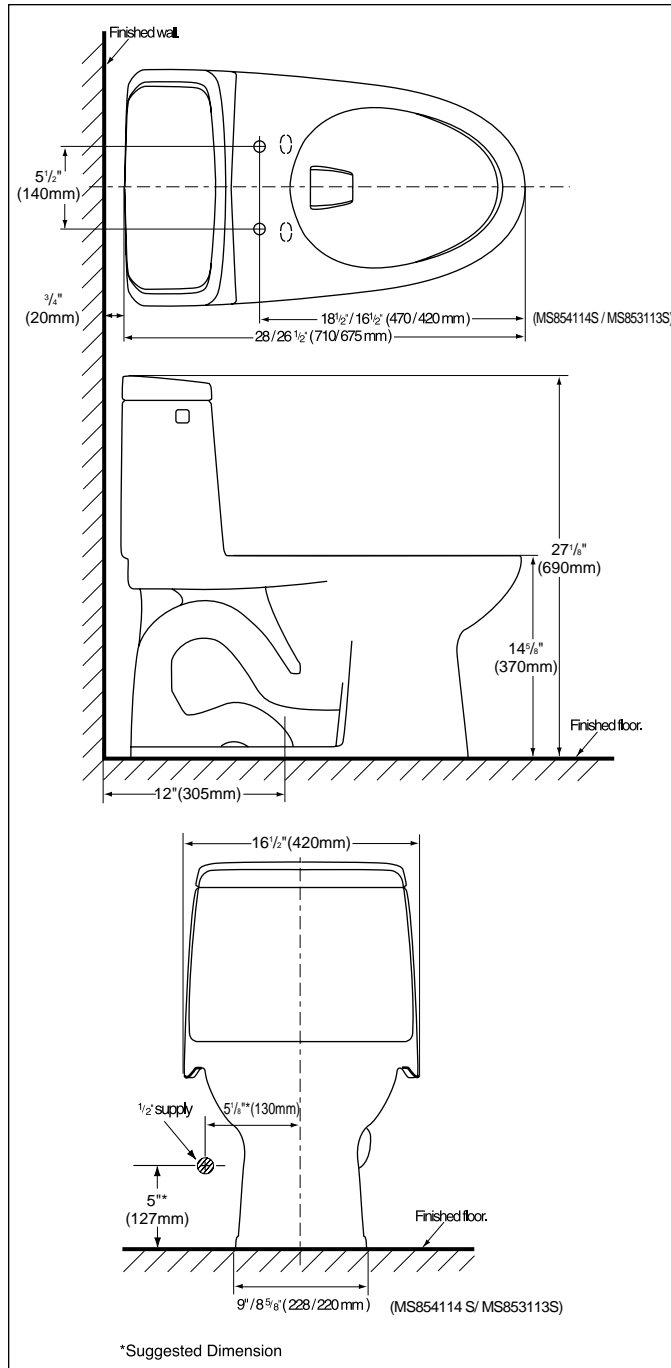

MS854114S/MS853113S - UltraMax Toilet