



# TEL3GG60R & TEL5GG60R Series

## Gooseneck EcoPower® Faucet

### FEATURES

- Hydropower self-generating system
- Sensor faucet with aerated flow
- Self adjusting faucet with control box and mounting hardware, less supply lines
- Single-hole mount

### MODELS

- TEL3GG60R - Single Supply - 1.0 gpc  
Discharge: On-demand; Up to 60 seconds while activated.
- TELGG100 - Gooseneck Spout
- TN78-9V560 - Single Supply Controller
- TEL5GG60R - Thermal Mixing - 1.0 gpc  
Discharge: On-demand; Up to 60 seconds while activated.
- TELGG100 - Gooseneck Spout
- TN78-10V560 - Thermal Mixing Controller

#### Optional Accessories:

- 1.0 gpm Laminar Flow Nozzle: TH559EDV432
- TN71V100S - 4" Cover Plate
- 71244T8CC - 8" Cover Plate



### CODES/STANDARDS

- Meets or exceeds ASME A112.18.1M/CSA B125.1, and ASSE 1070\*
- Certifications: IAPMO(cUPC), ASSE, State of Massachusetts, and others
- ADA compliant
- Complies with federal and state statutes as lead-free

### COLORS/FINISHES

- #CP Polished Chrome

### PRODUCT SPECIFICATION

**TOTO Model # \_\_\_\_\_** Automatic infrared sensor activated faucet. Anti-scald, thermal mixing chamber (thermal faucets only). Automatic sensor adjustment on installation.  
Maximum discharge 1.0 gpm  
Single hole faucet with optional 4" and 8" cover plates.



*\*Note: ASSE 1070 supersedes ASSE1016 for non-shower point of use devices. Applies to TEL5 series models.*

*\*Note: ASSE 1070 supersedes ASSE1016 for non-shower point of use devices. Applies to TEL5 series models.*

# TEL3GG60R & TEL5GG60R Series

## Gooseneck EcoPower® Faucet


### SPECIFICATIONS

- **Warranty** Three year warranty
- **Material** Brass
- **Power Supply** Hydropower self-generating system
- **Hot/Cold-Water Supply** Minimum Pressure (dynamic): 20PSI (0.07MPa)  
Maximum Pressure (static): 80PSI (0.55MPa)
- **Flow Rate** 1.0 gallons per minute
- **Water Supply Connect** 1/2" NPSM Male
- **Water Saving Function** Automatically turns OFF when user removes hands  
Maximum continuous run time is 10 seconds
- **Detection Time** ON feature: Immediate  
OFF feature: 1 second delay
- **Detection Range** Factory set at 2-1/4"  
Faucet automatically sets the detection range according to the size of the basin
- **Discharge Water Temperature Control Range** Thermal Mixing Faucet: Cold water - 104°F (Max)  
(When used under standard conditions)
- **Anti-scald Safety Feature** Provides the user protection against exposure to excessive water temperature  
(Thermal mixing faucet, only)


### NOTE

Following the Federal mandate for water efficiency outlined in the Environmental Protection Act of 1992, Faucets can be rated for water consumption based on two categories: flow rate and water consumption. With the "Water Consumption" standard, a faucet must not use more than 0.25 gallon of water per cycle. The TOTO® faucet with a 60 second cycle uses 1.0 gallon per minute. Furthermore, an innovative design feature incorporated into all TOTO electronic faucets is an "ON-DEMAND" mode. This means that the faucet will only deliver water as needed and will not run the entire duration of its rated cycle - either 10 or 60 seconds. This guarantees additional water savings.

\*Water pressures over 80 psi are not recommended for most plumbing fixtures.

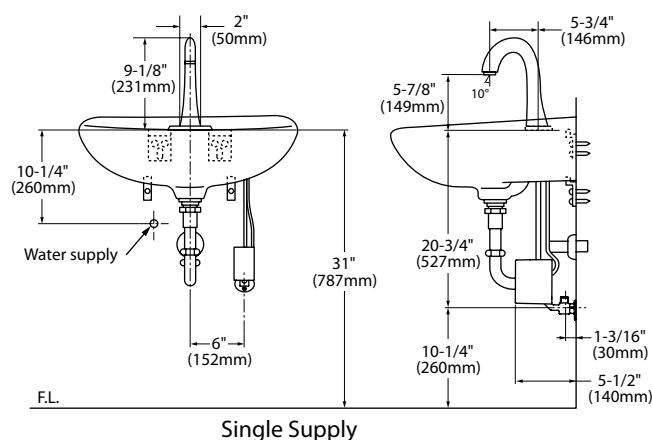

Maximum deck thickness 2" (50mm)

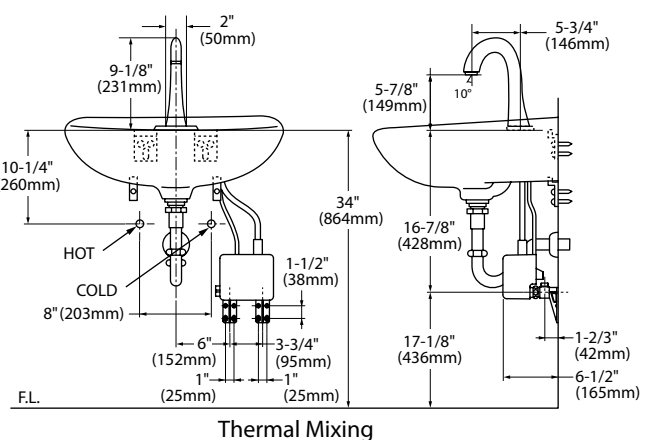

**TOTO®**

*These dimensions and specifications are subject to change without notice*