



TL170DDLQ

Kiwami® Renesse® Widespread Lavatory High-Efficiency Faucet, 1.5 gpm

FEATURES

- WaterSense certified low-flow 1.5 gpm faucet
- Solid brass construction
- Ceramic disk valve cartridge
- Accommodates 8" -16" spread
- Metal pop-up drain assembly included



COLORS/FINISHES

- #CP Polished Chrome

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1, NSF 61-9
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California AB1953, Vermont S.152 & Maryland HB. 372, California Green Building Code, City of Los Angeles Water Efficiency Ordinance



PRODUCT SPECIFICATION



The widespread lavatory faucet shall have a maximum flow rate of 1.5 gpm (5.7 lpm). Product shall have a solid brass construction. Product shall have a ceramic disk valve cartridge. Product shall accommodate 8" - 16" spread. Product shall include metal pop-up drain assembly. Product shall be compliant with California AB1953, Vermont S.152 & Maryland HB. 372. Product shall be TOTO Model TL170DDLQ#_____.

TL170DDLQ

Kiwami® Renesse® Widespread Lavatory High-Efficiency Faucet, 1.5 gpm

SPECIFICATIONS

- | | |
|-----------------------|---|
| • Warranty | Lifetime Limited Warranty
(Residential Use)
One Year (Commercial Use) |
| • Material | Brass |
| • Shipping Weight | 12.7 lbs. |
| • Shipping Dimensions | 20-1/2" L x 10" W x 3-1/2" H |
| • Maximum Flow Rate | 1.5 gpm (5.7 lpm) |

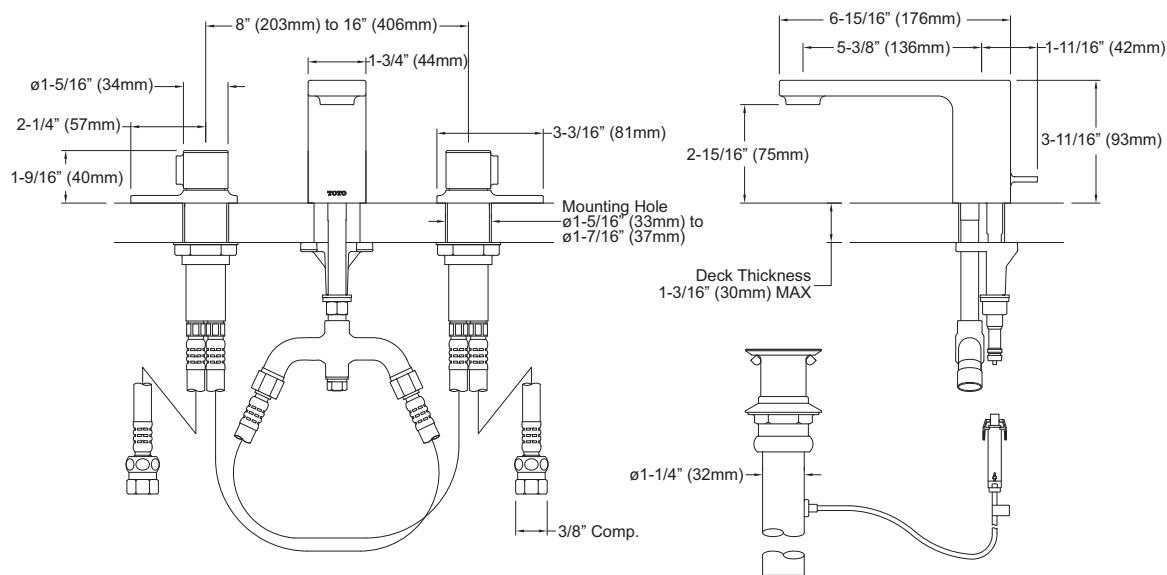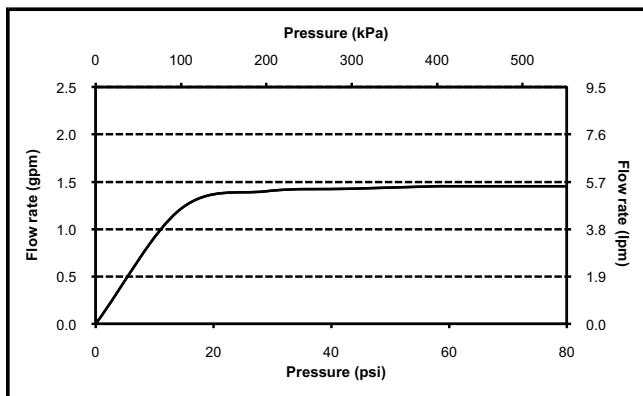

TOTO®

These dimensions and specifications are subject to change without notice