Upton™ Single-Handle Lavatory Faucet

FEATURES

- WaterSense certified low-flow 1.5 gpm faucet
- Lever handle
- Solid brass construction
- Ceramic disk mixing cartridge
- Metal pop-up drain assembly included

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1, NSF 61-9
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California AB1953, Vermont S.152 & Maryland HB. 372, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant







PRODUCT SPECIFICATION

The single-handle lavatory faucet shall have a maximum flow rate of 1.5 gpm (5.7 lpm). Product shall have a lever handle. Product shall have a solid brass construction. Product shall have a ceramic disk mixing cartridge. Product shall include metal pop-up drain assembly. Product shall be compliant with California AB1953, Vermont S.152 & Maryland HB. 372. Product shall be TOTO Model TL630SD#____.



$\mathsf{Upton}^{\scriptscriptstyle\mathsf{TM}}\,\mathsf{Single}\text{-}\mathsf{Handle}\,\,\mathsf{Lavatory}\,\,\mathsf{Faucet}$

SPECIFICATIONS


• Warranty Lifetime Limited Warranty


(Residential Use)

One Year (Commercial Use)

Material BrassShipping Weight 7.3 lbs.

Shipping Dimensions 21"L x 10"W x 3-1/2"H
Maximum Flow Rate 1.5 gpm (5.7 lpm)

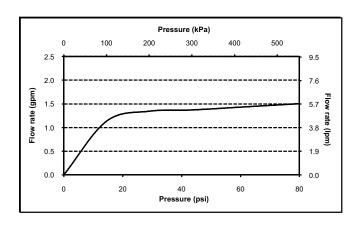

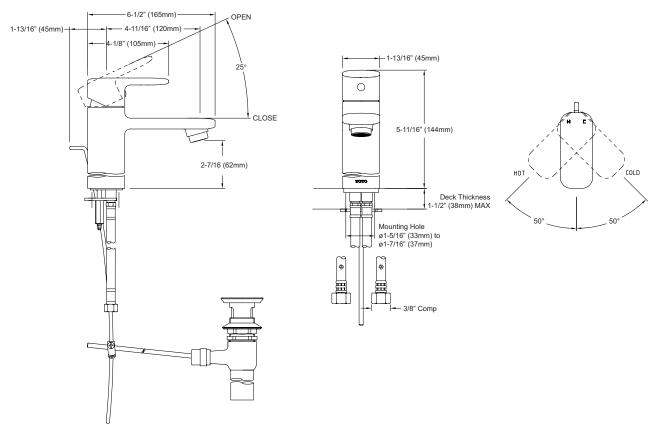



These dimensions and specifications are subject to change without notice