# Guinevere® Single-Handle Lavatory High-Efficiency Faucet, 1.5 gpm

## **FEATURES**

- WaterSense certified low-flow 1.5 gpm faucet
- Lever handle
- Solid brass construction
- Ceramic disk mixing cartridge
- Metal pop-up drain assembly included

#### **COLORS/FINISHES**

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel
- #RB Oil Rubbed Bronze

#### CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1, NSF 61-9
- Certifications: IAPMO (cUPC), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California AB1953, Vermont S.152 & Maryland HB. 372, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant







# PRODUCT SPECIFICATION

The single-handle lavatory faucet shall have a maximum flow rate of 1.5 gpm (5.7 lpm). Product shall have a lever handle. Product shall have a solid brass construction. Product shall have a ceramic disk mixing cartridge. Product shall include metal pop-up drain assembly. Product shall be compliant with California AB1953, Vermont S.152 & Maryland HB. 372. Product shall beTOTO Model TL970SDLQ#\_\_\_\_.



# Guinevere® Single-Handle Lavatory High-Efficiency Faucet, 1.5 gpm

## **SPECIFICATIONS**

• Warranty Lifetime Limited Warranty


(Residential Use)


One Year (Oil Rubbed Bronze) One Year (Commercial Use)


Material BrassShipping Weight 6.0 lbs.


Shipping Dimensions 20-1/2"L x 9-3/4"W x 3-1/2"H

• Maximum Flow Rate 1.5 gpm (5.7 lpm)







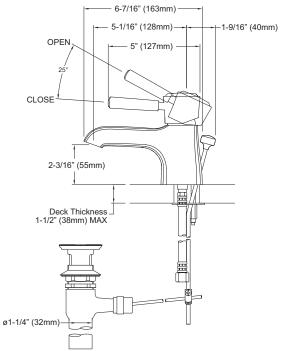

TOTO®

These dimensions and specifications are subject to change without notice