


1. General Description
  - a. A low height shower door that eases shower entry and exit, improves privacy and warmth for bather, permits caregiver access, and protects caregiver from overspray.
2. Item Codes and Descriptions
  - a. 91110N . . . Alcove caregiver door
3. Physical Characteristics
  - a. Door height: 29½"
  - b. Door width: fits alcoves 46¾" to 47¾" wide with supplied compensators
  - c. Two compensators are supplied with each caregiver door model
  - d. Up to 4" greater width may be achieved with the use of extra-wide compensators
    - i. 2" additional width with each extra-wide compensator
    - ii. each extra-wide compensator replaces an original compensators
    - iii. installer may use any combination of original and extra-wide compensators
  - e. Compensators mount to the walls, and doors are secured into the compensators
  - f. Aluminum frames with PET plastic panels
  - g. PET panels are embossed with a surface texture
  - h. PET plastic panels will not shatter
  - i. A magnetic strip is installed at the unhinged edge of each door
  - j. Each door segment has an elastomeric gasket that contacts the floor
  - k. Hinges and caps are made of nylon 6
  - l. Bi-fold doors swing 180° in and out, and fold against each other
  - m. Handles pivot to unlock or lock adjacent door segments
  - n. Color
    - i. frames: white
    - ii. corners: gray
    - iii. compensators: white
    - iv. compensator caps: gray
    - v. handles: white
    - vi. elastomeric gaskets: gray
  - o. Fasteners not included
4. Performance Characteristics
  - a. For Mullen and wet room installations
  - b. No rust construction
  - c. Door swing allows generous access
  - d. Pattern on PET panels provides privacy
  - e. Magnetic strips and gaskets increase water retention
  - f. Handles are designed to give way to the force of a fall against the doors, thus limiting injury to the user and damage to the doors (replacement handles are available)
  - g. Compensators allow for adjustments in overall fit, sizing the doors for width, and ensuring a plumb installation
5. Other Information
  - a. 5 year limited warranty when installed in commercial settings
  - b. 10 year limited warranty when installed in residential settings
  - c. See AKW warranty for details

# Specification & Submittal Form 91110N Caregiver Door



Bi-fold doors swing 180°

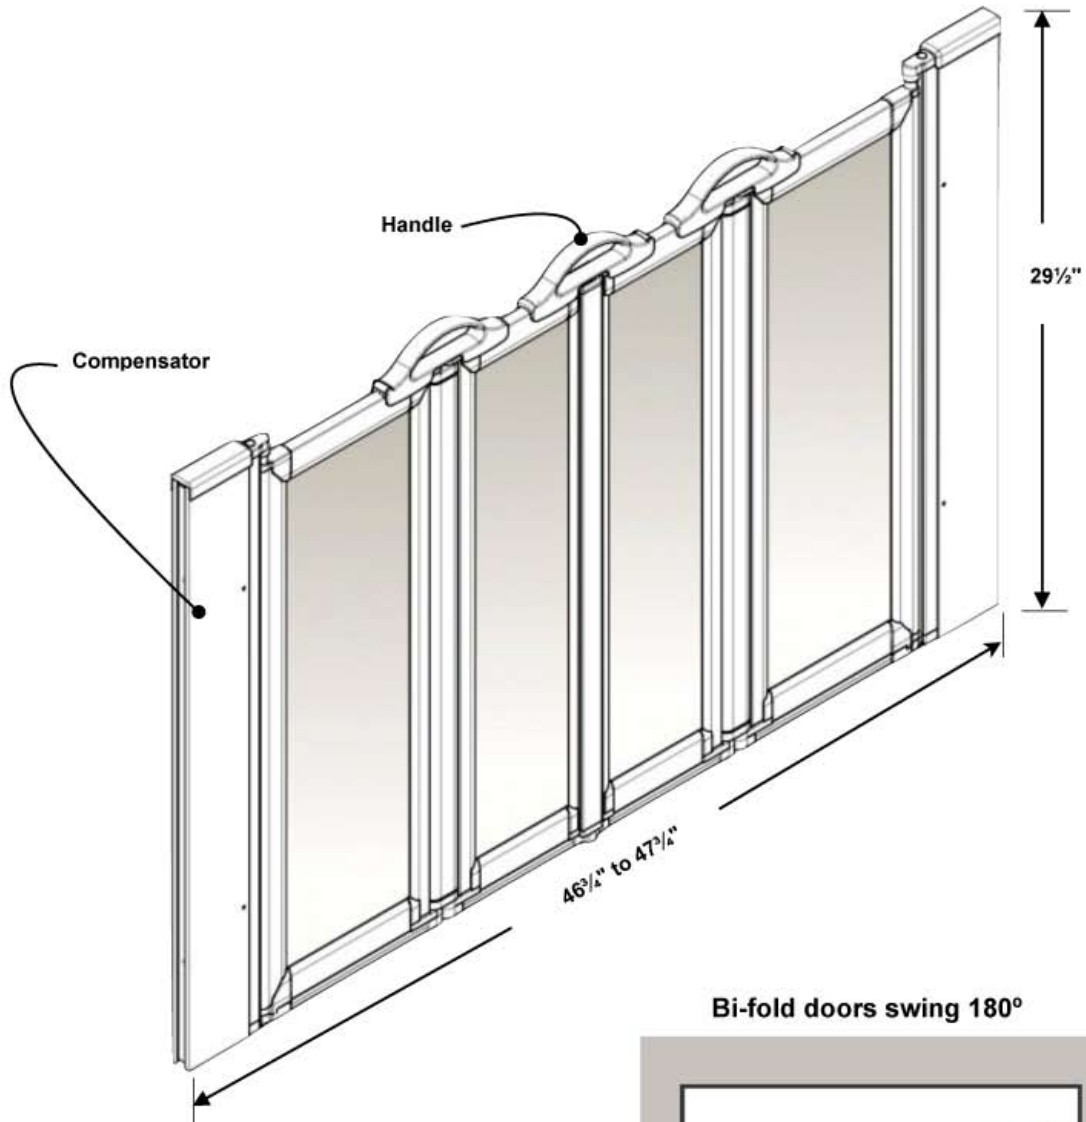