

FEATURES

- 39½" x 37¾" Shower Walls for new and existing construction.
- Thick 1/4" 100% solid surface material bonded to an 1-1/4" thick aluminum honeycomb polyurethane filled backer for superior strength. Fire retardant wood backer. Solid surface material is easy to clean and will not support bacteria growth.
- 3-piece wall design glues directly to studs with supplied adhesive. Back wall can be alternately installed with aluminum hanging rail provided.
- Aluminum channel joints for easy installation and uniform structure.
- Four wall shelves included for convenient storage.
- Wall Kit includes 8" long chrome shower arm, 15" slotted hanging rail, four 11-oz. tubes quick dry panel adhesive and two 11-oz. tubes 100% silicone adhesive.
- 10 Year Limited Residential Warranty / 3 Year Commercial Warranty

COLORS

- 3 Transitions colors with a 16" x 16" square tile pattern.
- 2 Classic colors with plain pattern

OPTIONS

- Dome Top slides in place and sits on top of the shower walls forming a complete 8' shower enclosure. The dome contains (1) waterproof UL approved 12 volt LED light (40 year life).
- Matching shower base with concealed drain. Trench drain and collapsible threshold models available.
- Safety grab bar sets, personal hand shower and fold-up shower seat.

	SIZE	MODEL NO.	DESCRIPTION	Width	Depth	Height
COMPLETE SHOWER KITS						
Shower Kits with Trench Drain Base						
<input type="checkbox"/>	39" x 38"	DKWFG3988	Walls & Base Kit	39½"	37¾"	83"
<input type="checkbox"/>	39" x 38"	DKWFGT3988	Walls, Base, Dome Kit	39½"	37¾"	95¾"
Shower Kits with Collapsible Threshold Base						
<input type="checkbox"/>	39" x 38"	DKWFC3988	Walls & Base Kit	39½"	37¾"	83"
<input type="checkbox"/>	39" x 38"	DKWFCT3988	Walls, Base, Dome Kit	39½"	37¾"	95¾"
SHOWER WALLS (only) KIT						
<input type="checkbox"/>	39" x 38"	DKW3988	Wall Kit	39½"	37¾"	80"
	39" x 80"	DB398A	Back Wall (1 pc.)	39½"		80"
	38" x 80"	DE388A	End Wall Set (2 pcs.)		37¾"	80"
INDIVIDUAL COMPONENTS						
<input type="checkbox"/>	39" x 38"	T3981	Dome Top	39½"	37¾"	12¾"
SHOWER BASE						
<input type="checkbox"/>	39" x 38"	FC3938	Collapsible Threshold	39½"	37¾"	3"
<input type="checkbox"/>	39" x 38"	FG3938	Trench Drain	39½"	37¾"	3"

To Be Specified: Pattern/Color (see below)

16" Square Tile Pattern / Colors



<input type="checkbox"/>	91 White Carrara
<input type="checkbox"/>	94 Sand Mountain
<input type="checkbox"/>	96 Almond Sky


Plain / Colors



<input type="checkbox"/>	01 White
<input type="checkbox"/>	86 Sea Shore



DIRECT-TO-STUD

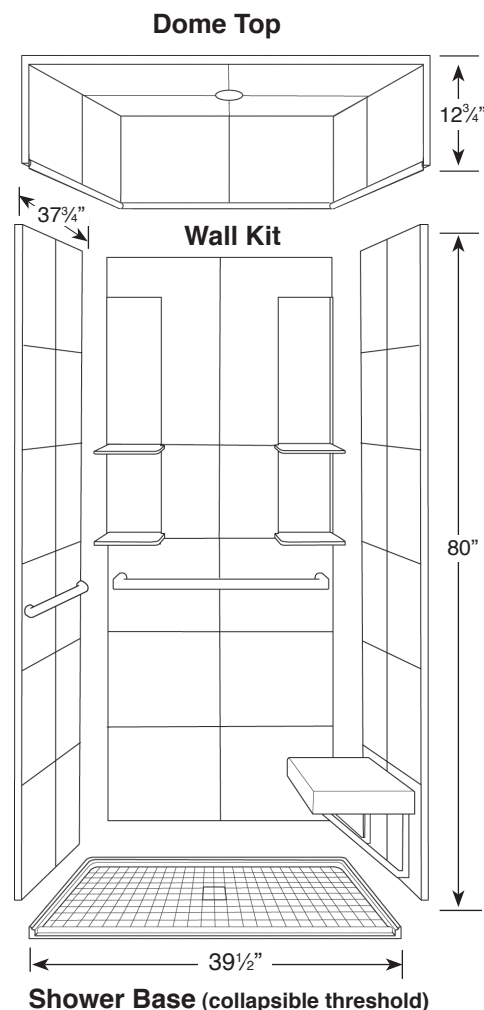

39½" x 37¾" ADA shower DKWF_3988




DIRECT-TO-STUD

INSTALLATION NOTES

This product is to be installed according to the installation guide.


Drain cutout in subfloor to be 4-1/2" diameter and located per the rough-in Illustration 1. Dry fit the shower base to ensure a proper fit and correct alignment of the shower drain and the hole in the floor.

Unit can be installed with aluminum hanging rail provided. Alternate adhesive method of installation can be used without the use of the hanging rail (see full instructions for details). Position of hanging rail mounting is also critical. See Illustration 2 for horizontal positioning of hanging rail. The top of the hanging rail to be positioned at 76" above finished floor when using a 3" high Transolid shower base. When you do not use a Transolid shower base the upper hanging rail should be installed 73" above the finished threshold.

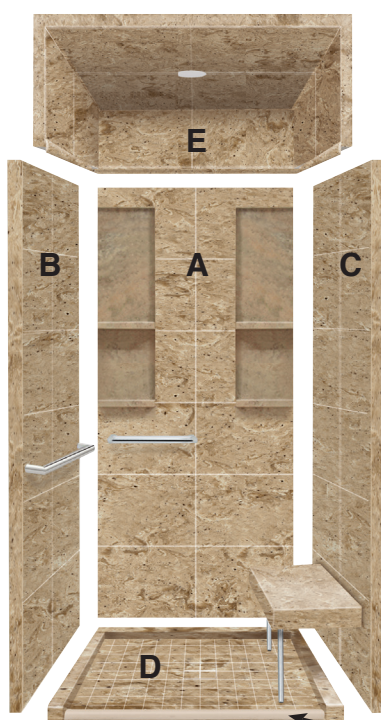

Strong 2-layer construction


1½" thick Aluminum Honeycomb Backer provides strength and structure.




1/4" thick solid surface material for beauty and smooth bacteria free surface



Pre-drilled holes with stainless ferules allow for precise placement of grab bars



Concealed drain with color-matched lift-off drain cover, 2¼" mosaic tile pattern.



Trench drain or collapsible threshold allows for roll-in entry, but doesn't allow water to flow out of base.




Illustration 1


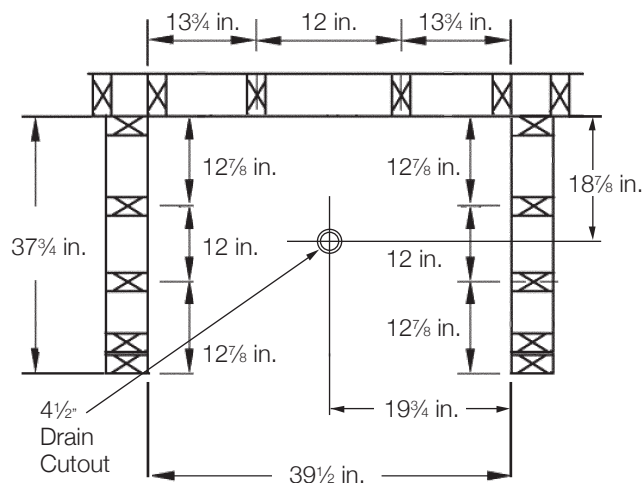


Illustration 2

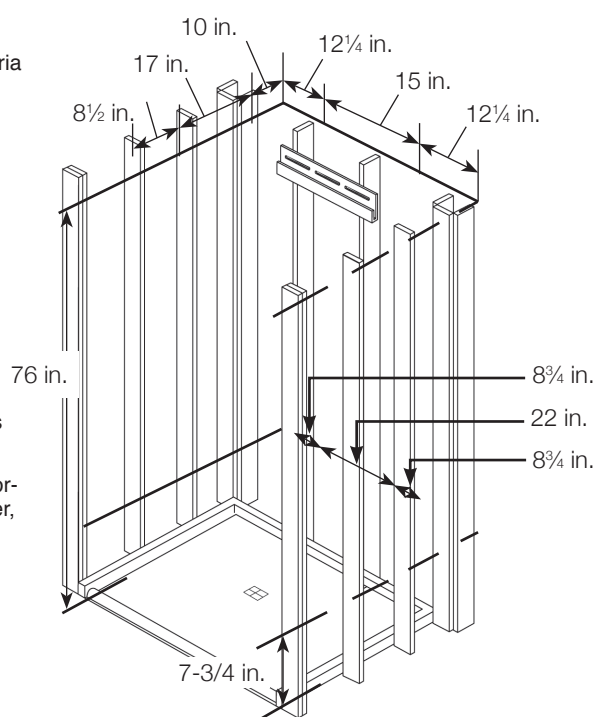

OPTIONS: ACCESSORIES

Available for on-site installation. Must be ordered separately. See Accessories Specification for further information.

SHOWER SEAT & GRAB BAR SETS

	MODEL	DESCRIPTION
<input type="checkbox"/>	H2513	Rectangular Fold-up Seat
<input type="checkbox"/>	GB1529PS	1¼" Grab Bar Set: (1) 29", (1) 15" Stainless
<input type="checkbox"/>	GB2929PS	1¼" Grab Bar Set: (3) 29" Pol. Stainless
<input type="checkbox"/>	GBHS18PS	Hand Shower with 18" ADA Bar

	MODEL NO.	DESCRIPTION
A	DB398A	Back Wall (1 panel)
B	DE388AL	Left End Wall (1 panel)
C	DE388AR	Right End Wall (1 panel)
D	FC3938	Collapsible Threshold Shower Base - center drain
D	FG3938	Trench Drain Shower Base - center drain
E	T3981	Dome Top with (1) LED Light

Compliance Certifications -

Meets or Exceeds the Following Specifications

- IGC 154-2012
- ASME A112.18.1 / CSA B125.125.1-11
- cUPC®



Showers will comply with the Americans with Disabilities Act when installed per requirements of the 2010 ADA Standards for Accessible Design, Section 608 Shower Compartments, of the Act.