

Features

- Base designed to replace bathtub. Drain positioned 8-1/2" from wall to align with existing bathtub drain.
- Heavy Duty SMC Sheet Molding Compound Material
- Light weight. Natural stone effect.
- 63" length bases meet ADA requirements
- SMC color-matched drain cover conceals a conventional 2" shower drain (not supplied)
- Stock bases can be used as a Single, Double or Triple Threshold
- Ultra low threshold front curb for easy access. After underlayment and finished floor are installed, there is a virtually flush entrance to the shower.
- Slip-resistant lightly textured slate floor maintains an easy to clean surface
- 1" high aluminum tiling flange included
- 10 Year Limited Residential / 3 Year Commercial Warranty

Stock Sized Specified Models


	Model No.	Length A	Width B	Height
<input type="checkbox"/>	FZSR6032R/L	59.1"	31.5"	1.0"
<input type="checkbox"/>	FZSR6036R/L	59.1"	35.5"	1.0"
<input type="checkbox"/>	FZSR6332R/L*	63"	31.5"	1.0"
<input type="checkbox"/>	FZSR6336R/L*	63"	35.5"	1.0"

* Meets ADA requirements

CUSTOMIZABLE BASE

Note: Bases can be built to accommodate unique sizes. Notches can also be cut from the bases to allow for columns in a corner.


Base can be built to custom sizes within certain limitations. Can be trimmed up to 4" in width from side opposite drain or up to 2" from depth. Base is designed to be used as a single, double or triple threshold in stock sizes and single threshold models in custom sizes

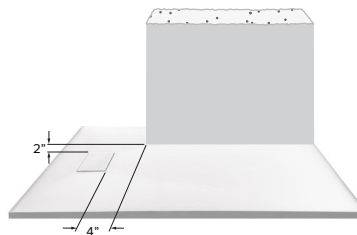

Tiling flange


To Be Specified: Color

<input type="checkbox"/>	31 White
<input type="checkbox"/>	32 Cameo
<input type="checkbox"/>	40 Grey
<input type="checkbox"/>	09 Black



Compliance Certifications

Meets or Exceeds the Following Specification

- IGC 154-2012
- ASME A112.18.1 / CSA B125.125.1-11
- IAPMO 
- cUPC®



Before

After



Modern Slip Resistance with a stone-look texture. Slip resistant and easy to clean as well as.

