

SHOWER GRAB BAR SHELF INSTALLATION INSTRUCTIONS

Questions, problems, missing parts?

Before returning to your retailer, call our customer service department at 1-844-974-2400, 9 a.m. - 5 p.m., EST, Monday - Friday

Shower Shelf Models


20" Shelf
30" Shelf

PLEASE READ THESE INSTALLATION INSTRUCTIONS THOROUGHLY PRIOR TO INSTALLING THIS SHOWER SHELF

IMPORTANT: THIS PRODUCT SHOULD ONLY BE INSTALLED BY QUALIFIED AND TRAINED PERSONNEL

FAILURE TO FOLLOW THESE INSTRUCTIONS COULD LEAD TO IMPROPER INSTALLATION OF THE SHOWER SHELF, STRUCTURAL AND/OR WATER DAMAGE TO THE WALL AND IN-WALL SUPPORT STRUCTURES, AND/OR SERIOUS BODILY INJURY IN USE. IN ADDITION, ALL WARRANTIES, EXPRESS OR IMPLIED, WILL BE NULL & VOID DUE TO IMPROPER INSTALLATION OF THIS PRODUCT. THE MANUFACTURER DOES NOT ASSUME ANY LIABILITY FOR DAMAGE RESULTING FROM SERVICES PERFORMED BY OTHERS, OR FAULTY INSTALLATION, MISUSE OR MISAPPLICATION OF GOODS.

TO ASSURE PROPER AND SAFE INSTALLATION, THIS SHOWER SHELF MUST BE INSTALLED INTO A MINIMUM 2" THICK SOLID WOOD IN-WALL BACKING MATERIAL. MAKE CERTAIN IN-WALL BACKING COMPLIES WITH ALL LOCAL BUILDING CODE REQUIREMENTS.

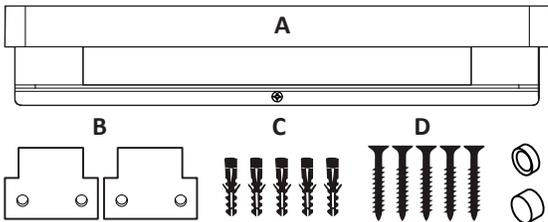


HARDWARE PROVIDED

- A Shelf (1)
- B Mounting Brackets (2)
- C Wall Anchors (5)
- D Self-Tapping Screws (5)
- E Screw Cap Base (1)
- F Decorative Screw Cap (1)


TOOLS REQUIRED

- Pencil
- Level
- Power Drill
- 3/16" Drill Bit
- Philips Screw Driver
- Silicone



STEP #1: LOCATION

- Remove Shower Shelf from package.
- Locate the area with 2" solid wood in-wall backing on the desired mounting location.
- Place the shelf in position on the wall. Using a level (not provided), ensure the shelf is level and mark the location for drilling of the mounting holes in the wall.
- Using a pencil or suitable marker, it is **extremely important** you mark the center of each of the five (5) mounting holes precisely on the mounting surface.

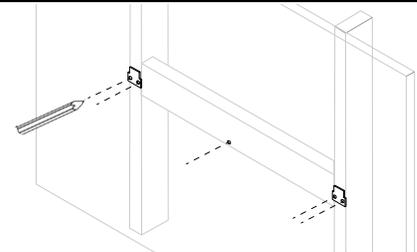

Proceed cautiously with installation process to avoid drilling into electrical and/or plumbing behind wall.

All mounting points must fasten into structural wood backing (minimum 2" thickness). Where possible, drill through tile - not grout.

STEP #2: MOUNTING

Drill five holes with a 3/16" drill bit (not provided) at the locations indicated.

Apply silicone to hole to ensure a water-tight seal. Tap in wall anchors. Position and install mounting brackets with four self-tapping screws to secure brackets to wall.

MOUNTING

Position shelf above brackets and slide down onto brackets. Before securing remaining self-tapping screw in center position, place screw through screw cap base and secure screw into wall anchor. After center screw is secure and counter sunk into screw cap base, snap on decorative cap. Using a level, confirm shelf is mounted level. If not, small adjustments can be made to brackets.

