

Saramar

FEATURES

- Shower Walls with a realistic 4" x 8" subway tile pattern and velvet smooth finish for new or existing construction. Monterey has the realistic look of tile without the maintenance of grout.
- Thick 1/4" compression molded surface material for superior strength, beauty and easy cleaning. Surface will not support bacteria growth.
- Easier to install than tile. Walls glue right over existing surface. Walls are trimmable for custom fit.
- Standard Wall Kits include three wall panels and inside corner trims.
- Transition Wall Kits include three 72" / 84" H wall panels, PTK pencil trim kit, and extension wall kit that adds up to an addtional 12" / 24" in height.
- Monterey® solid surface material has color all the way through for a renewable surface.
- •10 Year Limited Residential Warrant / 3 Year Commercial Warranty

COLOR

• 3 Classic and 4 Marble colors. All the colors are available in tile and velvet smooth finishes.

OPTIONS

• Storage pods & caddies, grab bars, storage shelves, shower seats & benches are available to coordinate with the walls.

RECOMMENDED ADHESIVE (sold separately)


- •60" and 72" Kits: (3) T100 clear & (2) T200 color-matched, mildew-resistant silicone
- •96" Kits: (2) T200 color-matched, mildew-resistant silicone

Specified Model:


	SIZE	MODEL NO.	Width	Depth	Height	Weight(lbs)	
SHO	SHOWER WALL KITS 60"						
	60" x 36" x 60"	SWK603660	60"	36"	60"	180	
SHO	OWER WALL KIT	S 72"					
	36" x 36" x 72"	SWK363672	36"	36"	72"	156	
	48" x 36" x 72"	SWK483672	48"	36"	72"	168	
	60" x 36" x 72"	SWK603672	60"	36"	72"	190	
SHO	OWER WALL KIT	S 96"					
	36" x 36" x 96"	SWK363696	36"	36"	96"	193	
	48" x 36" x 96"	SWK483696	48"	36"	96"	223	
	60" x 36" x 96"	SWK603696	60"	36"	96"	252	
	60" x 48" x 96"	SWK604896	60"	48"	96"	299	
	60" x 60" x 96"	SWK606096	60"	60"	96"	321	



SWK603696 shown with optional STH5814-BS storage pod, FL6036L shower base and SSSL2412L-BS01



To Be Specifled: Color

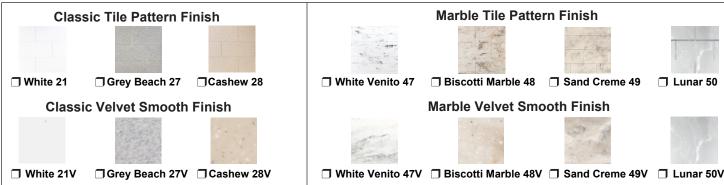




Transition Wall Kits: SWKX Single Panel: SW


Transition Wall Kits Specified Model:

	SIZE	MODEL NO.	Width	Depth	Height	Weight(lbs)		
TRA	TRANSITION SHOWER WALL KITS 72"/24"							
	36"x36"x72"/24"	SWKX36367224	36"	36"	96"	198		
	48"x36"x72"/24"	SWKX48367224	48"	36"	96"	228		
	60"x36"x72"/24"	SWKX60367224	60"	36"	96"	257		
TRA	ANSITION SHOW	ER WALL KITS 84"/	12"					
	36"x36"x84"/12"	SWKX36368412	36"	36"	96"	198		
	48"x36"x84"/12"	SWKX48368412	48"	36"	96"	228		
	60"x36"x84"/12"	SWKX60368412	60"	36"	96"	257		



Single Panel Specified Model:

	SIZE	MODEL NO.	DESCRIPTION	Width	Height	Weight(lbs)
SHO	OWER WALI	PANEL 72"				
	36" x 72"	SW3672	Shower Wall	36"	72"	40
	48" x 72"	SW4872	Shower Wall	48"	72"	52
	60" x 72"	SW6072	Shower Wall	60"	72"	64
SHO	OWER WALI	PANEL 96"				
	36" x 96"	SW3696	Shower Wall	36"	96"	64
	48" x 96"	SW4896	Shower Wall	48"	96"	85
	60" x 96"	SW6096	Shower Wall	60"	96"	107



	DESCRIPTION
Α	Back Wall (1 panel)
В	Left End Wall (1 panel)
С	Right End Wall (1 panel)
D	Optional Inside Corner Trim (2 pcs.)

Shower Wall w/ Deco Strip Kits Specified Model:


	SIZE	MODEL NO.	Wall Color	Recommended Deco Strips	Weight (lbs)
DE	CO WALL KITS	96"H			
	60" x 36" x 96"	SWKD603696-	27(V)/50(V)	DW	307
	60" x 36" x 96"	SWKD603696-	28(V)/48(V) /49(V)	НО	307

SWKD603696 includes SWK603696 3-pc wall kit, SMDSHK 3-pc Deco Strip Kit (2) 5"H x 36"W, (1) 5"H x 60"W. Deco Strips are .25" thick.





Diamond White DW



	DESCRIPTION	
Α	Back Wall (1 panel)	
В	Left End Wall (1 panel)	
С	Right End Wall (1 panel)	
D	Back Wall Deco Strip (1 strip)	
Е	Left Wall Deco Strip (1 strip)	
F	Right Wall Deco Strip (1 strip)	



STRATFORD Bypass Shower Door SBP-


FEATURES

- An attractive, semi-frameless smooth sliding Bypass shower door that features a special Nano Protected surface treatment that keeps glass looking clean.
- Up to 1/4" adjustment per side and 1/2" overall for out-of-plumb (uneven) walls within wall profiles.
- Walk-in opening: 21" to 21-1/2" for 48" width door and 27" to 27-1/2" for 60" width door.
- Clearance height: 56-7/8" for 60" height door and 74-7/8" for 78" height door.
- · Tempered glass is ANSI Z97.1. certified.
- · Glass thickness: 5/16" (8mm) available in Clear and Full Frost.
- · Frame is made from aluminum.
- Hardware finishes: Polished Chrome, Brushed Stainless, Champagne Bronze, and Matte Black.
- ${\boldsymbol{\cdot}}$ Shower base threshold minimum requirement is 2" wide.
- Doors come with a pair of 1" (25mm) diameter round tube bypass handles.
- · Easy to install.
- IMPORTANT! All measurements should be taken only AFTER walls are finished (tile, back walls, etc.); Professional installation recommended.
- · Limited Lifetime Warranty for residential and 1 year for commercial.




Specify Model

Size	Model	Glass	Width	Height	Weight (lbs)
48X80	SBP487808C-	Clear (8 mm)	48"	80"	85
48X80	SBP487808F-	Frost (8 mm)	48"	80"	85
60X62	SBP606008C-	Clear (8 mm)	60"	62"	95
60X62	SBP606008F-	Frost (8 mm)	60"	62"	95
60X80	SBP607808C-	Clear (8 mm)	60"	80"	120
60X80	SBP607808F-	Frost (8 mm)	60"	80"	120



To Be Specified : Hardware Color











Chrome Brushed Stainless

Champagne Bronze


Matte Black

To Be Specified: Glass







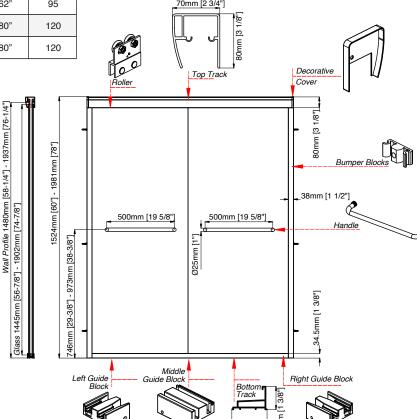



60" x 36" URSULA Alcove Bathtub UATTR603620-L/R

Features

- 60" X 36" x 20-1/4" alcove bathtub.
- Acrylic material
- Left-hand or right-hand drain location. (Must specify LH or RH when ordering.)
- Standard bathtub: through-the-floor drain installation.
- Drain not included.
- Round overflow hole
- Has anti-slip texture on bottom.
- 10 Year Limited Residential Warranty / 3 Year Commercial Warranty

Options:

• TDT- Traditional bathtub drain with round overflow in decorative finishes. See back for information.

Specified Model


MODEL	UATTR603620-L/R
Dimensions	60" x 36" x 20-1/4"
Drain Outlet	Left-Hand or Right-Hand
Water Capacity	84.22 gallons
Item Weight	70.56 lbs.
Shipping Weight	86 lbs.
Material	Acrylic
Installation	Alcove
Required	Wall mount faucet


To Be Specified:

COLOR	
White	
FINISH	
Gloss	





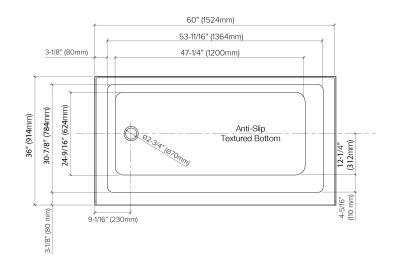





Meets or Exceeds the Following Specifications CSA B45.5/IAPMO Z124

1-1/4" (32 mm) 20-1/4" (514 mm)

Lumbar _ Angle 15'



60" x 32" URSULA Alcove Bathtub UATTR603220-L/R

OPTIONAL

SMTDT bathtub drain in decorative finishes


SPECIFICATIONS

SMTDT traditional Bathtub Drain with Overflow. Drain is available in PVC only.

Finishes: PC Polished Chrome, BN Brushed Nickel, MB Matte Black, and WH White.

To Be Specified:


FINISH
PC Polished Chrome
BN Brushed Nickel
MB Matte Black
WH White









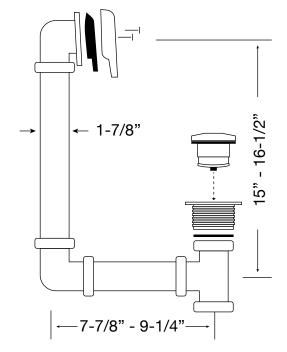



FEATURES:

- Transolid stainless steel grab bar shelves are a beautiful, easy-to-install addition to Transolid Titan, Prodigy, Expressions, and SaraMar solid surface walls, or any other solid surface or tile shower.
- Grab bar includes 14-gauge shelf and 8-gauge rail to ensure shower products and accessories do not fall from the shelf.
- Includes concealed mounting hardware and installation guide.
- Install directly on tile inside or outside of the shower, requires 2-in solid wood in wall backing.
- Compatible with many bathroom accessories offered by Transolid to complete your desired style.
- Durable stainless steel provides safe storage with a weight capacity up to 300lbs., long-lasting corrosion, rust, and chemical resistant.



WARRANTY

Lifetime Limited Residential / 5 Year Commercial

INSTALLATION REQUIREMENT

To assure proper and safe installation, use minimum 2" thick solid wood in-wall backing material.
 Backing must comply with building code requirements.

To Be Specified:


MODEL NO.	DESCRIPTION	Height	Width	Depth
JGBS20	20" Grab Bar shelf	3"	20"	4"
JGBS30	30" Grab Bar shelf	3"	30"	4"

TO ORDER add the finish code to end of model number

To Be Specified: Finish

Code	Finish
PC	Polished Chrome
BS	Brushed Stainless
МВ	Matte Black
СВ	Champagne Bronze



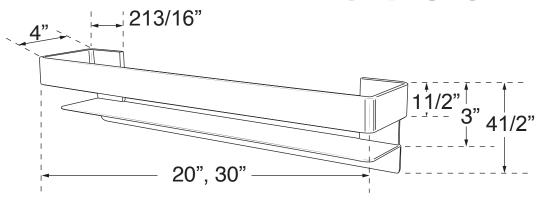



FEATURES

- Decorative wall mount self draining corner shower shelf provides convenient storage for shampoos, soaps and accessories.
- Heavy duty 304 stainless steel.
- Mounting hardware and mounting template included.

FINISH


• 2 finishes: polished chrome, brushed stainless

WARRANTY

Lifetime Limited Residential / 5 Year Commercial

INSTALLATION REQUIREMENT

 Wood blocking is preferable behind all wall surfaces. Use framing studs for mounting when available. If wood blocking is not available, the following fasteners are suggested: Tile/Masonry-Plastic or lead Anchors Plaster/drywall-Toggle bolts.

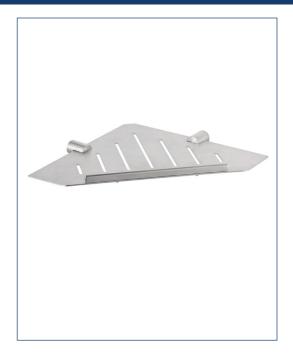

To Be Specified:


	MODEL NO.	DESCRIPTION	Length	Height	Depth
]	SSC-	Corner Shower Shelf	12 ¹ / ₄ "	²⁵ / ₃₂ "	7 ¹³ / ₃₂ "

TO ORDER add the finish code to end of model number

To Be Specified: Finish

Code	Finish
PC	Polished Chrome
BS	Brushed Stainless



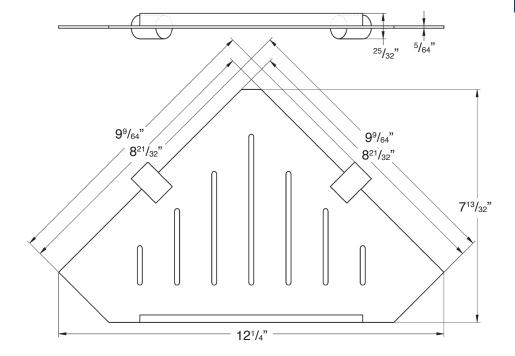

FEATURES

- Round style 6" tub spout with escutcheon
- Solid brass construction
- Size: 6" (161mm)
- 1/2" NPT male threads wall connection
- Lifetime Limited Residential / 1-Year Limited Commercial Warranty



Specified Model

	MODEL NO.	DESCRIPTION	LENGTH	WIDTH	SPOUT DIA
	SMRTS-	6" Tub Spout	6"	2-3/16"	1-1/4"

To Be Specified: Finish

PC Polished Chrome	
BN Brushed Nickel	
CB Champagne Bronze	
MB Matte Black	



Chrome



Brushed

Nickel





Champagne


Bronze



Matte Black



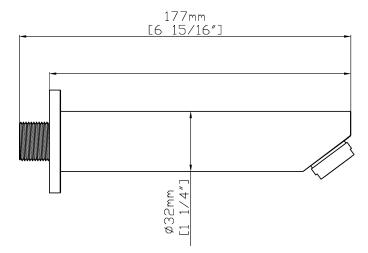



FEATURES

- Rowan round style 11-3/4" shower arm with escutcheon
- Solid brass construction
- Size:11-3/4" (300mm)
- 1/2" NPT male threads wall connection
- G 1/2" showerhead connection
- Lifetime Limited Residential /
 1-Year Limited Commercial Warranty




Specified Model

MODEL NO.	DESCRIPTION	LENGTH	WIDTH	HEIGHT
SMRSA12-	12" Shower Arm	11-3/4"	2-3/8"	3-3/8"

To Be Specified: Finish

PC Polished Chrome		
BN Brushed Nickel		
CB Champagne Bronze		
MB Matte Black		



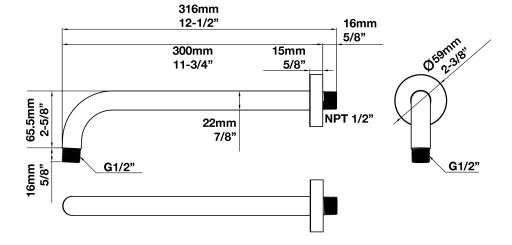

OPERATION

- Lever style handle with temperature indicator on the escutcheon
- Handle operates upward through a 23° arc. The rotation angle of temperature is 100°. Maximum hot through 50° in clockwise direction. Minimum cold through 50° in counterclockwise
- Adjustable temperature limit stop to control maximum hot water temperature
- •Pressure balancing mechanism maintains selected discharge temperature to ±3.6°F(±2°C)

FLOW

- Showerhead is limited to 2.5gpm(9.5L/min) at 80psi
- Bathtub spout is minimum to 2.4gpm(9.0L/min) at 20psi

CARTRIDGE


• Pressure Balance cartridge

STANDARDS

• Third party certified to meet ASME A112.18.1 all applicable requirements referenced therein





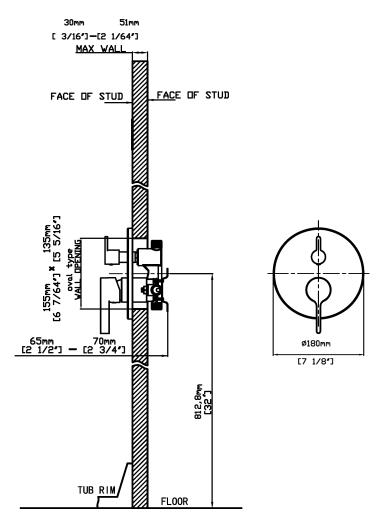

Note: Dimensions are for reference only. Detailed information is in accordance with the final product.

Single Function Showerhead

Features:

- ABS showerhead with metal connection.
- 8-11/16" round showerhead.
- Single rain function.
- 2.5gpm Neoperl restrictor.



Specified Model:

MODEL NO.	DESCRIPTION	Length	Width	Depth
SMMSHS8R	8-11/16" round showerhead	8-11/16"	8-11/16"	2-1/2"

To Be Specified:

FINISH	
PC Polished Chrome	
BS Brushed Stainless	
MB Matte Black	







