



CHROME ANGLE SUPPLY VALVES

Specifications for Valves

- Forged brass with high gloss polished chrome plated body
- Quarter turn open & shut
- Self-lubricating P.T.F.E. seats
- Double O-ring for more safety
- Suitable for both plumbing and hydronic heating application
- Complies with: ASME A112.18.1, CSA B125.1-11, F1807 PEX, NSF/ANSI Standard 21-2012, standard 14-212


Certified by

IAPMO (cUPC)

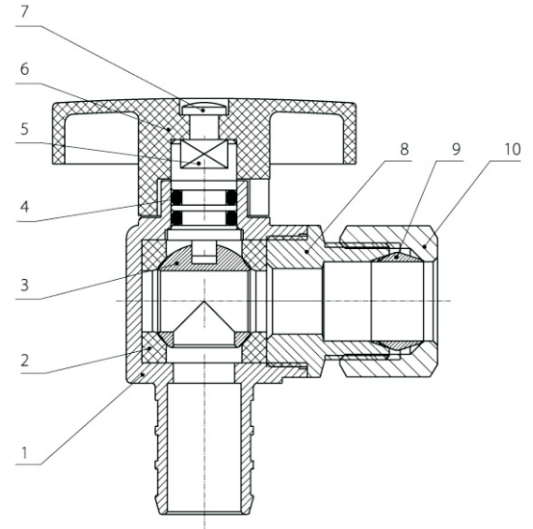


List of Materials


#	Part	Material	#	Part	Material
1	Body	C46500	6	Handle	ABS
2	Seat	PTFE	7	Screw	SS304
3	Ball	C46500	8	Bonnet	C46500
4	O-Ring	EPDM	9	Comp.Ring	Brass
5	Stem	C46500	10	Nut	C37700




09689	5/8" O.D. x 3/8" O.D.
-------	-----------------------




09639	1/2" PEX x 3/8" O.D.
09636	1/2" PEX x 1/4" O.D.




09629	1/2" EXP. x 3/8" O.D.
-------	-----------------------




09615	3/8" FIPS x 3/8" O.D.
09617	1/2" FIPS x 3/8" O.D.




09619	1/2" COP x 3/8" O.D.
-------	----------------------



38989	1/2" P.F. x 3/8" O.D.
-------	-----------------------




CHROME ANGLE SUPPLY VALVES



38909

1/2" P.F. x P.F.

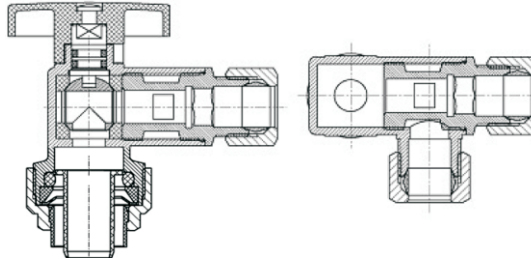

38919


1/2" P.F. x 3/8" O.D. (2x)

CHROME ANGLE SUPPLY VALVES WITH HAMMER ARRESTER

Specifications for Valves with Hammer Arrestor


- Forged brass with high gloss polished total chrome plated
- Quarter turn open & shut
- Self-lubricating P.T.F.E. seats
- Double O-ring for more safety
- Piston type (permanently sealed chamber) arrester
- Copper body and brass cap, brass piston, AA size
- Maximum Temperature: 212 °F (100 °C)
- Maximum Pressure: 250 psi (17.5 kgf/cm²)
- Absorptive Capacity: 150 psi (10.5 kgf/cm²)
- Complies with: ASME A112.18.1, CSA B125.1-11, F1807 PEX, NSF/ANSI Standard 21-2012, standard 14-212, PDI WH201, ASSE 1010

Certified by
IAPMO (cUPC)

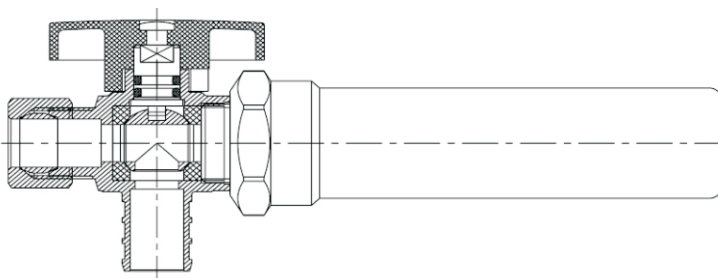


31249

1/2" PEX x 3/8" O.D.

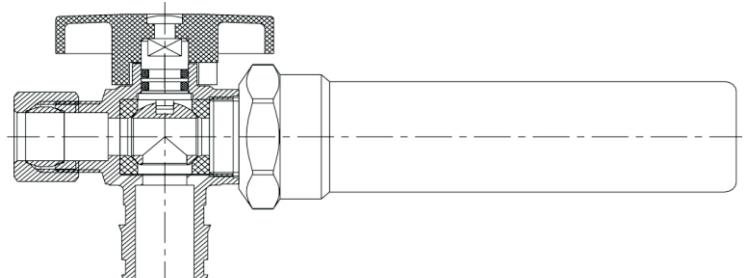

31259

1/2" EXP. x 3/8" O.D.





CHROME STRAIGHT SUPPLY VALVES

Specifications for Valves


- Forged brass with high gloss polished chrome plated body
- Quarter turn open & shut
- Self-lubricating P.T.F.E. seats
- Double O-ring for more safety
- Suitable for both plumbing and hydronic heating application
- Complies with: ASME A112.18.1, CSA B125.1-11, F1807 PEX, NSF/ANSI Standard 21-2012, standard 14-212

Certified by
IAPMO (cUPC)

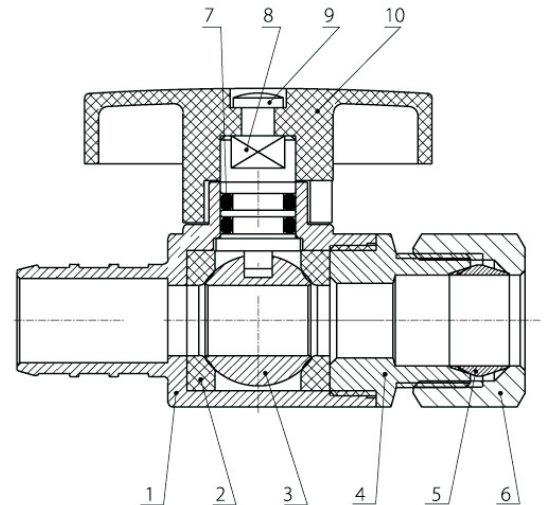


List of Materials


#	Part	Material	#	Part	Material
1	Body	C46500	6	Nut	C37700
2	Seat	PTFE	7	O-Ring	EPDM
3	Ball	C46500	8	Stem	C46500
4	Bonnet	C46500	9	Screw	SS304
5	Comp.Ring	Brass	10	Handle	ABS




09684	5/8" O.D. x 3/8" O.D.
-------	-----------------------




09634	1/2" PEX x 3/8" O.D.
09637	1/2" PEX x 1/4" O.D.

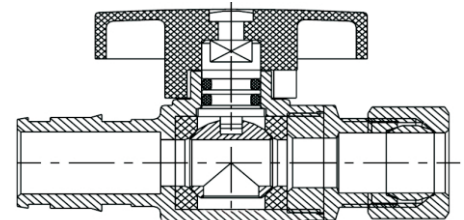


09624	1/2" EXP. x 3/8" O.D.
-------	-----------------------




09610	3/8" FIPS x 3/8" O.D.
09612	1/2" FIPS x 3/8" O.D.




09614	1/2" COP x 3/8" O.D.
-------	----------------------

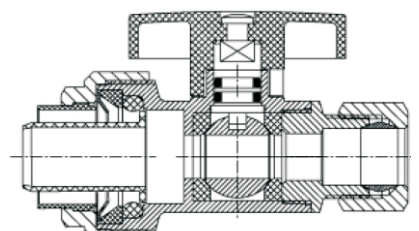

38984	1/2" P.F. x 3/8" O.D.
-------	-----------------------




CHROME STRAIGHT SUPPLY VALVES

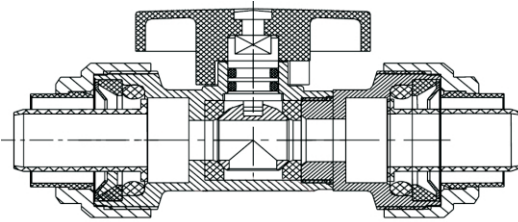

38904

1/2" P.F. x P.F.

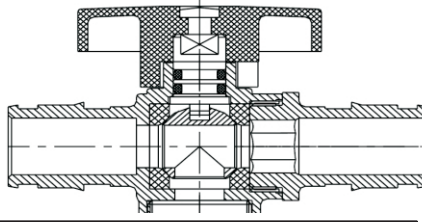


09104

1/2" EXP. x EXP.

09105

3/4" EXP. x EXP.

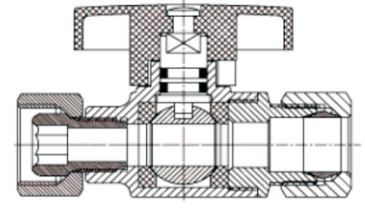

09620


3/8" REV. x 3/8" O.D.

CHROME STRAIGHT SUPPLY VALVES WITH HAMMER ARRESTER

Specifications for Valves with Hammer Arrester


- Forged brass with high gloss polished total chrome plated
- Quarter turn open & shut
- Self-lubricating P.T.F.E. seats
- Double O-ring for more safety
- Piston type (permanently sealed chamber) arrester
- Copper body and brass cap, brass piston, AA size
- Maximum Temperature: 212 °F (100 °C)
- Maximum Pressure: 250 psi (17.5 kgf/cm²)
- Absorptive Capacity: 150 psi (10.5 kgf/cm²)
- Complies with: ASME A112.18.1, CSA B125.1-11, F1807 PEX, NSF/ANSI Standard 21-2012, standard 14-212, PDI WH201, ASSE 1010

Certified by
IAPMO (cUPC)

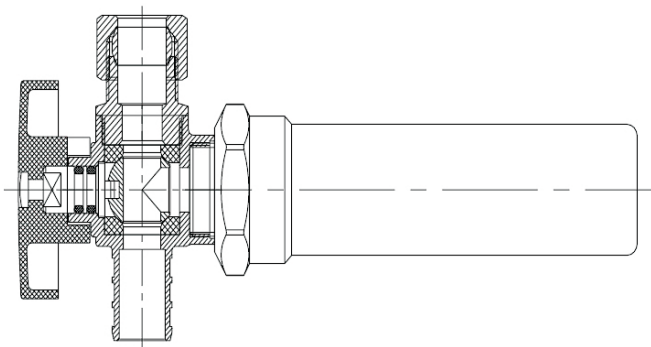

31248

1/2" PEX x 3/8" O.D.

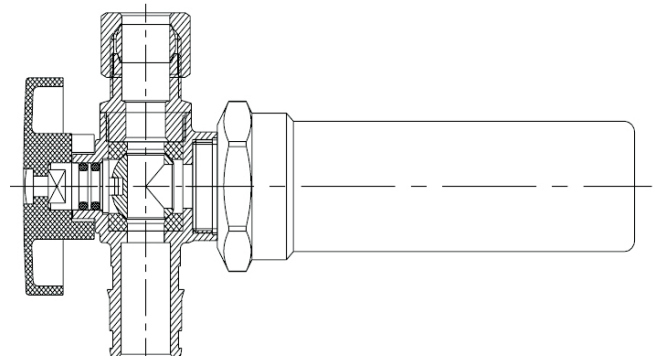

31258

1/2" EXP. x 3/8" O.D.