

Terra Collection

60" Terra Ceiling Fan NI

330249NI (Brushed Nickel)

Project Name: _____

Location: _____


Type: _____

Qty: _____

Comments: _____



Dimensions

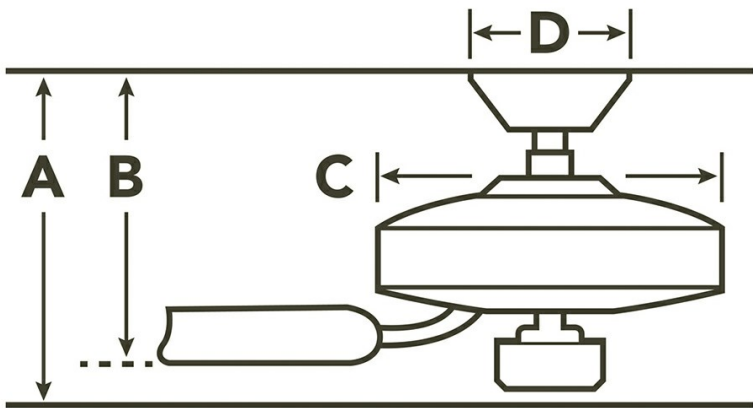

Downrod	A	B	C	D
1.00 OD X 4.50	14.00	12.00	12.60	6.70

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
--------	---------	-------	---------	---------

Product Information

Product ID	330249NI
Finish	Brushed Nickel
Blade Finish	Silver/Walnut
Collection	Terra Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
Low	135	7009	95	.62	74
Med	103	4867	126	.47	39
High	67	2801	206	.34	14

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	60"
Blades Reversible	No
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	Yes, With Optional Flush Mount
Lead Wire Length	78.00"
Motor Size	188MM X 25MM
Motor Type	AC

Safety Listings & Certifications

Safety Rated	Dry
Energy Star	Yes
Warranty	www.kichler.com/warranty

Installation

Installation requirements

The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL listed electrical

Terra Collection
60" Terra Ceiling Fan NI
330249NI (Brushed Nickel)

Project Name: _____
Location: _____
Type: _____
Qty: _____
Comments: _____

Burnished Antique Pewter	330249BAP		DARK CHERRY	WETHRD WHT WLNT
Matte White	330249MWH		MATTE WHITE	WETHRD WHT WLNT
Brushed Nickel	330249NI		SILVER	WALNUT
Oil Brushed Bronze	330249OBB		WALNUT	CHERRY

	junction boxes marked "For Fan Support"
Electrical Requirements	120V 60Hz AC
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Control Options

Product ID	Descr
337001WH	Universal Remote Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
370040	4 Speed Rotary Switch 10 AMP