



# Valton®

## Two-piece elongated toilet

### 402312

#### Features

- Two-piece design
- Elongated bowl offers added room and comfort
- 1.28 gpf (4.8 lpf)
- Color-matched left-hand white trip lever included
- 2" (51 mm) fully glazed trapway
- Combination consists of the 403378 bowl and 404501 tank
- Pro Force® Plus flushing technology delivers greater flushing power than previous Pro Force® models

#### Installation

- Standard 12" (305 mm) rough-in
- Three-bolt quick-connect installation
- Seat and supply line sold separately

#### Recommended Products/Accessories

K-20110 Brevia™ Quiet-Close™ elongated toilet seat  
K-5420 Low-Profile Bolt Caps  
K-23726 Drain treatment

#### Included Components

403378 Elongated toilet bowl  
404501 1.28 gpf toilet tank



#### Codes/Standards

ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
IAPMO Certification


#### STERLING® Toilet Limited Warranty


See website for detailed warranty information.

#### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	0	White
---	---	-------

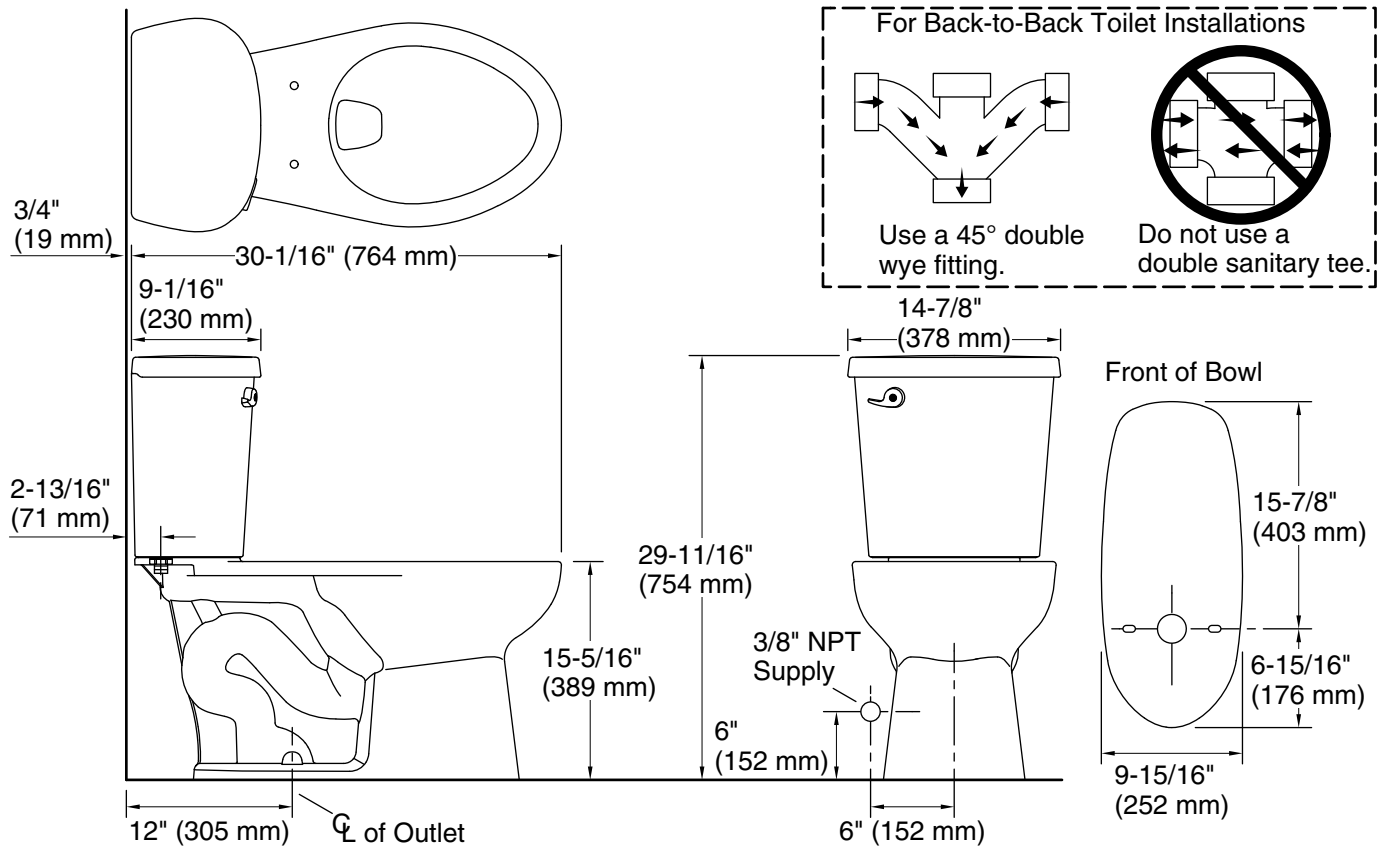

### Technical Information

All product dimensions are nominal.

Toilet type: Floor-mount  
Waste Outlet: Floor  
Bowl shape: Elongated  
Flush type: Gravity siphon jet  
Rough-in: 12" (305 mm)

### Fixture Supply Requirements

Min static pressure: 15 psi (103.4 kPa)  
Max static pressure: 80 psi (551.6 kPa)

### Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.