


CROSS SECTION OF THRESHOLD

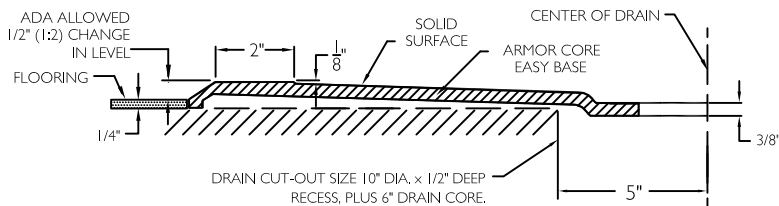

SUBMITTAL

This shower enclosure shall be model SSS 6233 BF-F .75, left or right. Finished surface shall be of a sanitary grade solid surface exhibiting a minimal thickness of 55 dry mills and a finished Barcoal hardness of 80-90 as tested with ASTM D-2583.

Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 62" x 32 3/4" x 78 1/2". The unit shall meet CSA B45.5-11, HUD-UM73, ADA, ANSI A117.1, MAS, and Home Innovation Research Lab.

HANDED BY THE SEAT

The enclosure shall be equipped with the following accessories:

- 1) One 36" x 1 1/2" diameter stainless steel peened horizontal grab bar on the back wall,
- 2) One 22" x 1 1/2" diameter stainless steel peened horizontal grab bar on the side wall, both with 1 1/2" statute clearance, mounted with stainless steel bolts, and secured from the rear with 3" x 3" x 11 gauge metal mounting plates,
- 3) 26" x 21" white frameless padded fold up seat,
- 4) One inch diameter, 18 gauge stainless steel curtain rod with receiver cups,
- 5) Tri-Cell backing on all walls,
- 6) Armor Core Easy Base,
- 7) 3/4" COL threshold.

OPTIONAL ACCESSORIES:

Factory Plumbing Install Option: ☐ YES ☐ NO

☐ PB Pressure Balancing Mixing Valve (ADA / ANSI)

☐ HH Hand held shower assembly with slide bar, vacuum breaker and 60" hose (ADA / ANSI)

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 62" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALLOW BOLT CLEARANCE FOR A DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSURE.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR.

Job Name	Approved By Print Name	Date	COMFORT DESIGNS	
Project No	Approved By Signature		Model No. SSS 6233 BF-F COL .75 L-Bar MAS-I	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Architect		Drawing No. SSS 6233 BF-F COL .75 PHBW PHSW FPD CR Tri-Cell Easy Base	
	Engineer		Date Issued. 4-3-12	Drawing Rev. 11-1-17
	Rep		Material. Solid Surface	
	Wholesaler		Color.	
	Comments		Dimensions are in inches. Due to the nature of the materials dimensions may vary \pm 1/2"	