


TOP VIEW



* Dimension includes I/4" top perimeter flange.

SUBMITTAL

This shower enclosure shall be model SSB 3838 ANSI Type B, FHA Specification B Pan with center drain. Finished surface shall be of a sanitary grade solid surface exhibiting a minimal thickness of 55 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of $38" \times 38" \times 4$ 3/4".

The unit shall meet ANSI Z124.1-2, BOCA, UPC, CSA, Home Innovation Research Lab, ANSI Type B, FHA Specification B, and meet the requirements of the Southern Building Code.


HANDED BY THE CENTER DRAIN

The enclosure shall be equipped with the following features:


- I) Solid Surface,
- 2) Center Drain Location,
- 3) 3/4" High Perimeter Mounting Flange, 1/4" Or 1/2" Wide,
- 4) No recessed flanges,
- 5) Finish surface on side at front (see detail below),
- 6) 4.0" Threshold.


Note: Unit available with 1/4" or 1/2" wide top perimeter flange.

FRONT VIEW



SIDE VIEW



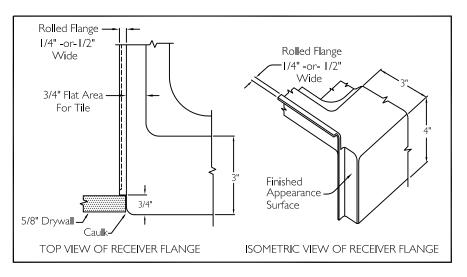

THIS UNIT FEATURES THE OUTSIDE DIMENSIONS OF 38" BY 38". THE 38" WIDTH DIMENSION INCLUDES THE .25" ROLLED TOP FLANGE ON EACH SIDE. FRAMING WIDTH MUST BE AT LEAST 38 1/4" WIDE. SEE PAGE 2 FOR FRAMING DETAILS. FINISHED WALLS ABOVE THE SHOWER BASE BY OTHERS.

Job Name	Approved By Print Name		Date	COMFORT DESIGNS	
Project No	Approved By Signature			Model No. SSB 3838 4.0 ANSI Type B-FHA Spec B Pan-I No RRF	
Comfort Designs	Architect			Drawing No. SSB 3838 4.0 ANSI Type B-FHA Spec B Pan-1 No RRF	
435 Industrial Road	Engineer			Date Issued. 5-7-12	Drawing Rev. I-16-17
Savannah, TN 38372	Rep			Material Solid Surface	
tel 800.443.7269	Wholesaler			Color.	
fax 731.925.4290 www.comfortdesignsbathware.com	Comments	Comments		Dimensions are in inches. Due to the nature of the materials dimensions may vary \pm 1/2"	





FRAMING DETALS

SSB 3838 ANSI Type B - FHA Spec B Pan.

TOP VIEW

DETAIL OF FLANGE FRAMING






3838 ANSI Type B - FHA Spec B Shower is available in these configurations:

With 1/4" wide horizontal perimeter flange and no recessed flanges. With 1/2" wide horizontal perimeter flange and no recessed flanges.

Refer to framing diagrams and dimensional matrix below for proper framing enclosure size.



FRAMING WITHOUT RECESSED FLANGES

With I/4" Perimeter Flange

With I/2" Perimeter Flange

Α	В	C	D	
38 1/4"	37 1/4"	19 1/8"	18"	

Α	В	С	D	
38 3/4"	37 1/2"	19 3/8"	18 1/4"	

Job Name	Approved By Print Name		Date	COMFORT DESIGNS		
Project No	Approved By Signature			Model No. SSB 3838 4.0 ANSI Type B-FHA Spec B Pan-I No RRF		
Comfort Designs	Architect			Drawing No. SSB 3838 4.0 ANSI Type B-FHA Spec B Pan-I No RRF		
435 Industrial Road	Engineer			Date Issued. 5-7-12	Drawing Rev. I-16-17	
Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Rep			Material Solid Surface		
	Wholesaler			Color.		
	Comments		Dimensions are in inches. Due to the nature of the materials dimensions may vary \pm 1/2"			