

Installation Manual

Montageanleitung
Instructions de montage
Istruzioni per il montaggio

**KNOW
HOW**
INSTALLED

Product Data

Product Specifications

Geberit Model No. 131.028.xx.1

Features

- Water consumption: Dual flush system allows for 0.8 GPF (3 l) or 1.6 GPF (6 l)
- Impact resistant high density polyethylene tank HDPE
- Anti-siphon fill valve meets ANSI / ASSE 1002-99 standard

Material Determination


Recommended material for wall surface construction (2 x 1/2" or 2 x 3/8"):

- Gypsum / green board
- Cement board
- Tile backer board
- Ceramic tile surface

Warranty

Limited lifetime warranty on tank and carrier.
10 year warranty on fill valve and flush valve.

Installation

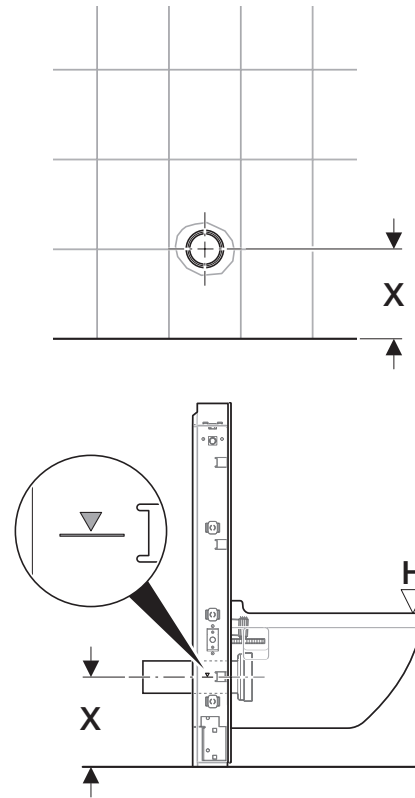


Seat Height	~Rim Height H	X
17.25	16.13	9.00
17.50	16.38	9.25
18.00	16.88	9.75
18.50	17.38	10.25
18.75	17.63	10.50


Installation Requirements

To install Geberit Monolith, a 2 x 6" or 2 x 4" wood frame or metal frame construction is required. Studs must be placed where Geberit Monolith will be positioned.


Drainage elbow installation

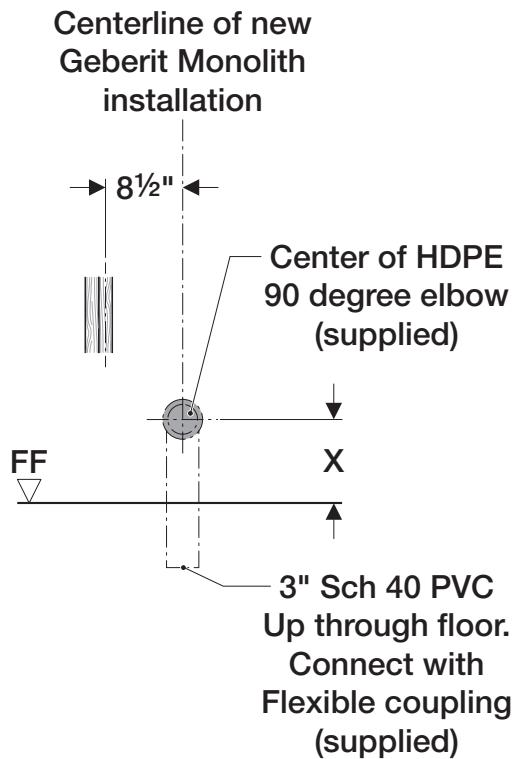

Top view 2 x 4 wall

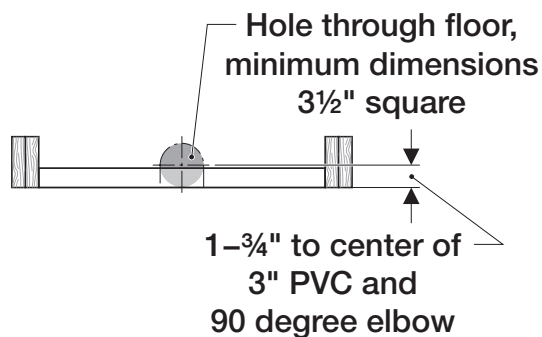

Top view 2 x 6 wall

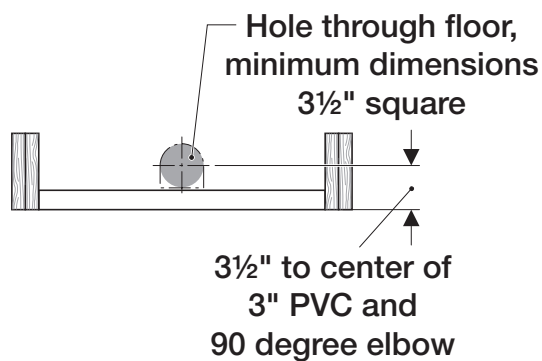


Install protection plug (yellow)

Water supply installation


1

Stub out water supply line. Angle stop valve to be installed later.


Top view

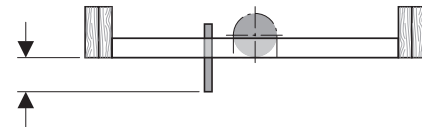

Front view

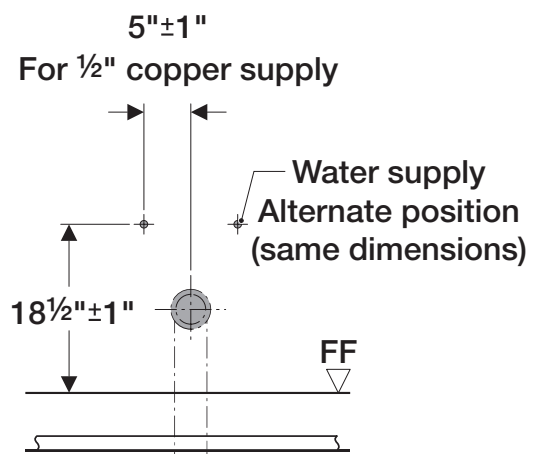


Frame installation

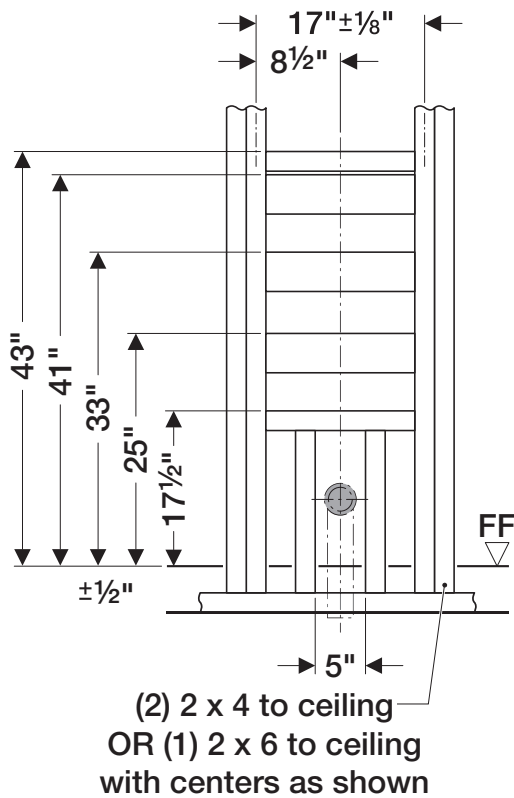

- ▶ Strap drainage elbow to studs to prevent from falling back into wall.

1 Finish wall surface construction.

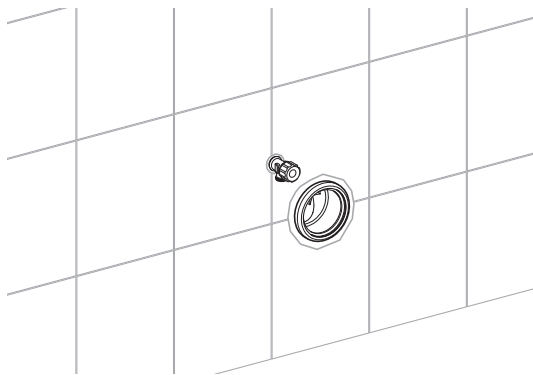


2 Attach supplied angle valve.

- i** Outlet of valve must point to 6 o'clock position!


Option 1: Tile wall see page 4
Option 2: Painted wall see page 6

Option 1: Tile wall


1

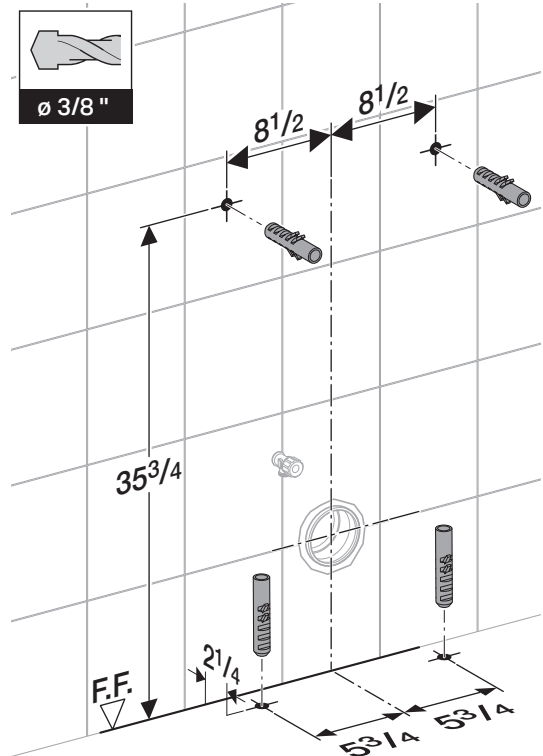


2

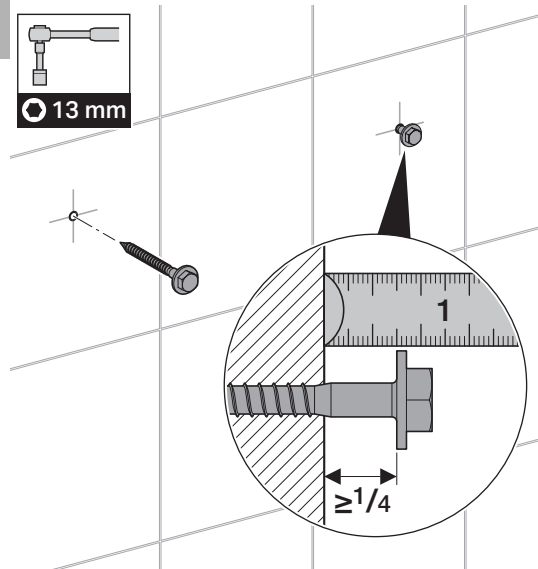

3

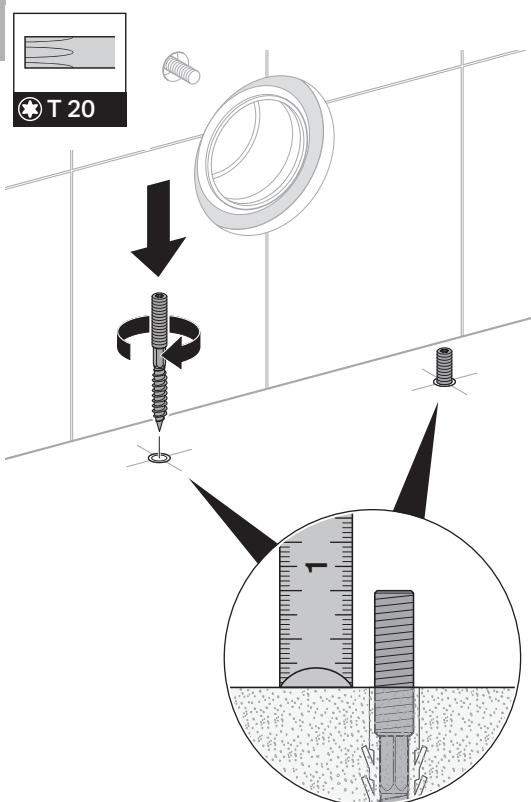


4

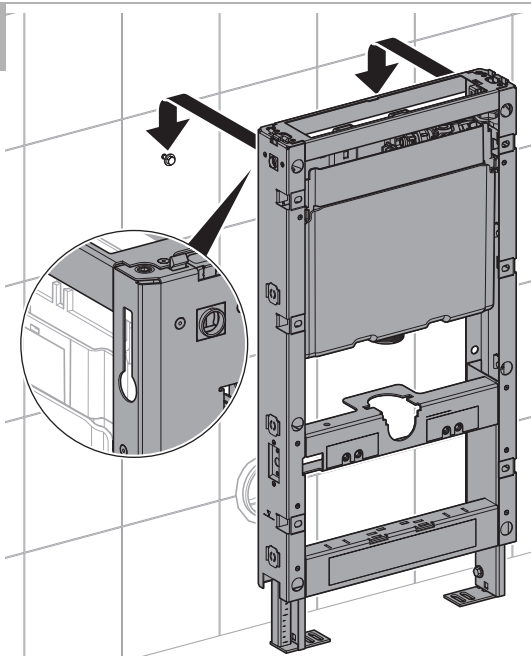


i

Be sure this mark is lined up at elevation "X". It should also be equal to center of drainage elbow.

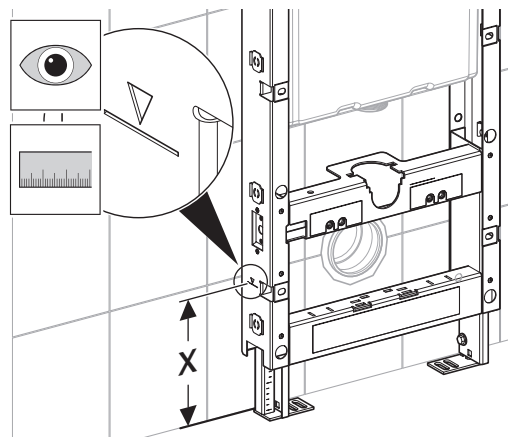

5



Fine leveling adjustment. Raise or lower sides as needed.

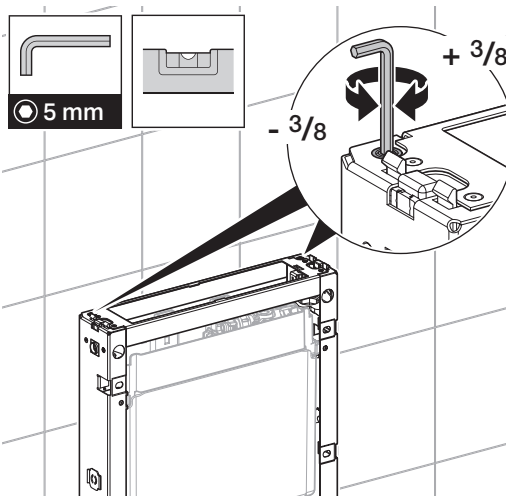



CAUTION

► Do not overtighten.

6

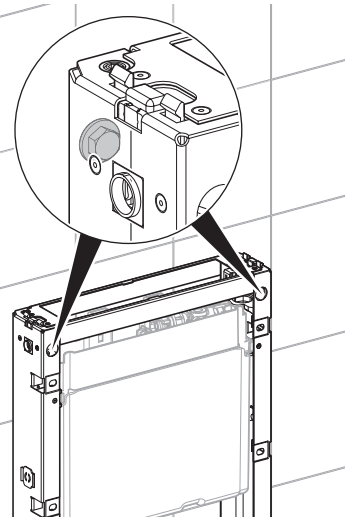




7

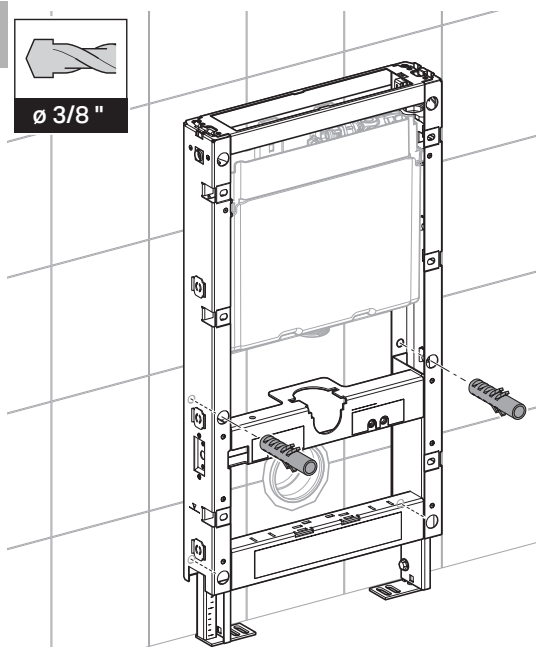

CAUTION

► Do not overtighten.


8

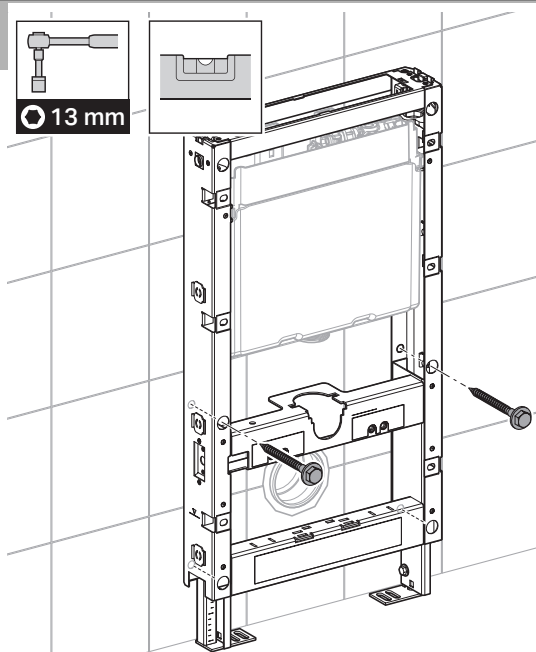



To complete the installation continue on page 8.

Option 2: Painted wall


1

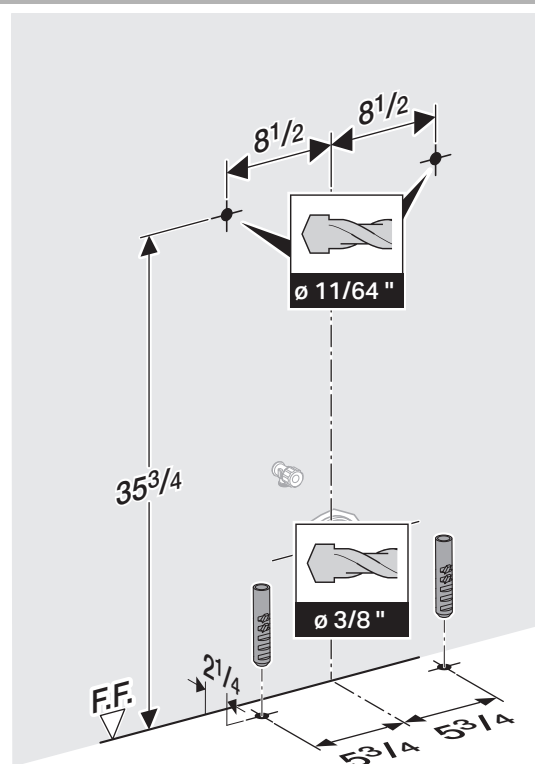


2

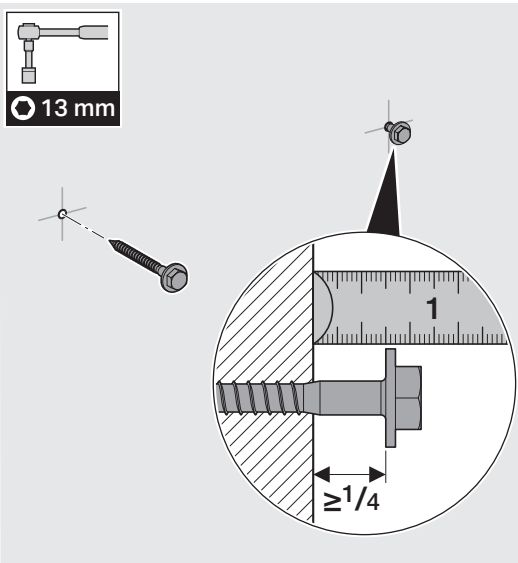

3

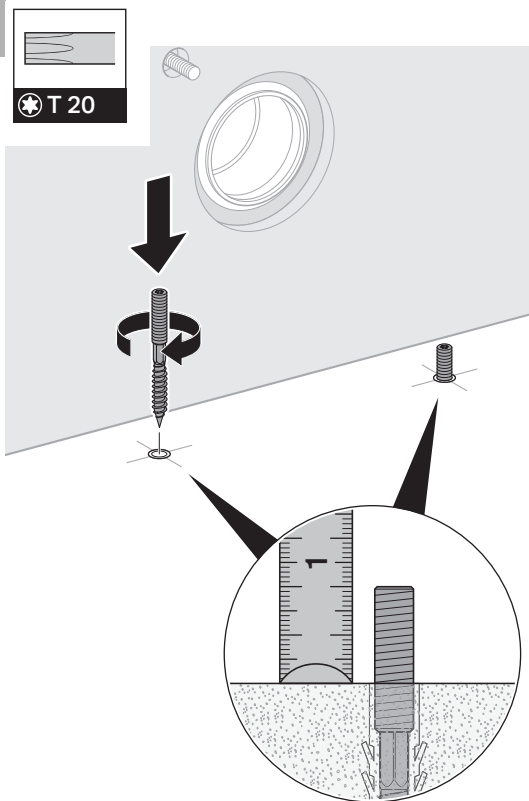


4

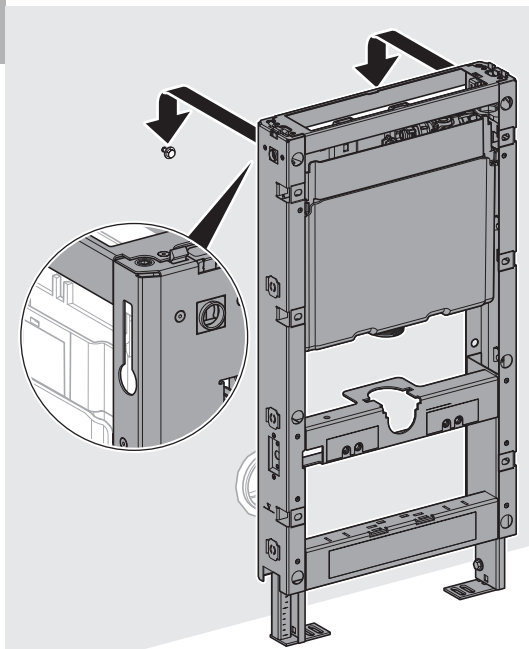


i

Be sure this mark is lined up at elevation "X".
It should also be equal to center of drainage elbow.

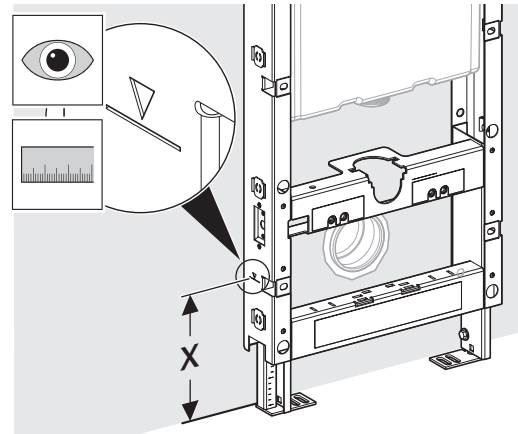

5


Fine leveling adjustment. Raise or lower sides as needed.

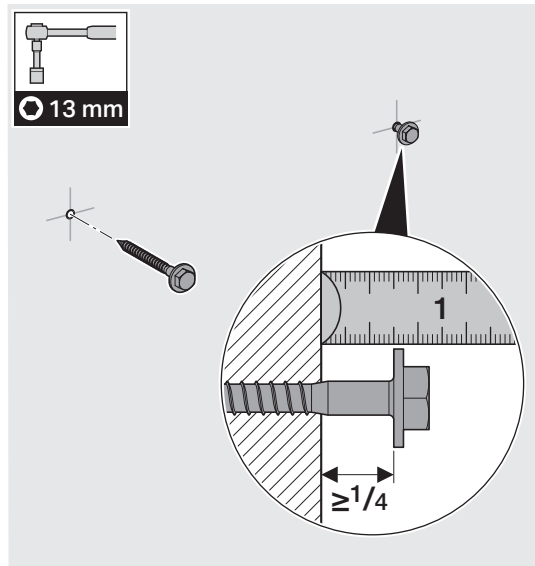


CAUTION

► Do not overtighten.

6

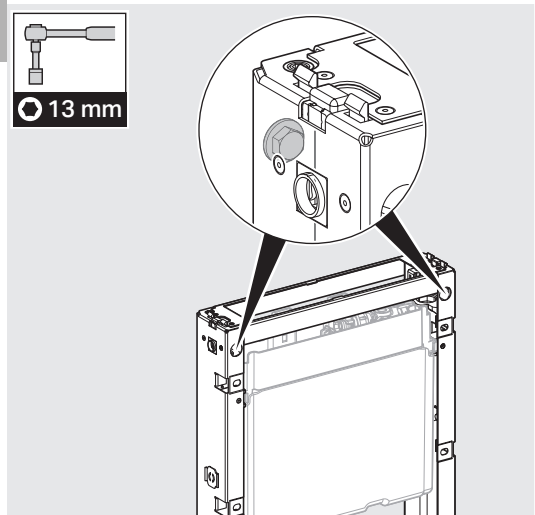



7

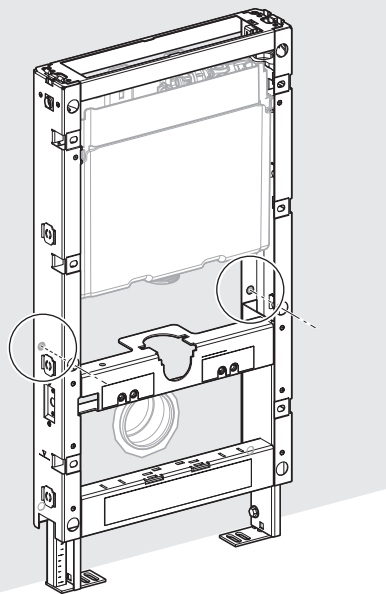

CAUTION

► Do not overtighten.

8

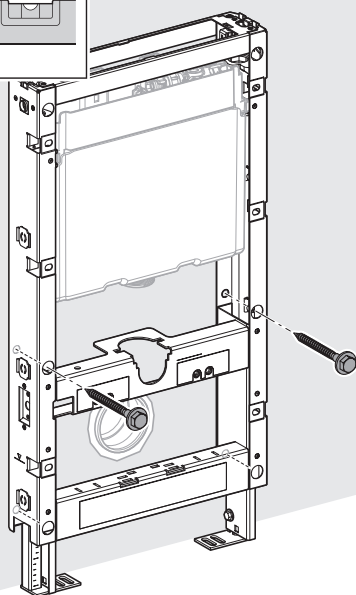




Common installation steps (tile and painted wall)



CAUTION

► Do not overtighten.




1

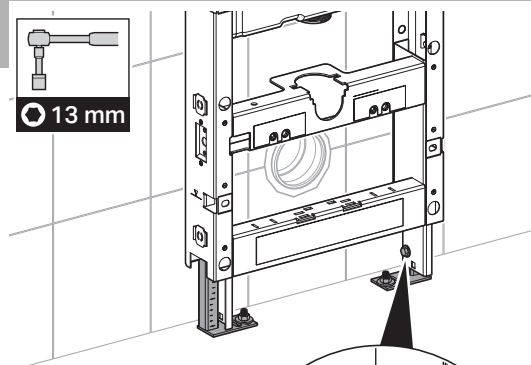


CAUTION

► Do not overtighten.


2

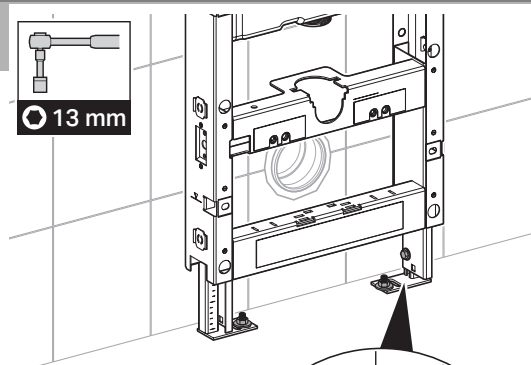


3

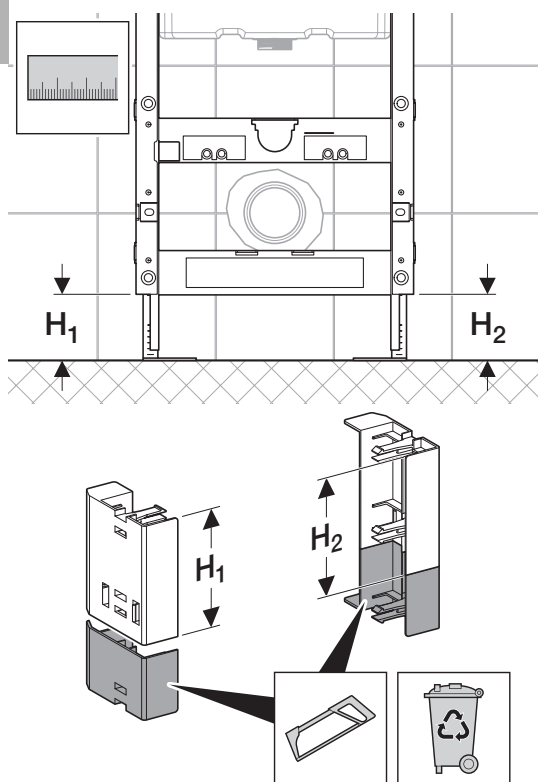

4

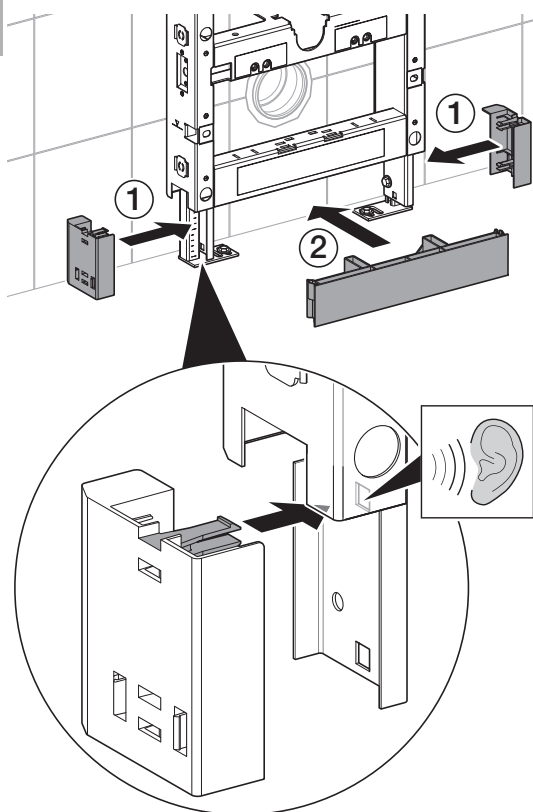

5

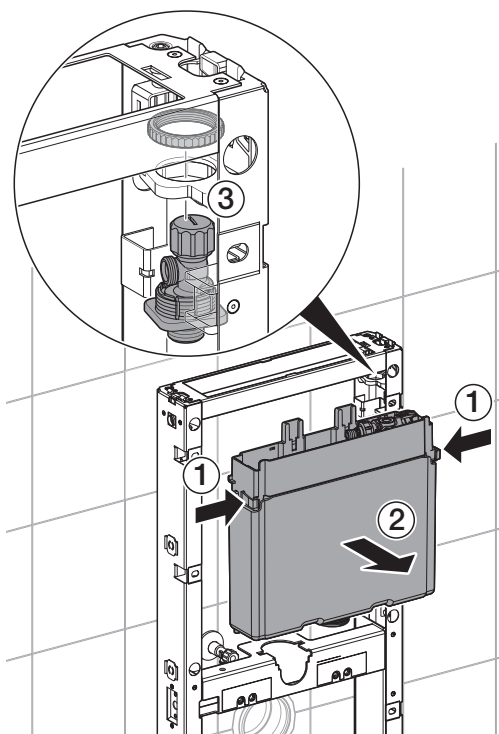




CAUTION







► Do not forget sealing washer.

6

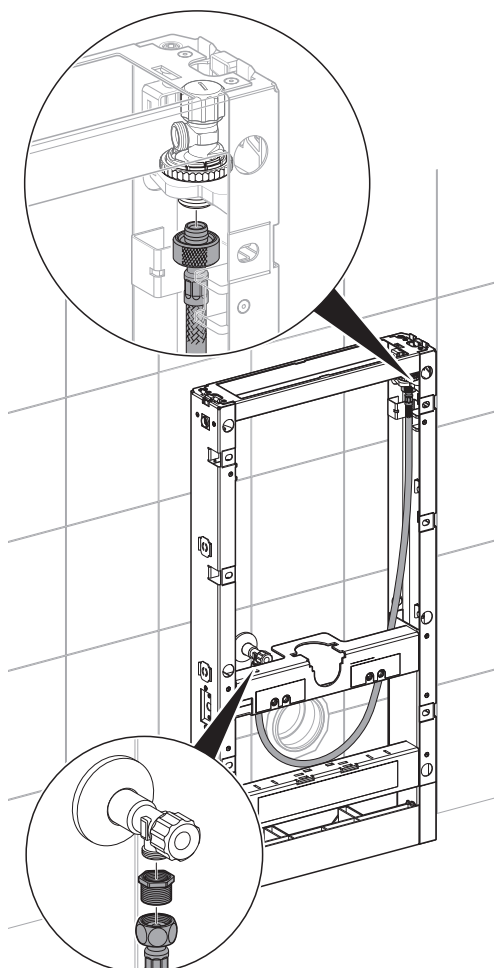


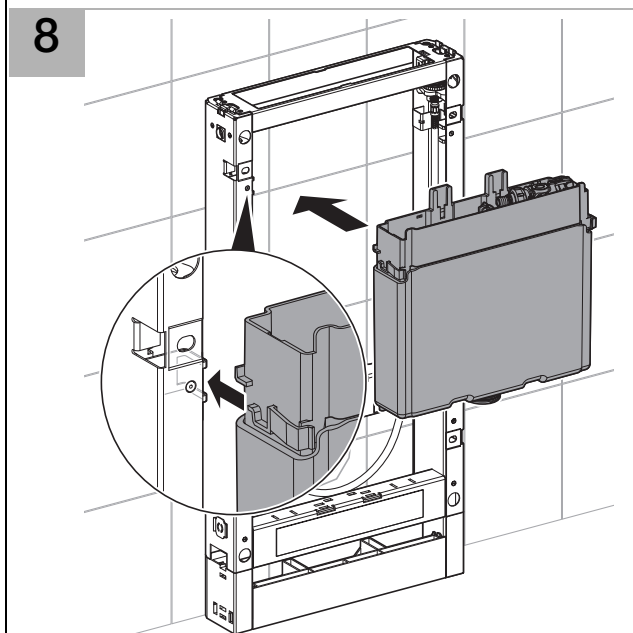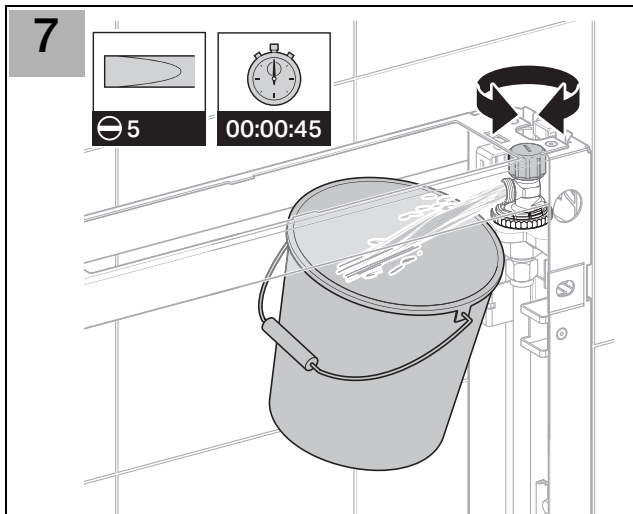


i For water supply on right, filling valve can remain in position as supplied.
For water supply on left, filling valve must be repositioned (see next steps).

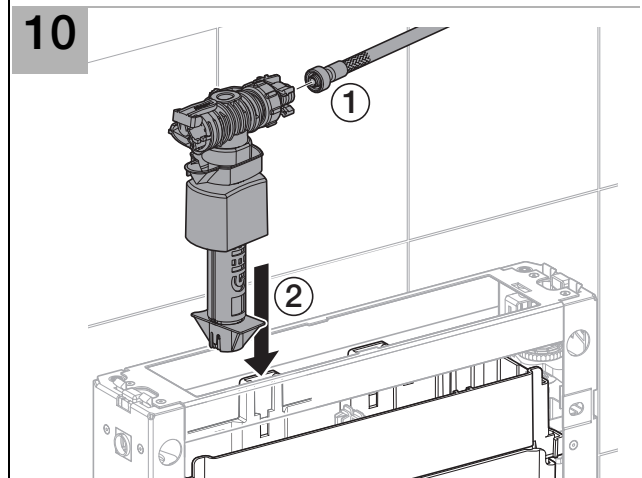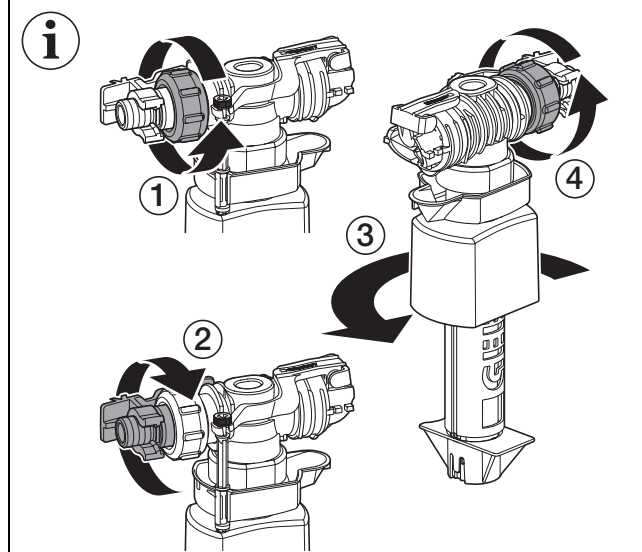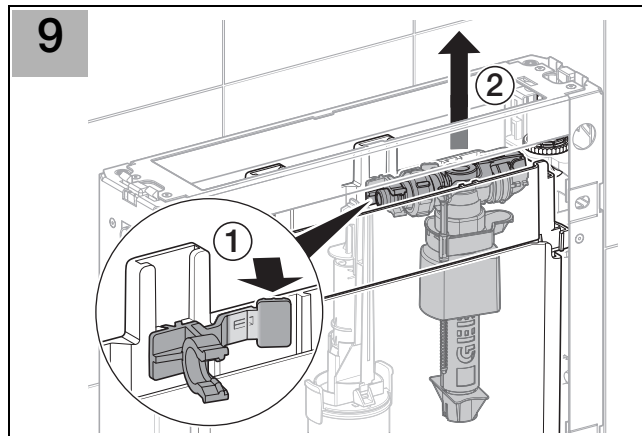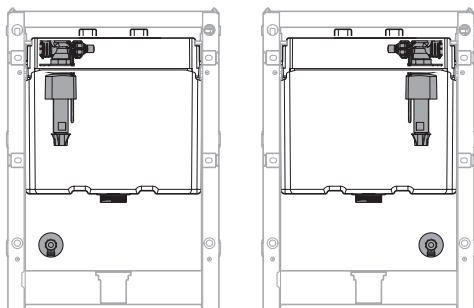



11

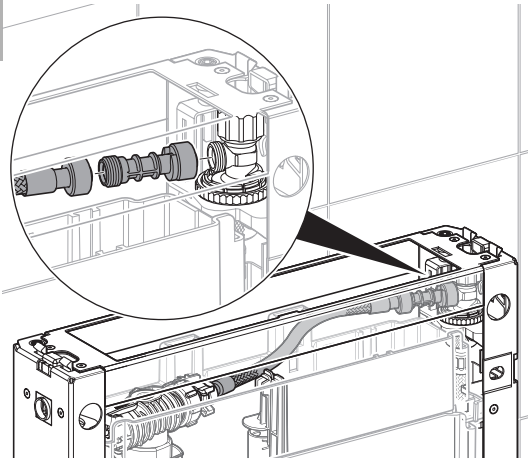


12



Use ceramic or data sheet to find dimension T1.

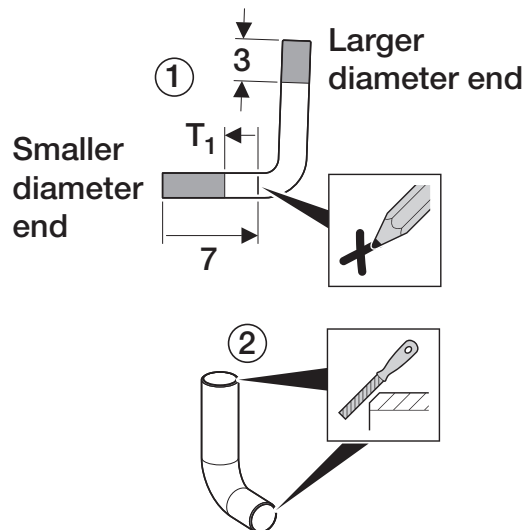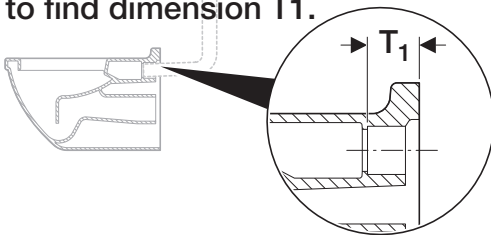


13

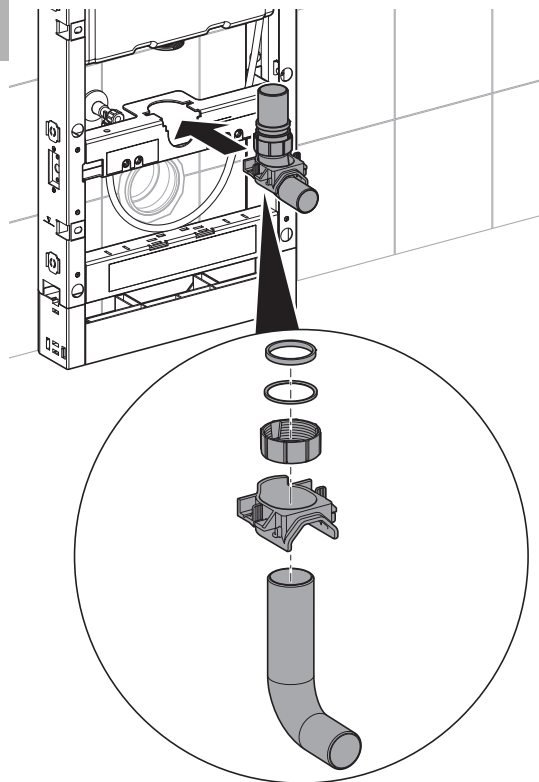

14

Hand tight + 1/4 turn.

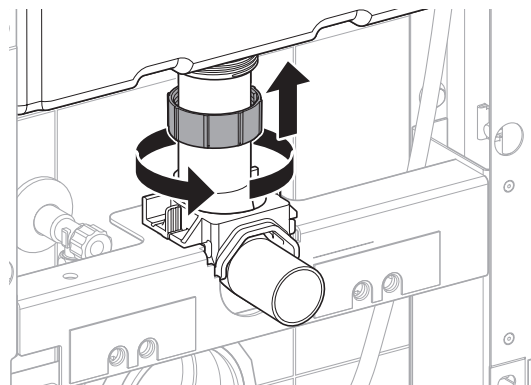





CAUTION

- Check that inserts are fully unlocked before inserting into Geberit Monolith.

15




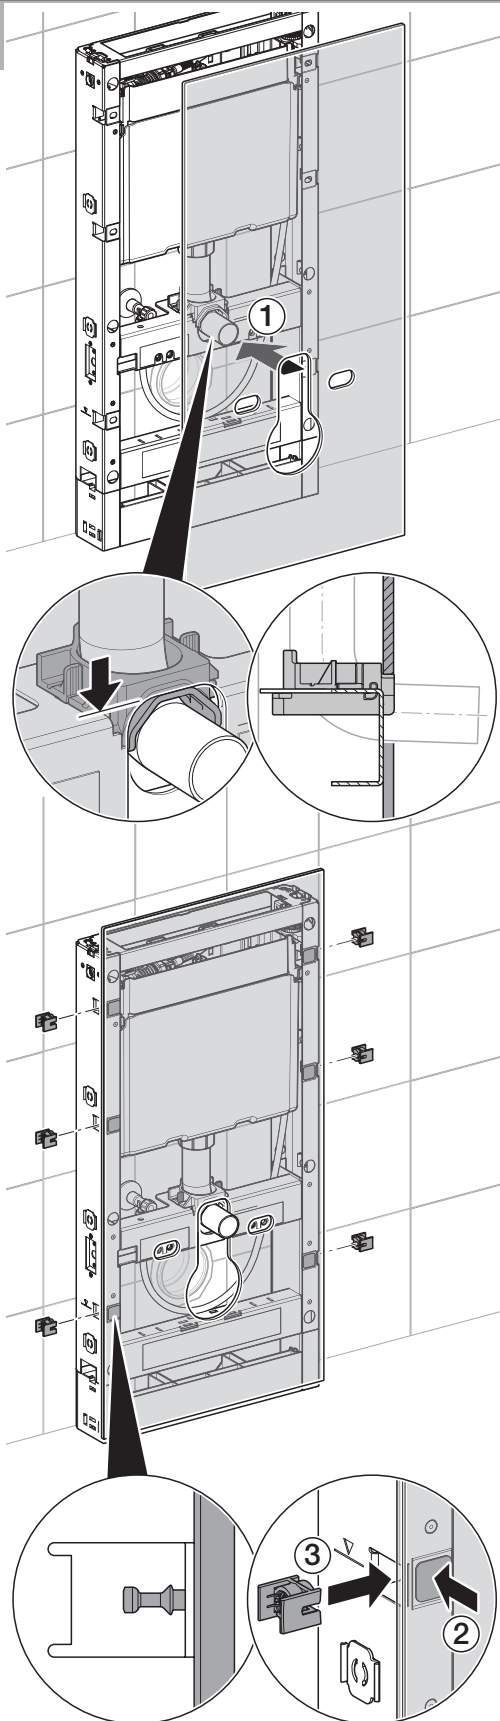


16

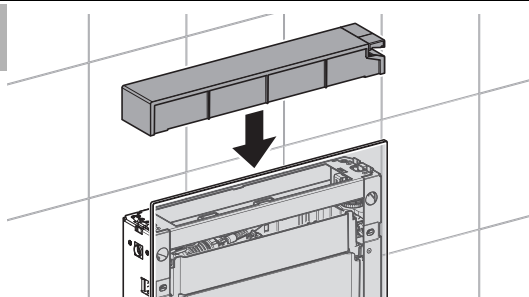


17


Glass must have even offset all around.

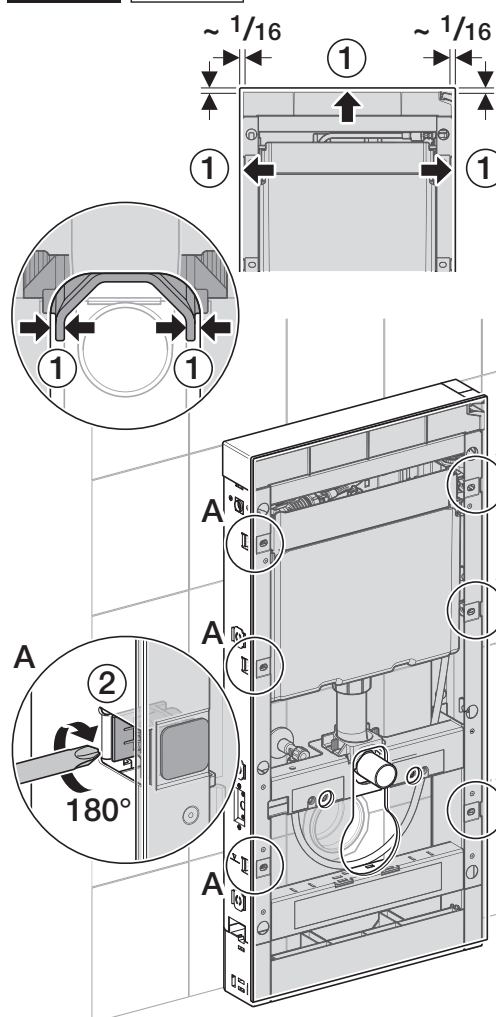


18

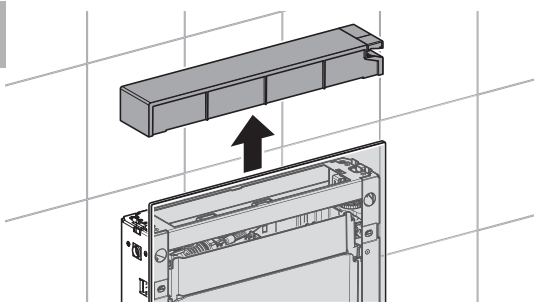


19

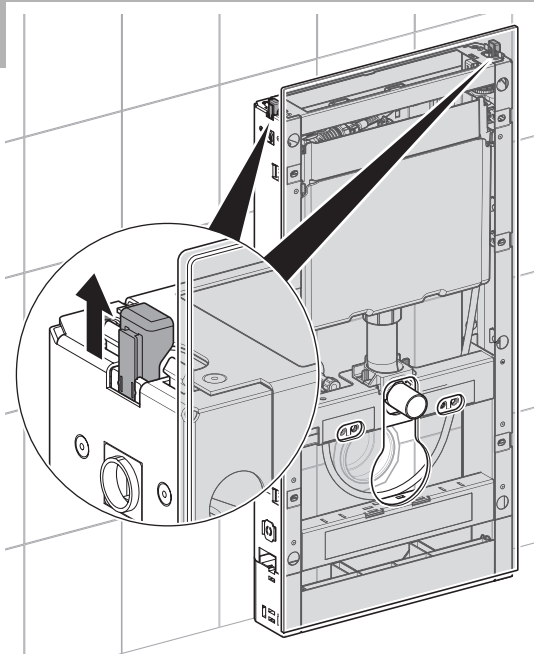


20

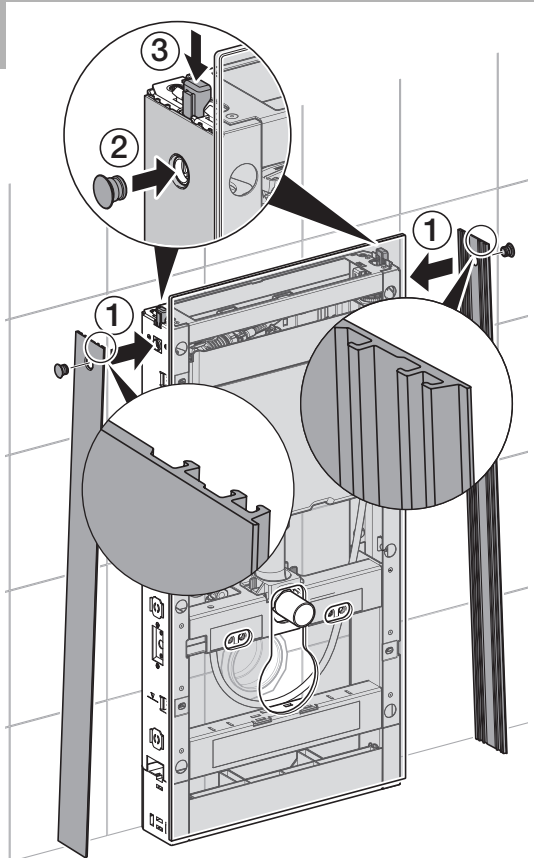

21

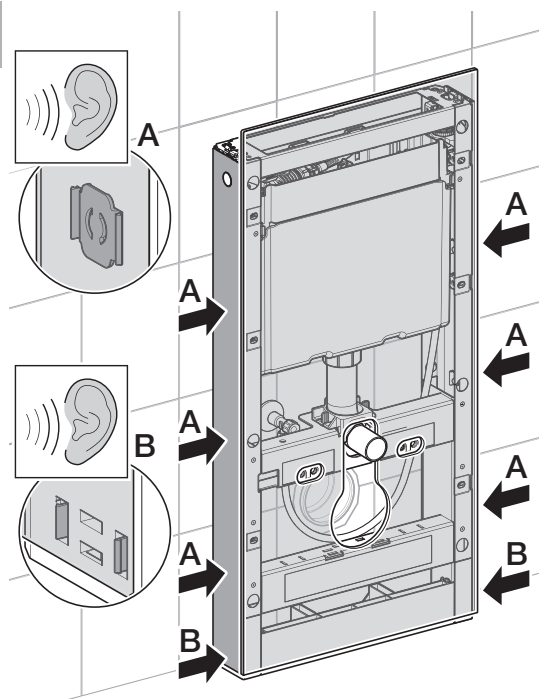


22

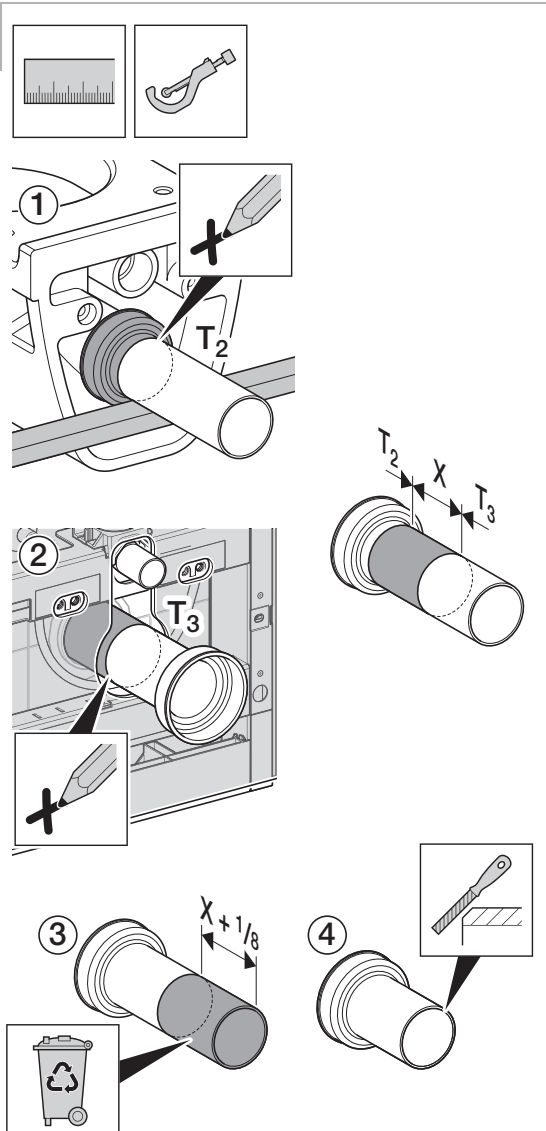



23




24

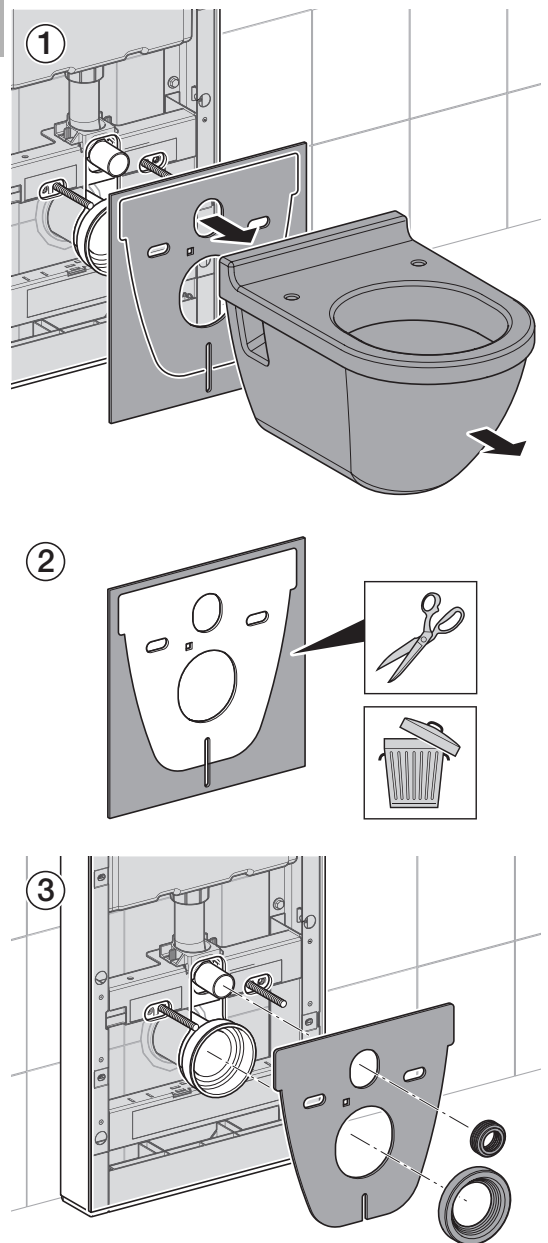


25

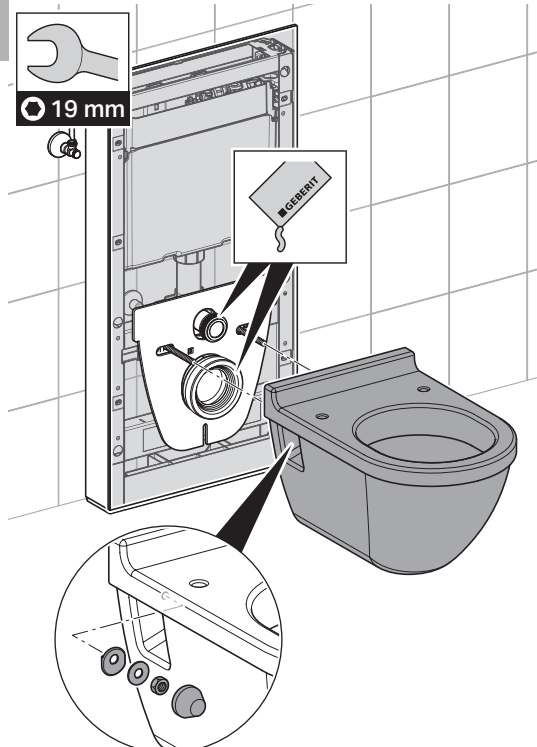



26

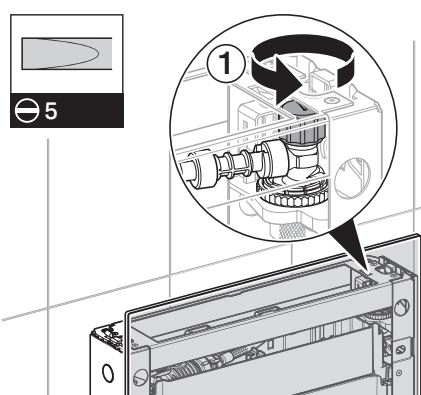


27

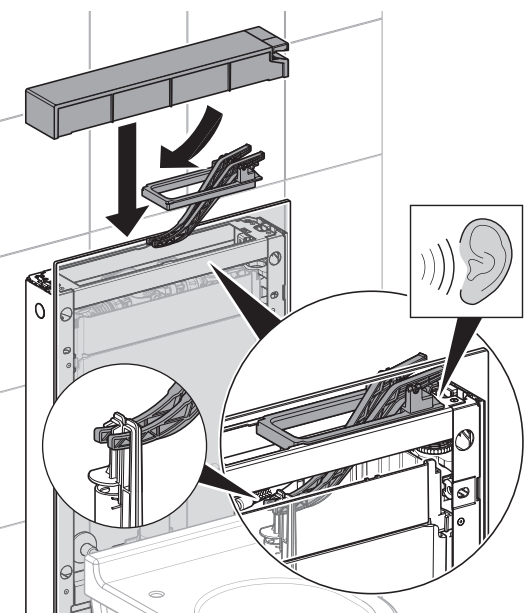

28

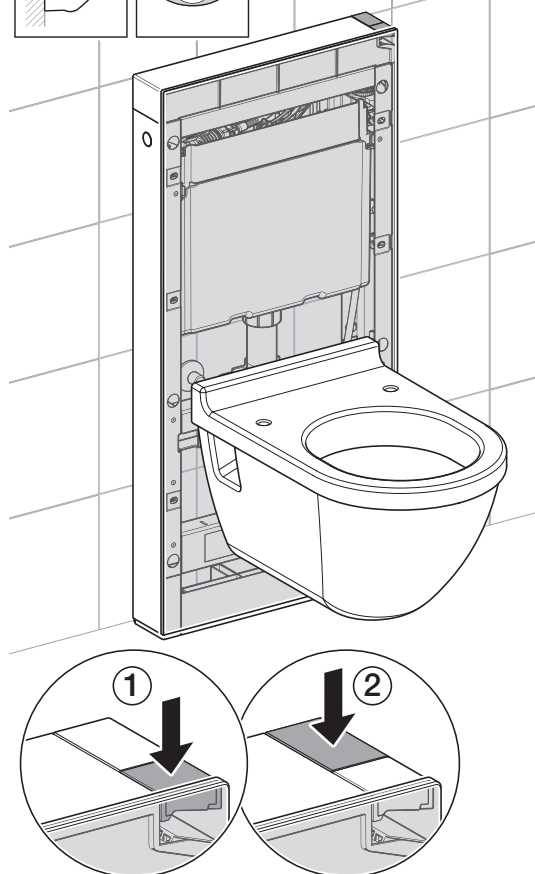

29

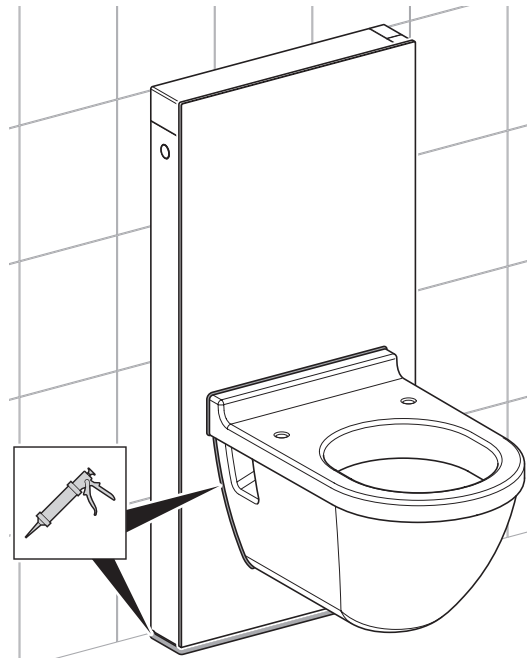

Geberit
2100 Clearwater Drive, Des Plaines,
IL 60018-5999

Phone: (847) 803 5000 • Fax: 847/803-5454
For Technical Assistance 800 / TEC-TRUE (800-832-8783)

→ www.geberit.us

Geberit International AG
Schachenstrasse 77
CH-8645 Jona

dokumentation@geberit.com

→ www.geberit.com