

Features

- Fixture-mount design.
- Includes a 9V lithium battery.

Material

- Brass construction.

Technology

- Electronic infrared sensor with Tripoint™ technology for accurate activation.
- Slow-closing piston technology.

Installation

- Intended for urinal installations with 3/4" spud coupling connection.

Optional Accessories

GP1118986 Flushometer Extension Kit



ADA

CSA B651

OBC

Codes/Standards

ASME A112.18.1/CSA B125.1

CSA B64

CSA B125.3

ASSE 1037

EPA WaterSense®

ADA

ICC/ANSI A117.1


CSA B651

OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

*11-3/8" (289 mm) minimum with a
6" (152 mm) critical level above the fixture

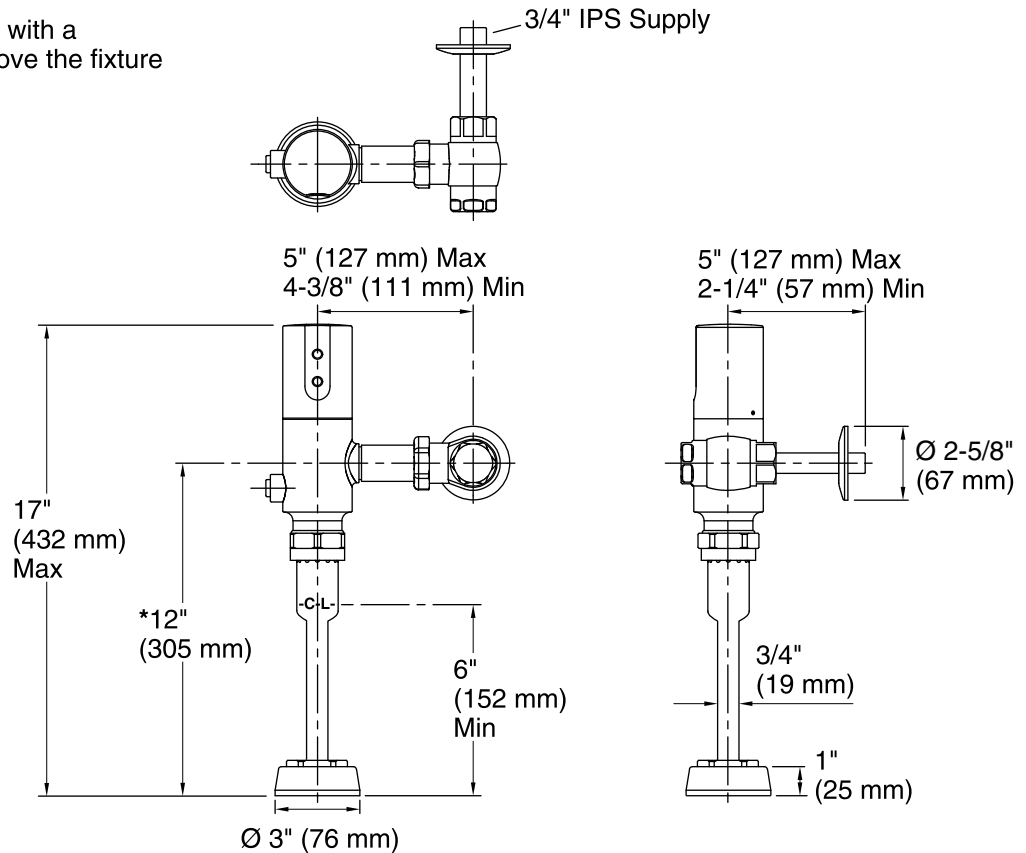

Technical Information

All product dimensions are nominal.

Pressure and Supply Requirements

Fixture flow rate min: 10 gpm (37.9 lpm)

Faucet:

Flow rate: 0.125 gal/min (0.5 l/min)

Pressure: 45 psi (3.1 bar)

Fixture pressure max (static): 80 psi (551.6 kPa)

Power source: AA 1.5 V, included

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.