# **KOHLER**<sub>®</sub>

# Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Elongated bowl offers added room and comfort.
- 1.28 gallons per flush (gpf).
- 2-1/8-inch glazed trapway.
- Standard left-hand Polished Chrome trip lever included.
- Cachet<sup>®</sup> Quiet-Close<sup>™</sup> seat with Quick-Release<sup>™</sup> functionality allows seat to close quietly and quickly unlatch from the toilet for easy removal and convenient cleaning.
- Supply line not included.
- Coordinates with other products in the Archer collection.

# Technology

- Single-flush gravity uses the force of gravity and a precision-engineered tank, bowl, and trapway to create a strong siphon during flushing.
- Class Five<sup>®</sup> flushing technology offers plug- and leak-free performance, extraordinary flushing, and better rinsing power for a cleaner bowl.

## Installation

• Standard 12-inch rough-in.

## Water Conservation & Rebates

- WaterSense<sup>®</sup> toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.
- Eligible for consumer rebates in some municipalities.

## **Recommended Accessories**

K-7637 Angle Supply with Stop (single)

## **Optional Accessories**

#### K-11069 Trip Lever

## Components

Additional included component/s: Tank Cover, Trip Lever, Left Hand, Toilet Seat, Tank Accessory Pack, and Bolt Cap Accessory Pack.





Codes/Standards ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense®

# **KOHLER®** One-Year Limited Warranty

See website for detailed warranty information.

# Available Color/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	lce™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™





Archer®

Toilet **K-3639** 

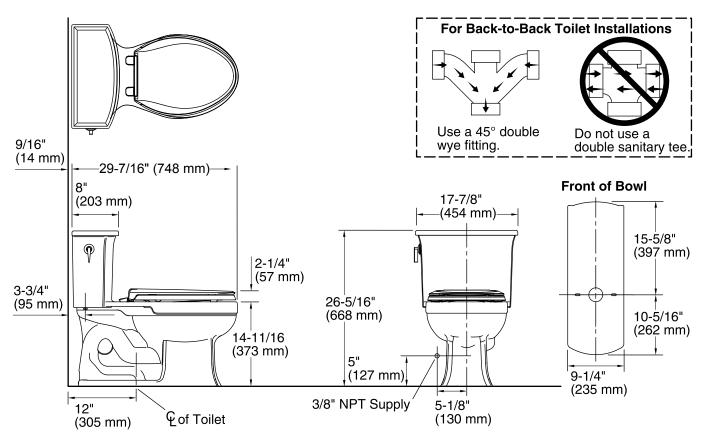

## **Technical Information**

All product dimensions are nominal.			
Toilet type:	One-piece		
Bowl shape:	Elongated front		
Trap passageway:	2-1/8" (54 mm)		
Water Consumption			
Full:	1.28 gpf (4.8 lpf)		
Water surface size:	11-1/2" x 8-1/4" (292 mm x 210 mm)		
Rim to water surface:	5" (127 mm)		
Rough-in:	12" (305 mm)		
Seat-mounting holes:	5-1/2" (140 mm)		

## Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a  $45^{\circ}$  double wye fitting.

