

# Cimarron® Comfort Height® Toilet K-3851-RA

#### **Features**

- Vitreous china.
- Two-piece toilet.
- Comfort Height® Round-front bowl.
- AquaPiston® flushing system.
- Includes right-hand polished chrome trip lever.
- 1.28 gpf (4.8 lpf).
- 2-1/8" (54 mm) fully glazed trapway.
- 10" (254 mm) rough-in.
- Less seat and supply.
- 11" (279 mm) x 8-3/4" (222 mm) water area.
- 27-1/4" (692 mm) x 17-5/8" (448 mm) x 30-1/2" (775 mm).
- Floor mount / Floor outlet.



K-9466-R Right-hand Trip Lever

K-9470-R Right-hand Trip Lever

K-1954 Touchless Toilet Flush Kit

K-4009 Toilet Seat

K-4639 Toilet Seat

K-4644 Toilet Seat

K-4662 Toilet Seat

K-4663 Toilet Seat

K-4689 Toilet Seat

K-4695 Toilet Seat

K-4775 Toilet Seat

K-4816 Toilet Seat

K-5589 Round-Front Toilet Seat

K-5639 Round-Front Toilet Seat

K-7637 Angle Supply with Stop (single)

K-4686-A Toilet Seat

K-4716-T Toilet Seat

#### Components

Product includes:

K-4829 Toilet Bowl

K-4166-RA Toilet Tank

Additional included component/s: Tank cover, Trip lever, Bolt cap accessory pack, and Tank accessory pack.





#### Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

### **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

#### **Available Color/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond






## **Cimarron®**

# Comfort Height® Toilet

K-3851-RA

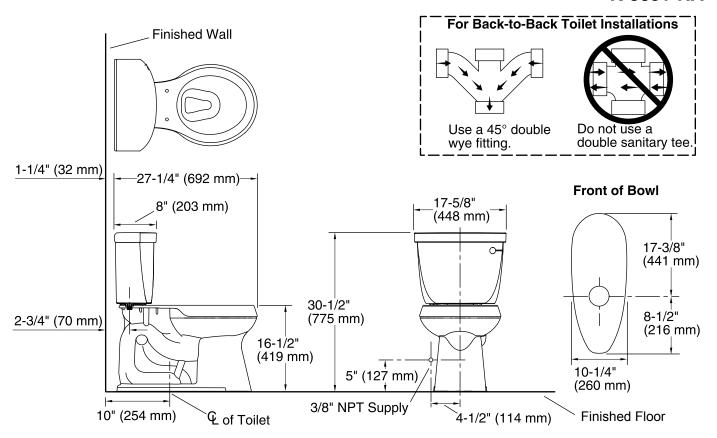

#### **Technical Information**

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor

Bowl shape: Round front
Flush type: AquaPiston
Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 11" x 8-3/4" (279 mm x 222 mm)

Rim to water surface: 5-1/4" (133 mm)
Rough-in: 10" (254 mm)
Seat-mounting holes: 5-1/2" (140 mm)

#### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

