

Cimarron® Comfort Height® Toilet K-3887-U

Features

- Vitreous china.
- Two-piece toilet.
- AquaPiston® flushing system.
- Includes left-hand polished chrome trip lever.
- 1.28 gpf (4.8 lpf).
- 2-1/8" (54 mm) fully glazed trapway.
- 12" (305 mm) rough-in.
- Less seat and supply.
- 11-1/2" (292 mm) x 9-1/4" (235 mm) water area.
- 27-1/4" 692 mm) x 17-5/8" (448 mm) x 30-1/2" (775 mm).
- Floor mount / Floor outlet.
- Insuliner® tank liner included.

Optional Accessories

K-9466-L Left-hand Trip Lever

K-9470-L Left-hand Trip Lever K-4009 Toilet Seat

K-4009 Tollet Seat

K-4639 Toilet Seat

K-4644 Toilet Seat

K-4662 Toilet Seat

K-4663 Toilet Seat

K-4689 Toilet Seat

K-4695 Toilet Seat

K-4775 Toilet Seat

K-4816 Toilet Seat

K-5589 Round-Front Toilet Seat

K-5639 Round-Front Toilet Seat

K-7637 Angle Supply with Stop (single)

K-4686-A Toilet Seat

K-4716-T Toilet Seat

Components

Product includes:

K-4347 Comfort Height® Round-front Bowl

K-4166-U Toilet Tank

Additional included component/s: Tank cover, Trip lever, Bolt cap accessory pack, and Tank accessory pack.





Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA

ICC/ANSI A117.1

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color Code Description

Color tiles intended for reference only.

<i>,</i> 0.0.	Oouc	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	7	Black BlackTI






Cimarron®

Comfort Height® Toilet

K-3887-U

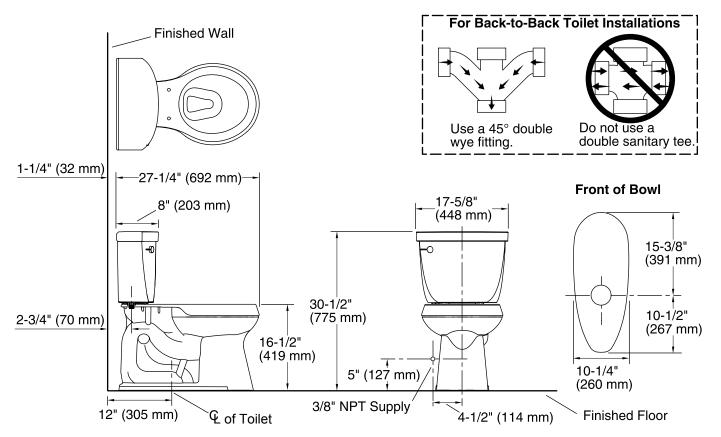

Technical Information

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor

Bowl shape: Round front
Flush type: AquaPiston
Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 11" x 9-1/4" (279 mm x 235 mm)

Rim to water surface: 5-1/4" (133 mm)
Rough-in: 12" (305 mm)
Seat-mounting holes: 5-1/2" (140 mm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

The Model Plumbing Codes require elongated toilets for public bathrooms.

ADA compliant when installed to the specific requirements of these regulations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats on public bathrooms.

