

# Kathryn® Comfort Height® Toilet K-3940

#### **Features**

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Elongated bowl offers added room and comfort.
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- 1.28 gallons per flush (gpf).
- Concealed trapway facilitates easy cleaning and enhances design.
- Standard left-hand Polished Chrome trip lever included.
- Grip-Tight Glenbury Quiet-Close<sup>™</sup> seat with Quick-Release<sup>™</sup> functionality allows seat to close quietly and quickly unlatch from the toilet for easy removal and convenient cleaning.
- Supply line not included.
- Coordinates with other products in the Kathryn collection.

#### **Technology**

- Single-flush gravity uses the force of gravity and a precision-engineered tank to create a strong siphon during flushing.
- AquaPiston canister allows water to flow into the bowl from all sides (360 degrees), increasing the power and effectiveness of the flush.
- Flush valve's 3:2 ratio harnesses the natural force of gravity and optimizes flush performance.
- Durable canister design has 90% less exposed seal material than a 3-inch flapper, for leak-free performance.
- Light-touch canister flush requires a lower actuation force than a flapper.

#### Installation

Standard 12-inch rough-in.

#### **Water Conservation & Rebates**

- WaterSense® toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.
- Eligible for consumer rebates in some municipalities.

#### **Recommended Accessories**

K-7637 Angle Supply with Stop (single)

#### **Optional Accessories**

K-9131 Trip Lever K-4650 Toilet Seat

#### Components

Product includes:

K-4733 Toilet Seat

Additional included component/s: Tank cover, trip lever, tank accessory pack, and bolt cap accessory pack.





## ADA CSA B651 Codes/Standards

ASME A112.19.2/CSA B45.1 EPA WaterSense® ADA ICC/ANSI A117.1 CSA B651 OBC

#### **Kohler One-Year Limited Warranty**

See website for detailed warranty information.

#### Available Color/Finishes

Color tiles intended for reference only.


| Color | Code | Description   |
|-------|------|---------------|
|       | 0    | White         |
|       | 96   | Biscuit       |
|       | 47   | Almond        |
| 300   | NY   | Dune          |
|       | 95   | Ice™ Grey     |
|       | G9   | Sandbar       |
|       | 33   | Mexican Sand™ |
|       | K4   | Cashmere      |
|       | 58   | Thunder™ Grey |
| 415   | 7    | Black Black™  |





### **Kathryn®**

Comfort Height® Toilet K-3940

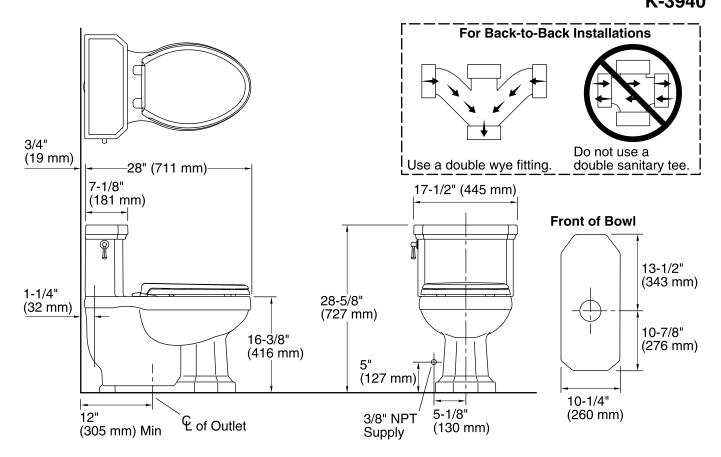

#### **Technical Information**

All product dimensions are nominal. Toilet type: One-piece Bowl shape: Elongated front Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 10-1/2" x 7-1/2" (267 mm x 191 mm)

Rim to water surface: 5-5/8" (143 mm) Rough-in: 12" (305 mm) Seat-mounting holes: 5-1/2" (140 mm)

#### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45 degree double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats on public bathrooms.



