

Wellworth®

Class Five® Toilet K-3978-T

Features

- Vitreous china.
- Two-piece toilet.
- Regular height Elongated bowl.
- Class Five® flushing system.
- Includes left-hand polished chrome trip lever.
- 1.6 gpf (6.0 lpf).
- 2-1/8" (54 mm) fully glazed trapway.
- 12" (305 mm) rough-in.
- Less seat and supply.
- 11-1/4" (286 mm) x 8-1/4" (210 mm) water area.
- 30" (762 mm) x 18" (457 mm) x 29-1/4" (743 mm).
- Floor mount / Floor outlet.
- Tank cover locks included.

Optional Accessories

K-4008 Toilet Seat

K-4108 Toilet Seat with Cleansing Functionality

K-4636 Toilet Seat

K-4652 Toilet Seat

K-4659 Toilet Seat

K-4684 Toilet Seat

K-4688 Toilet Seat

K-4694 Toilet Seat

K-4709 Toilet Seat with Cleansing Functionality

K-4737 Toilet Seat with Cleansing Functionality

K-4748 Toilet Seat

K-4774 Toilet Seat

K-4814 Toilet Seat

K-5588 Elongated Toilet Seat

K-5638 Elongated Toilet Seat

K-7637 Angle Supply with Stop (single)

K-9379 Trip Lever

K-4712-T Toilet Seat

K-4761-BN Toilet Seat

K-4761-CP Toilet Seat

Components

Product includes:

K-4198 Elongated Bowl

K-4468-T Toilet Tank

Additional included component/s: Tank cover, Trip lever, Bolt

cap accessory pack, and Tank accessory pack.



Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 California Energy Commission (CEC)

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	7	Black Black™






Wellworth®

Class Five® Toilet

K-3978-T

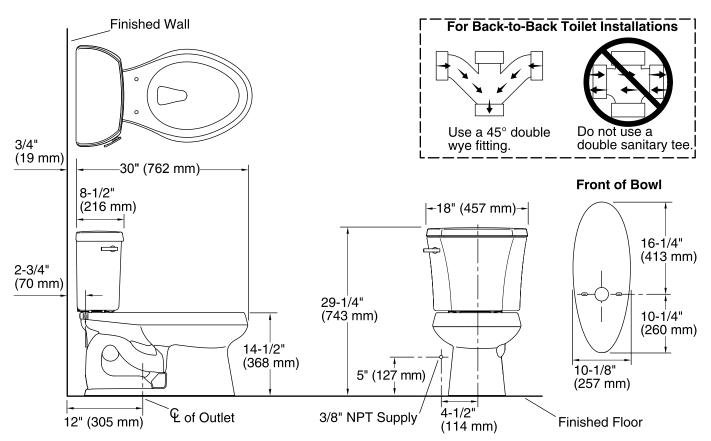

Technical Information

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor

Bowl shape: Elongated front Flush type: Class Five Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.6 gpf (6 lpf)

Water surface size: 11-1/4" x 8-1/4" (286 mm x 210 mm)

Rim to water surface: 5-1/4" (133 mm)
Rough-in: 12" (305 mm)
Seat-mounting holes: 5-1/2" (140 mm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

