

Elmbrook

Comfort Height® Two-piece Toilet K-45983

Features

- Vitreous china.
- Comfort Height® elongated bowl.
- Class Five® flushing system.
- Includes seat, cover, wax ring, left-hand polished chrome trip lever and floor hardware.
- Less supply line.
- 1.28 gpf (4.8 lpf).
- 12" (305 mm) rough-in.
- 2-1/8" (54 mm) fully glazed trapway.
- 11" (279 mm) x 8-3/4" (222 mm) water area.
- 29-1/4" (743 mm) x 18-5/16" (465 mm) x 30-1/16 (764 mm).

Optional Accessories

K-7637 Angle Supply with Stop (single)

Components

Product includes:

K-4774 Toilet Seat

K-4306 Toilet Bowl

K-4139 Toilet Tank

Additional included component/s: Tank cover, Trip lever, and Floor mounting kit.





ADA CSA B651

OBC

Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description


White



KOHLER®

Elmbrook

Comfort Height® Two-piece Toilet K-45983

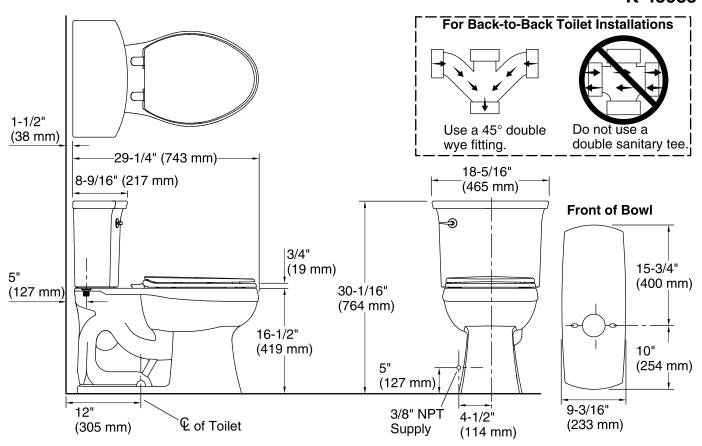

Technical Information

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor

Bowl shape: Elongated front
Flush type: Gravity siphon jet
Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 11" x 8-3/4" (279 mm x 222 mm)

Rim to water surface: 6" (152 mm)

Rough-in: 12" (305 mm)

Seat-mounting holes: 5-1/2" (140 mm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats on public bathrooms.

