

## Steward® Waterless Urinal K-4919

#### **Features**

- Constructed of vitreous china.
- 31-7/8"H, 19-1/8"W, 15-7/8"D
- Cartridge-free waterless urinal functionality.
- Saves up to 40,000 gallons of water per fixture per year and significantly reduces sewage and maintenance costs.
- Cartridge-free integral trapway provides enhanced performance and less maintenance.
- Optimized interior design virtually eliminates splashing.
- Touch-free design is vandal resistant and offers added hygiene to users.
- This product can help a building earn Water Efficiency points in the LEED Green Building Rating System<sup>™</sup>. See specification sheet for water use data.



Additional included component/s: 2" Outlet Spud, Hanger (2 Required), Universal Mounting Bracket, Removable Strainer, 3 oz (89 ml) Sealing Liquid Sample, Cleaner Sample, and Urinal Ball Sample.



ADA

#### Codes/Standards

ASME A112.19.2/CSA B45.1 ASME A112.19.19 ADA ICC/ANSI A117.1

### **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

#### **Available Color/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	7	Black Black™





# Steward®

Waterless Urinal

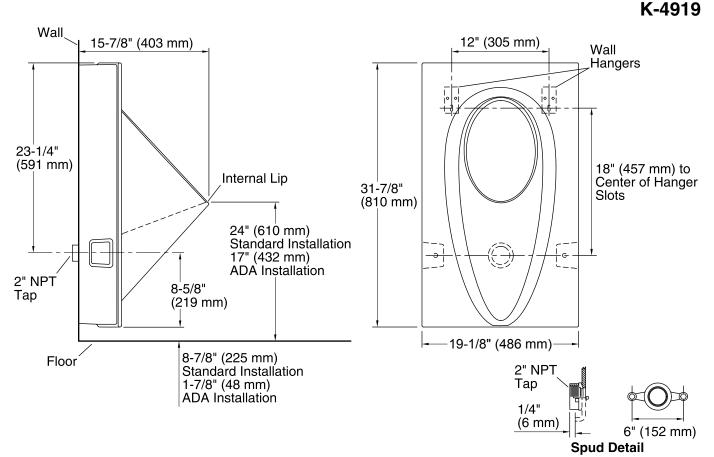

#### **Technical Information**

All product dimensions are nominal.

Flush outlet Waterless

technology:

Spud size: 2", Outlet, Rear

#### **Notes**

Install this product according to the installation guide.

NOTICE: For ADA compliance, measurement must be from the floor to the top of the internal lip.

CAUTION: Risk of property damage. When connecting waterless urinals to the building drain waste vent system, do not use copper pipe or copper tube connectors. The use of a copper connector will result in corrosion of the connector and potential building structure damage caused by leakage.

ADA compliant when installed to the specific requirements of these regulations.

