

# Comfort Height® Touchless Toilet K-6418

#### Features

- Vitreous China
- Elongated Bowl
- Comfort Height<sup>®</sup>
- AquaPiston<sup>®</sup> flushing system
- Touchless Technology allows hands-free operation to actuate the flush
- Less seat and supply
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) glazed trapway
- 10-1/2" (267 mm) x 7-7/8" (200 mm) water area.

#### Installation

- 12" (305 mm) rough-in
- 28-3/4" (730 mm) x 17-5/8" (448 mm) x 30-3/4" (781 mm)

#### **Optional Accessories**

K-4774 Toilet Seat K-4888 Elongated Toilet Seat K-7637 Angle Supply with Stop (single)

#### Components

Product includes: K-4309 Elongated Toilet Bowl K-5692 Toilet Tank Additional included component/s: Bowl, Tank, Tank Cover, and Touchless Flush Kit.





#### Codes/Standards ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992

EPA WaterSense<sup>®</sup> California Energy Commission (CEC)

#### KOHLER<sup>®</sup> One-Year Limited Warranty

See website for detailed warranty information.


#### Available Color/Finishes

Color tiles intended for reference only.

#### Color Code Description

0	White
96	Biscuit
47	Almond
NY	Dune
95	lce™ Grey


- G9 Sandbar
  - 7 Black Black™





## Cimarron®

Comfort Height<sup>®</sup> Touchless Toilet K-6418

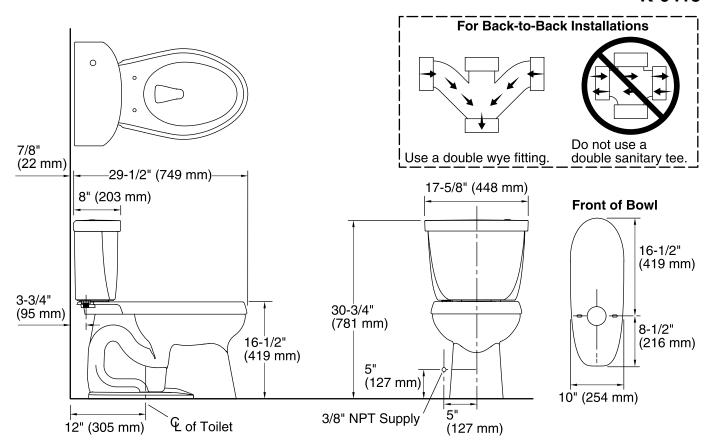

### **Technical Information**

**KOHLER** 

All product dimensions are nominal.			
Toilet type:	Two-piece		
Bowl shape:	Elongated front		
Trap passageway:	2-1/8" (54 mm)		
Water Consumption			
Full:	1.28 gpf (4.8 lpf)		
Water surface size:	10-1/2" x 7-7/8" (267 mm x 200 mm)		
Rim to water surface:	6-3/8" (162 mm)		
Rough-in:	12" (305 mm)		
Seat-mounting holes:	5-1/2" (140 mm)		

#### Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a  $45^{\circ}$  double wye fitting.

